





3 Optional Reflect-cup




Features

- LUNA pendant luminaires 5IN-1, functional option.
- 1" UP&DOWN installation
Module-replaceable up lighting by Magntic connection
- Different color reflect-cup with lens
-PC reflector cup type offers nice glare-control,
protecting people's eye perfectly;
- 10" Fast Connection
-No Screws; Gapeless; Inner electrical connection
- 4-in-1 Installations
-Suspension;
-Surface Mounting;
-Wall Mounting;
-Deep Recessed Mounting.
- 3CCT By Switch dips,
stock saving and much economic
- Module Replaceable

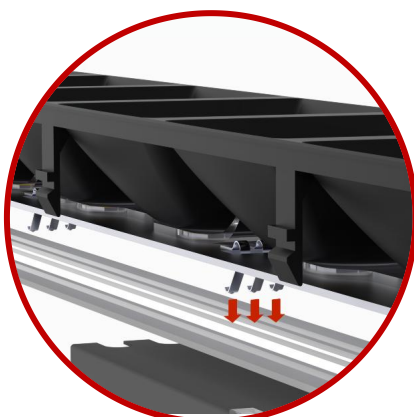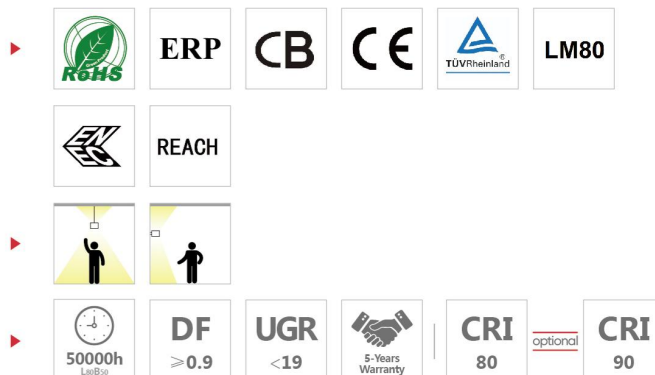


| PRODUCT DESCRIPTION

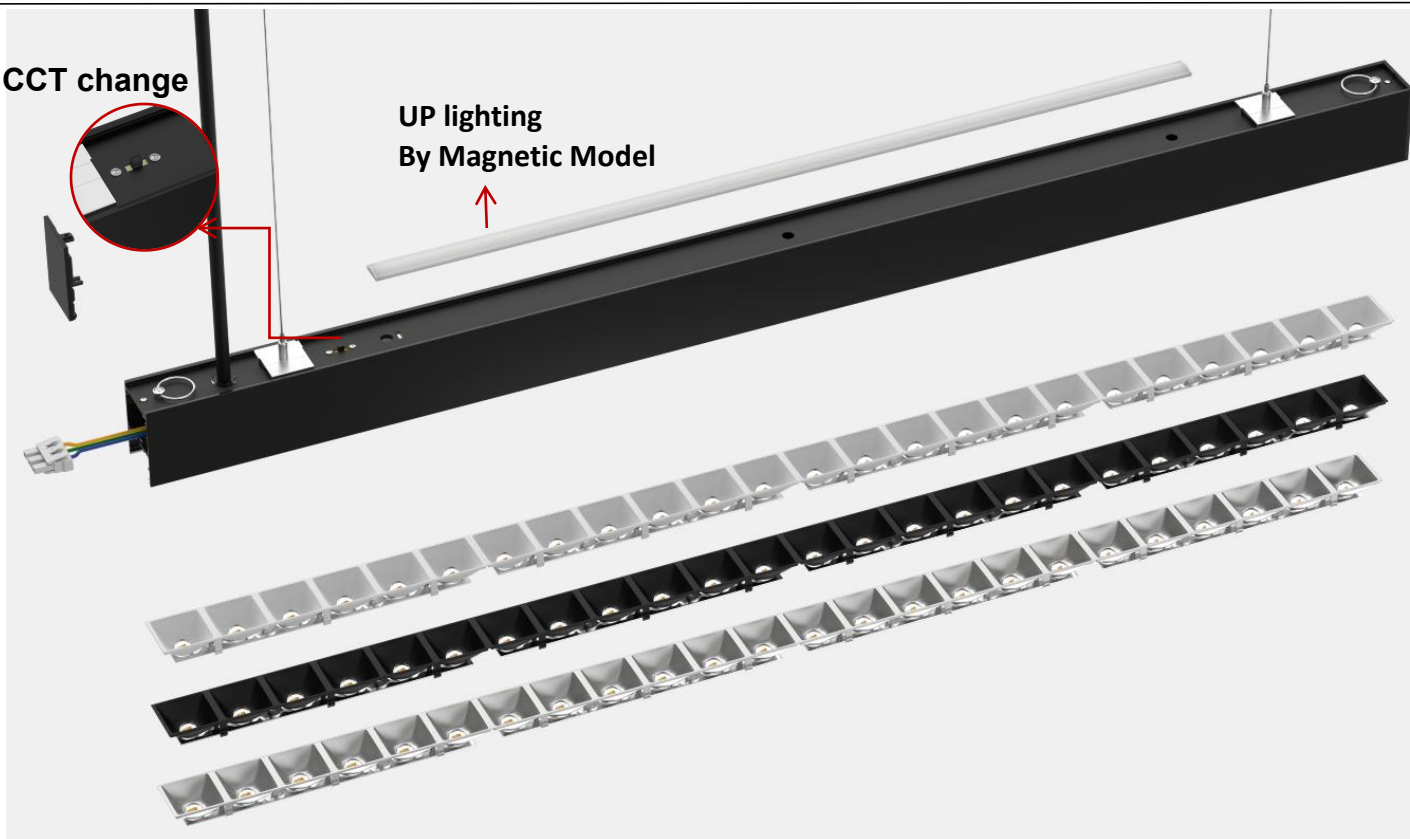


Features:

- $80^{\circ} \pm 5^{\circ}$ beam angle , offering nice glare-control, protecting people's eye perfectly
- Long lifetime + 5 years warranty
@L80B10 up to 50000h
@L70B10 up to 75000h
- Modern and fashion design have more competitive


Luminous Intensity Distribution Curve

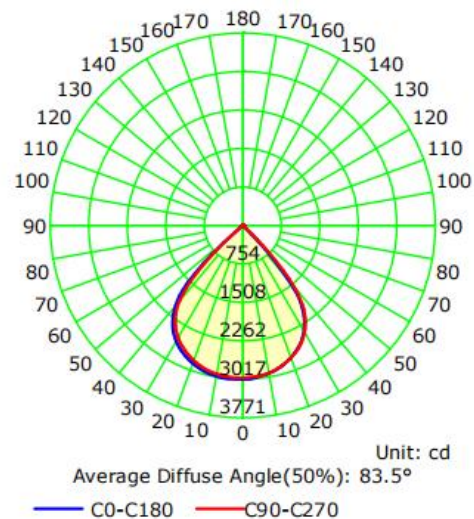


| PRODUCT DESCRIPTION

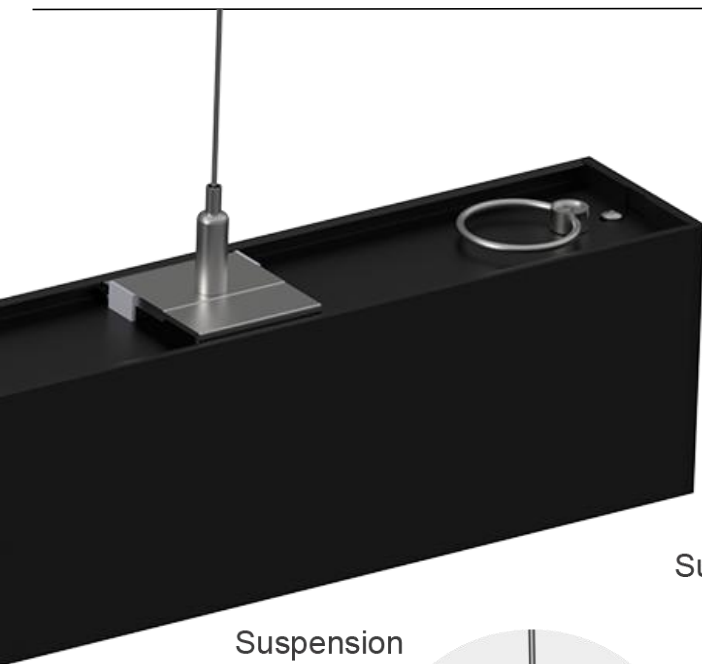

Suspension

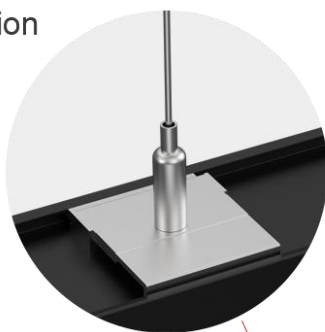


Surface Mounting

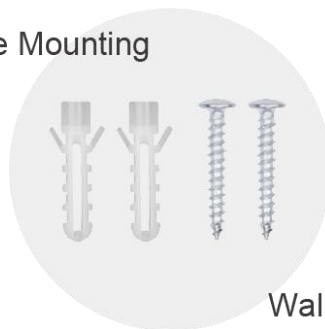

Wall Mounting




Deep Recessed Mounting

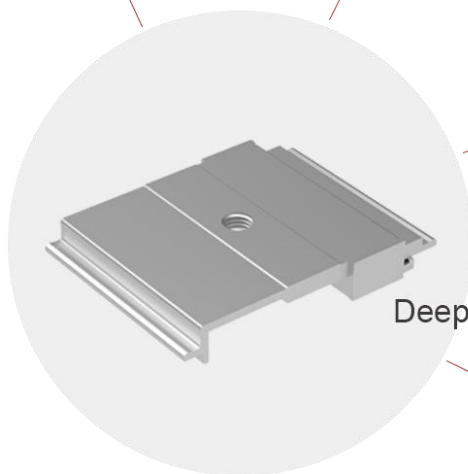

4-in-1 Installations



| PRODUCT DESCRIPTION


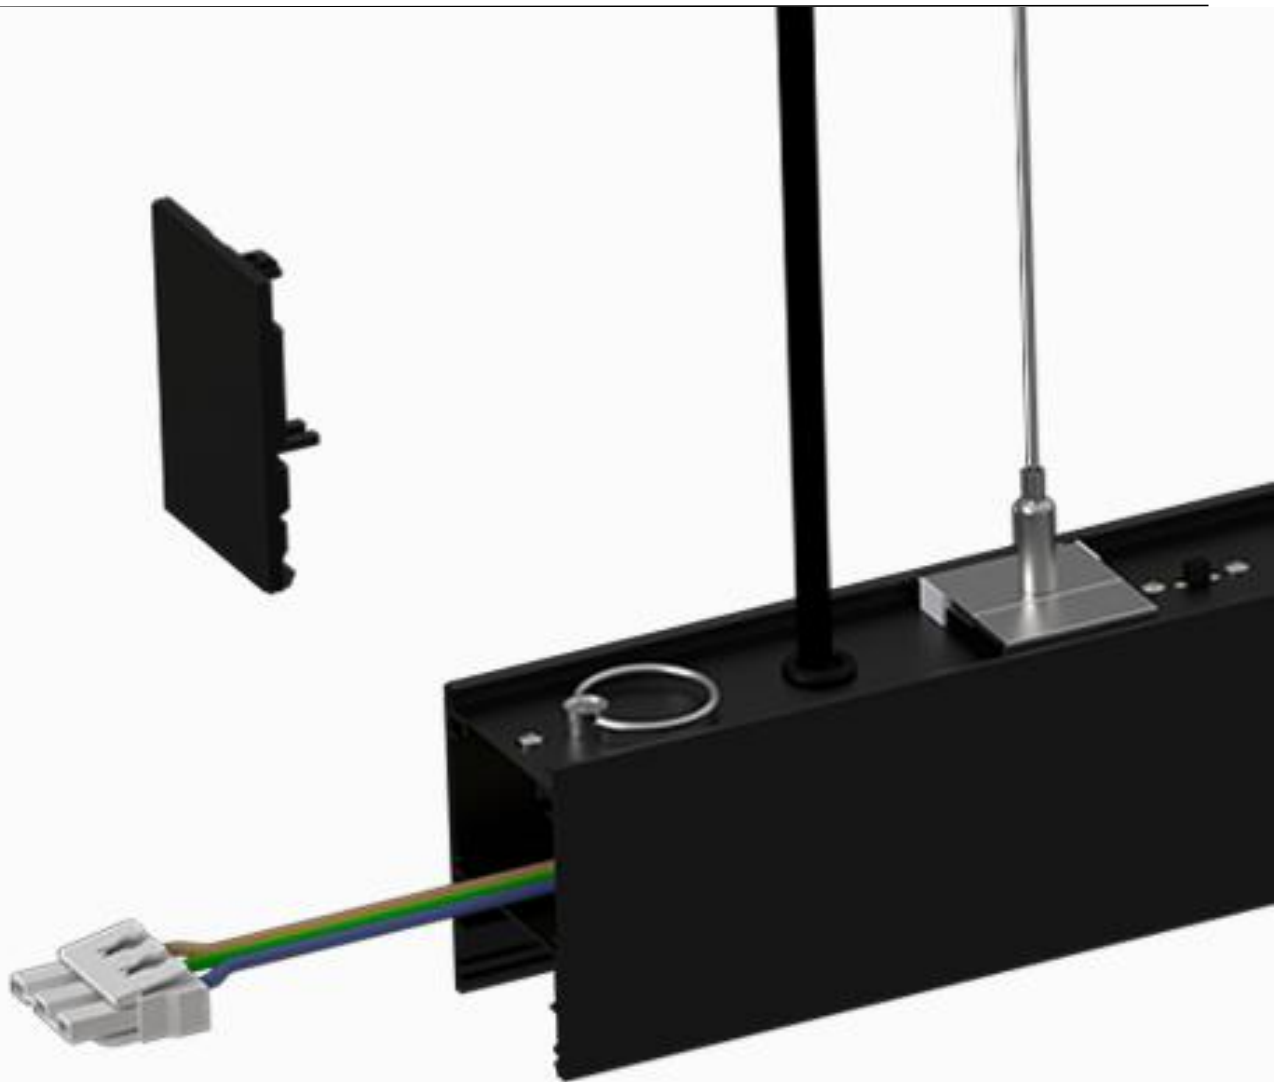


- 10" Fast Connection
 - No Screws
 - Gapeless
 - Inner electrical connection





| PRODUCT DESCRIPTION



- L-shape
unilluminous

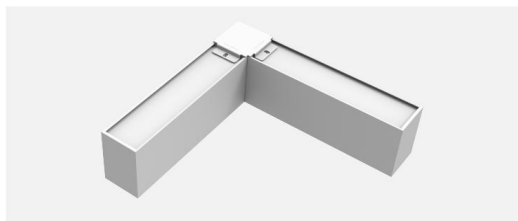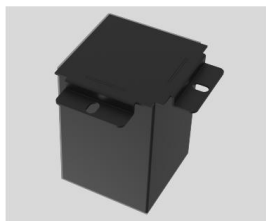

- T-shape
unilluminous

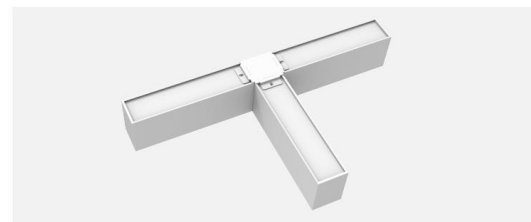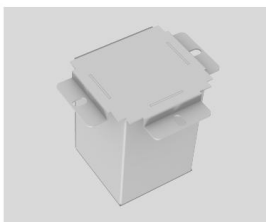

- X-shape
unilluminous

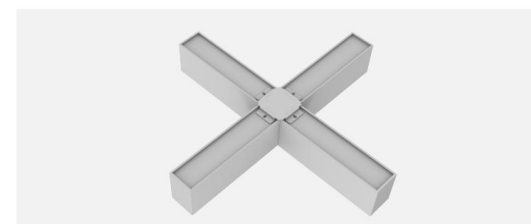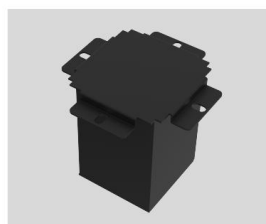

Accessories:

- Without LED SPCC connector




|LEDS



Standard 2835 package to address retrofit applications

2835 Series is a complementary portfolio with optimized performance and bin construction for the retrofit space. With an industry standard footprint, it provides the perfect balance between performance and cost efficiency for a variety of applications.

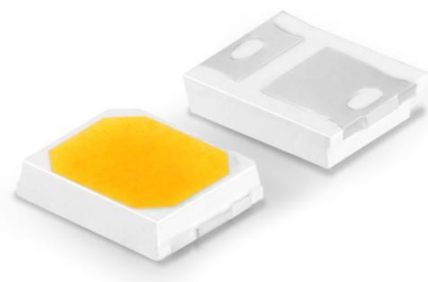

| DRIVER-Brand optional



Product description :

- Constant current LED driver(**on and off**)
- Luminaires of protection class I
- Up to 88% % efficiency
- Nominal lifetime up to 50,000h
- 5 years guarantee



Product description :


- Constant current LED driver(**dali+push+0-10V**)
- Luminaires of protection class I
- Up to 89% % efficiency
- Nominal lifetime up to 50,000h
- 5 years guarantee

• on-and-off



- DALI control~D4i/DT6/DT8
- DALI +PIR/Daylight SENSOR
- DALI +BLUETOOTH

- Up to 89% % efficiency
- Nominal lifetime up to 50,000h
- 5 years guarantee

Approval marks



Product Information

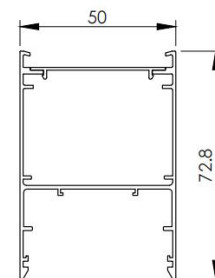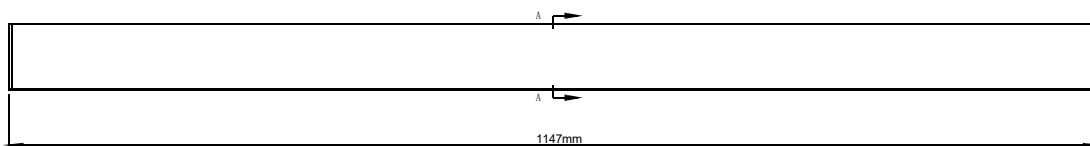

Specifications--Reflector Diffuser

Item	Size(mm)	Power(W)	Lumen (lm/w)	Beam Angel	DF	UGR	Housing Color	Colour Temperature
ESLL-LN5070-60-15W-WH-WH	L577×W50×H72.8mm	15	140/160	105°-DL 85°-UL	>0.9	<19	WHITE/BLACK	2700K/4000K/6500K
ESLL-LN5070-60-15W-SL-WH								
ESLL-LN5070-60-15W-BLK-WH								
ESLL-LN5070-120-30W-WH-WH	L1147×W50×H72.8mm	30						
ESLL-LN5070-120-30W-SL-WH								
ESLL-LN5070-120-30W-BLK-WH								
ESLL-LN5070-150-38W-SL-WH	L1432×W50×H72.8mm	38						
ESLL-LN5070-150-38W-WH-WH								
ESLL-LN5070-150-38W-BLK-WH								



|Areas of application



Used in different application area

- Office buildings / Schools
- High-end supermarkets / Shopping malls
- Hotels and other public buildings

