


ZJESL[®]

PRODUCT SPECIFICATION

Version : V2.0

ITEM CODE: 230216300001

MODEL NO.: ESUP-RH030-0001

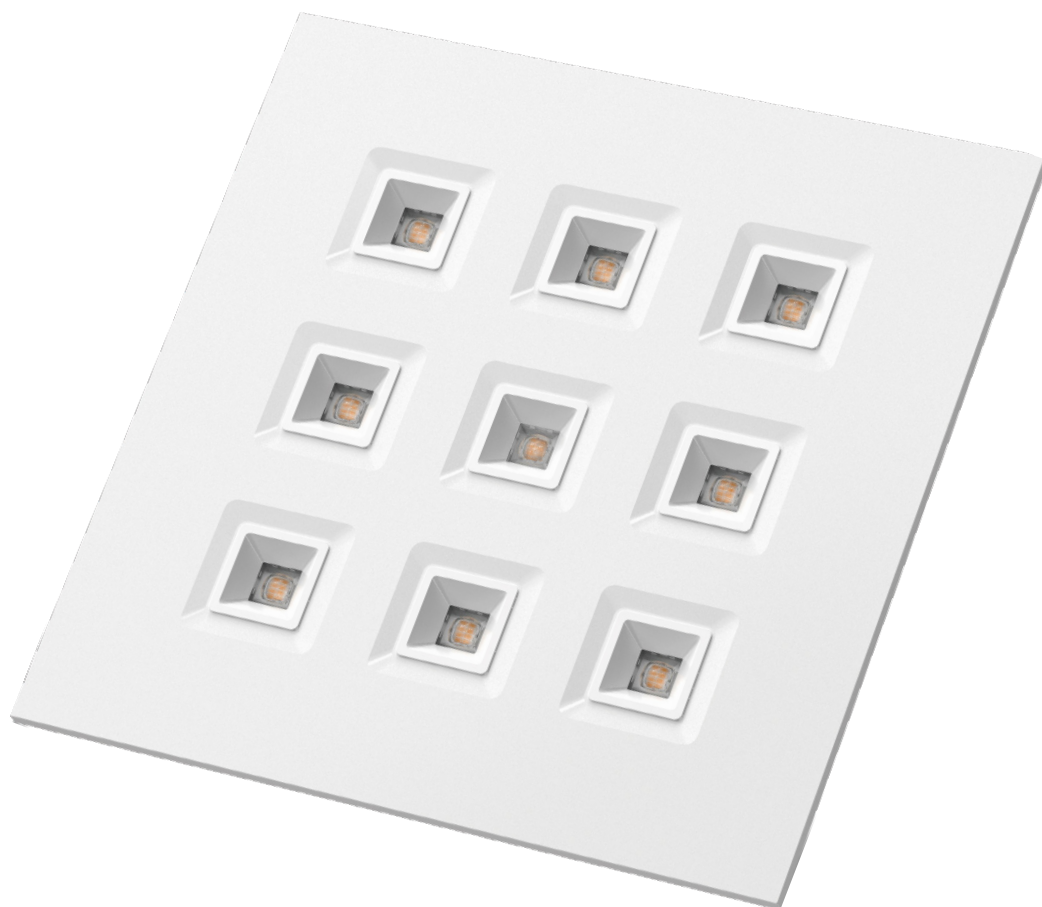

Rhea

www.zjesl.com

HAINING ESL ELECTRICAL LIGHTING APPLIANCE Co.,LTD

Product Specification



UGR
<16

luminous
flux
140lm/w

Replacement
module

Features

- 85° beam angle & UGR < 16 spot lighting, make light more comfortable
- Long lifetime @ L80B10 up to 50000h, 5 years warranty
- SPCC luminaire body with die-cast metal ends, Premium design
- Replaceable module





Accessories

Suspension hanging wire
Surface mounted frame

Areas of application:


Office
School, classroom
supermarket
Library

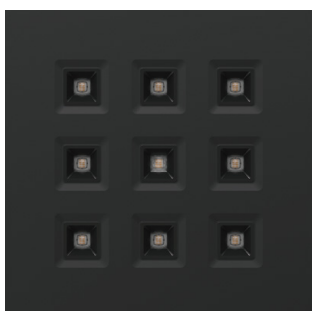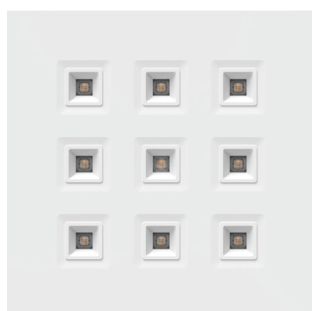

White



Black

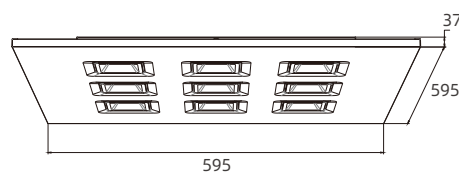

■ Product Specification

Rated Input Voltage Range	200-240VAC 200-240VDC
Driver Frequency	50/60HZ
Rated output voltage range	6-38/40/42VDC
Input Current	<0.18A
Power	30W
PF	≥0.95(230VAC & Output full load)
Luminous flux (30 min steady state)	4092lm
Luminous Efficiency	140lm/W
CCT	4000K
Ra	≥80
SDCM	<3
UGR	<16
Work environment	temperature: -20℃~40℃; relative humidity: 10%~85%
IP	IP20
Protection against electric shock category	CLASS II
Installation Way	Suspension 、 Surface Mounted 、 Recessed
Power connection mode	External
Drive brand	BOKE
Driver type	BK-DEL030-B0800AD
control mode	DALI
Housing material/color	SPCC ; white(RAL9003) black(RAL9004)
Material	SPCC housing
Reflect-cup	PC
Optic Lens	PC
Executive standard	GB 7000.1 GB 7000.201
Electric strength	2U+1000VAC 5mA 1min
Life Time	50000H@L80B10
can be spliced or the maximum number of splices	un-Linkable
Replaceable or not	Replaceable
IK	03
Warranty	5 years

■ Technical specifications of main structural components

Modules Are Replaceable




INSTALLATION


■ *Recessed in the ceiling*



■ *Surface mounted installation*

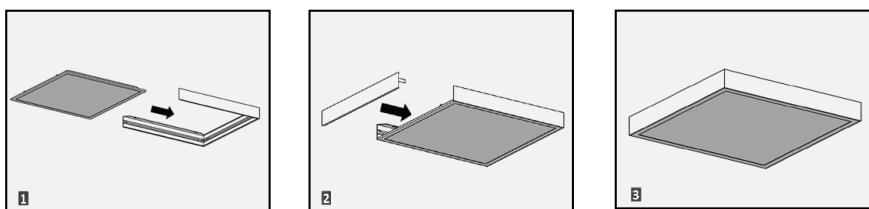


■ *Suspension hanging installation*

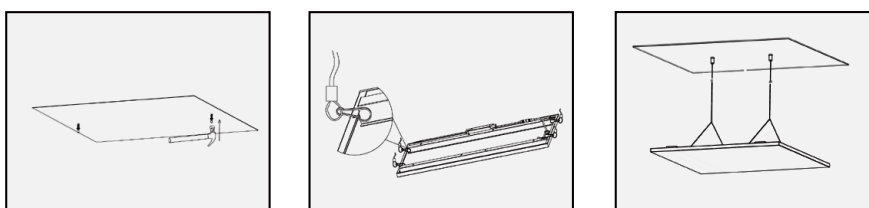


Technical specifications of main structural components

Test Simulation


■ Luminous Intensity Distribution Curve

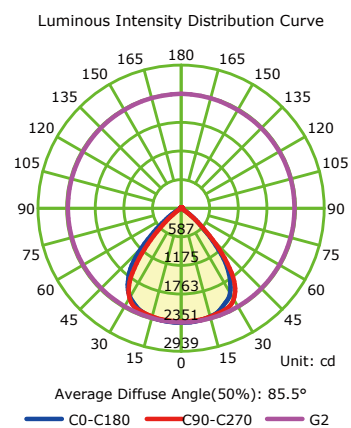

■ Dialux

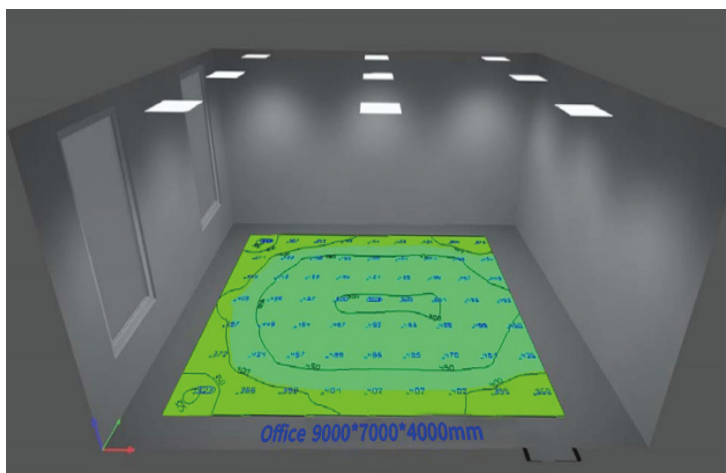


Dali Dimming Application

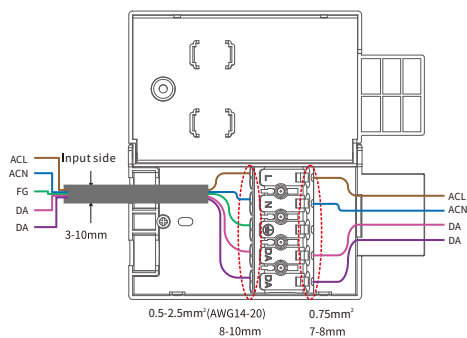


■ Packaging information


■ Product Label

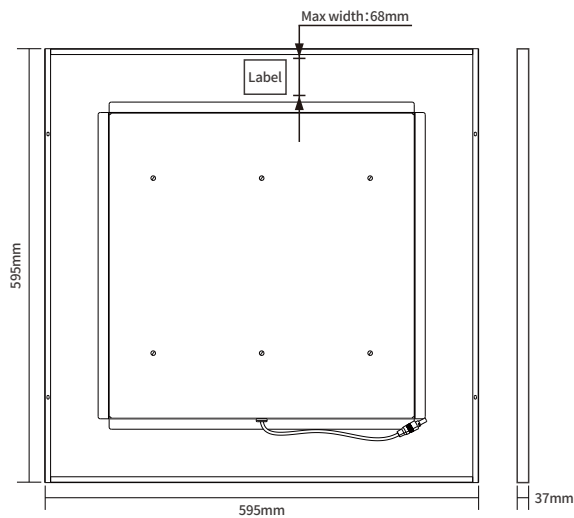

■ Inner & Outer Box Label




N.W. (net weight): 3.4kg

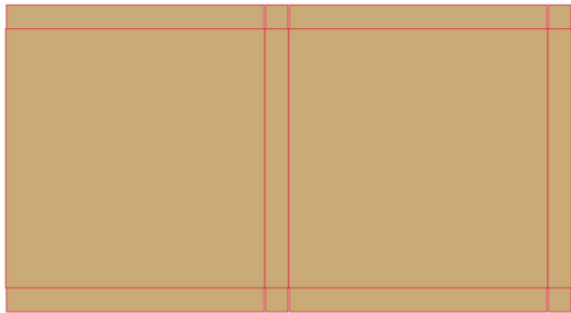

■ 1PC/ inner box

Brown Inner box (B corrugate 650*60*650mm)

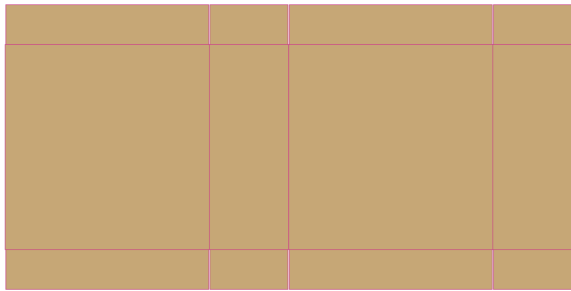

■ 4PCS/ outer box

Brown outer box (AB corrugate 670*260*670mm)

Gross weight/ outer box: 16.9kg