

ZJESL®

PRODUCT

COLLECTION

2023

HAINING ESL ELECTRICAL LIGHTING APPLIANCE CO.,LTD

HAINING ESL ELECTRICAL LIGHTING APPLIANCE CO.,LTD

Add: No.3 Haiyuan Road Haining City Zhejiang Prov, China
Tel: 0086 573 87382056 13967361213
E-mail: info@zjesl.com



www.zjesl.com

SINCE
2013

OUR CORE VALUES

Customer centric
以客户为中心

CORPORATE PHILOSOPHY

Struggle to make the ordinary shiny

No complaint

Strictness equals great love

企业哲学 | 奋斗让平凡发光 不说一句抱怨的话 严格就是大爱

ABOUT US

Haining ESL Lighting Appliance Co., Ltd., established in 2013, is located in Haining high-end, international, personalized and multi-functional pan semiconductor industrial park, with a plant area of 18000 square meters.

We are a scientific and technological enterprise integrating R & D, production, sales, lighting design and engineering projects. Committed to intelligent, energy-saving, high-efficiency, green environmental protection and health lighting research and development, from time to time through independent research and development, cooperative development, customer customization and other means to launch new products. It is highly focused on product quality and strictly controls all aspects of production. It has obtained ISO quality system certification, energy saving product certification, EU CE certification, Germany GS certification, European ENEC and RoHS certification. It has a number of patents and an expanding R & D team. Now the main products are led panel light, led linear light, modular light, using advanced production equipment and testing equipment, develop strict testing requirements, there are a number of semi-automatic production lines to meet the diverse needs of customers. Products are exported to Europe, Africa, Oceania, North and South America and Asian countries. Our light is lit up in different regions of the world. Our corporate vision is to provide high-quality light for the world. Our cultural management philosophy is: customer achievement, teamwork, hard work, integrity, openness, win-win. With a Chinese heart serving the whole world, we can continuously deliver high-quality light for the world, forge ahead bravely, set up the tide bravely, strive for perfection, and be a lighting enterprise with a sense of social responsibility, feelings, dreams and technologies, so as to convey the love and responsibility of a Chinese private enterprise to the world.




10


10 YEARS OF ODM MANUFACTURING EXPERIENCE
拥有10年ODM制造经验



- Most Labor-saving
- Linkable Fast Connection
- Without Screws

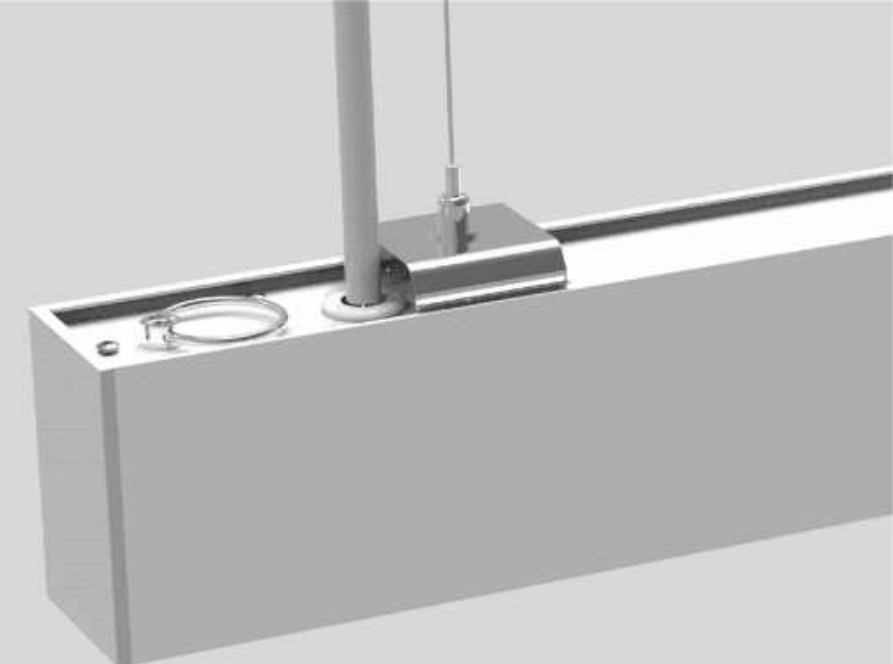


Perse

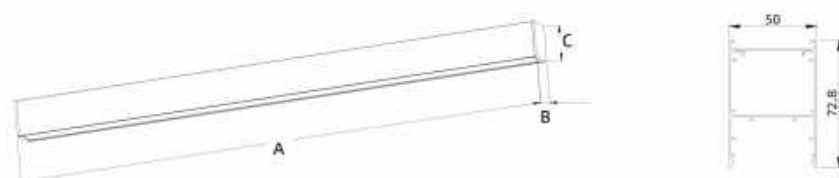

Perse led linear light use PC diffuser and Aluminum house, removable back plate. Fast linkable without screws, support rolling PC diffuser to achieve most labor saving. Many differet linkable solutions depend on customized design. It's an optimal choice.


Without LED

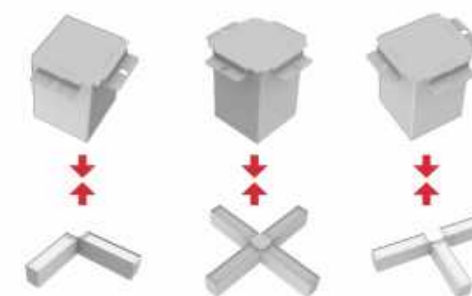

With LED




Luminous Intensity Distribution Curve

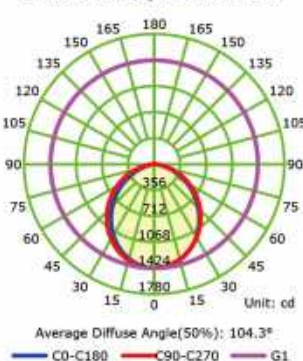


Opal diffuser
Beam Angle : 104.3°
Up to 130LM/W

Luminous Intensity Distribution Curve

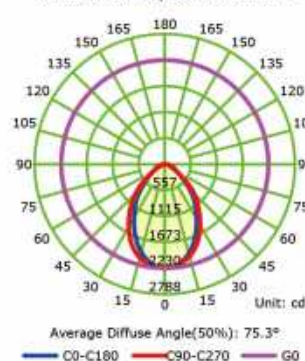

Prismatic diffuser
Beam Angle : 75.3°
Up to 110LM/W


Luminous Intensity Distribution Curve

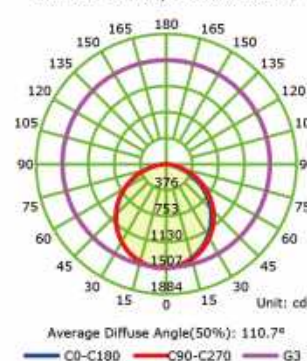

Rolling opal diffuser
Beam Angle : 110.7°
Up to 130LM/W

Item No.	Power(w)	Lumen efficiency(lm/w±10%)	Size(AxBxCmm)	Q'ty/CTN
ESLL-PE15	15	100/120	600x50x72.8	9PCS
ESLL-PE30	30	100/120	1200x50x72.8	9PCS
ESLL-PE38	38	100/120	1500x50x72.8	9PCS
ESLL-PE45	45	100/120	1800x50x72.8	4PCS
ESLL-PE60	60	100/120	2400x50x72.8	4PCS
ESLL-PE75	75	100/120	3000x50x72.8	4PCS


Perse-L

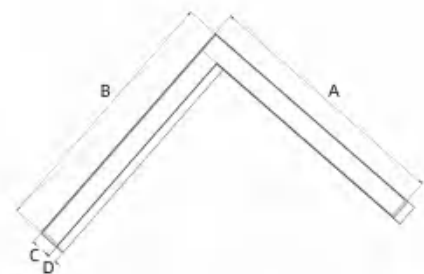

PERSE "L" linear is not only a single linear lamp, but also could help to make different style designs. She is independant, slim, simple and with elegant appearance.



Luminous Intensity Distribution Curve

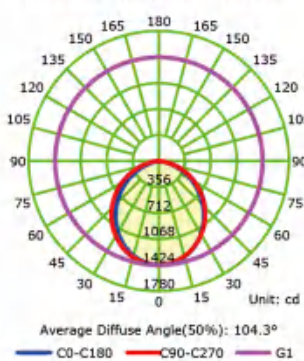




Nyx CCT&Power switch-dimmable




Nyx linear can adjust Power and Color temperature with dip switch, reducing inventory, higher flexibility, satisfy complex needs of more different customers.

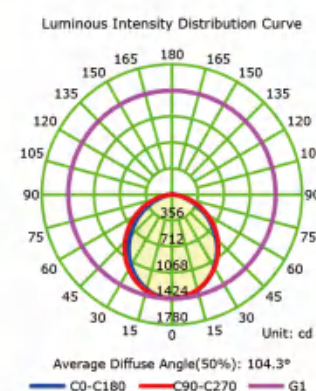

Opal diffuser

Beam Angle : 104.3°
Up to 130LM/W

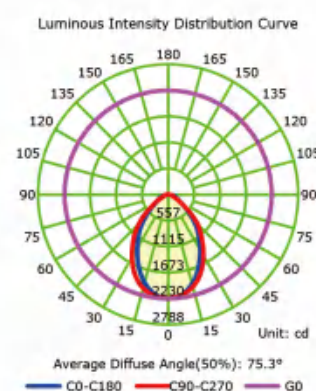

Prismatic diffuser

Beam Angle : 75.3°
Up to 110LM/W


Item No.	Power(w)	Lumen efficiency(lm/w±10%)	Size(AxBxCmm)	Q'ty/CTN
ESLL-NY16&29	16&29	100/120	1200x50x72.8	9PCS
ESLL-NY18&35	18&35	100/120	1500x50x72.8	9PCS



Leto




Leto led linear light use PC opal and microprism diffuser, with Aluminum Housing, powered by CE driver to have an economical lighting solution for commercial areas.

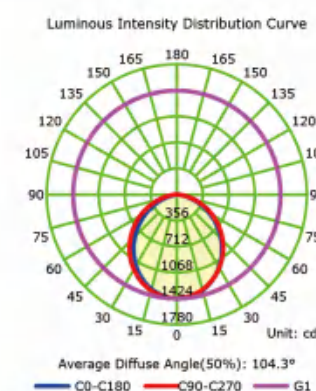

Opal diffuser

Beam Angle : 104.3°
Up to 130LM/W

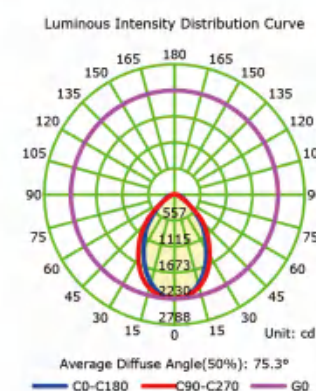


Prismatic diffuser

Beam Angle : 75.3°
Up to 110LM/W




Item No.	Power(w)	Lumen efficiency(lm/w±10%)	Size(AxBxCmm)	Q'ty/CTN
ESLL-LE20	20	100/120	600x50x72.8	9PCS
ESLL-LE30	30	100/120	1200x50x72.8	9PCS
ESLL-LE40	40	100/120	1500x50x72.8	9PCS



Iris Smart linear light

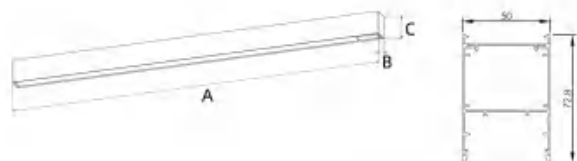

Iris model represents all products in the smart family series product, here include PIR&Daylight sensor, CCT&dimable by 2.4G remote controller, bluetooth control options. Please contact us confirm which options is your needed.

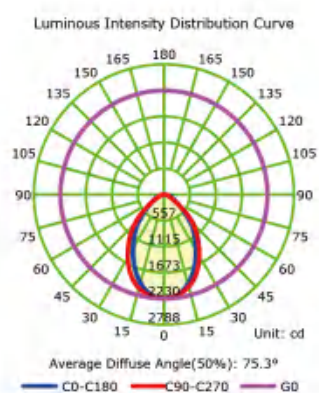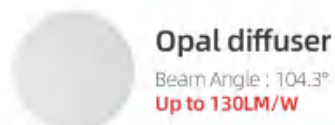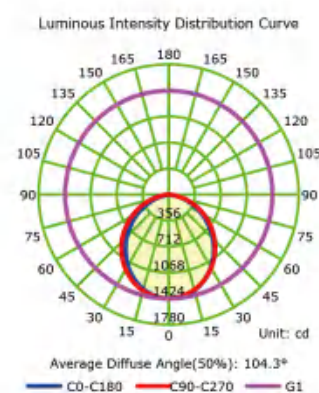




Item No.	Power(w)	Lumen efficiency(lm/w±10%)	Size(AxBxCmm)	Q'ty/CTN
ESLL-IR30	30	100/120	1200x50x72.8	9PCS
ESLL-IR40	40	100/120	1500x50x72.8	9PCS



Zeus




Zeus Led linear light has ABS reflector-cup-options in silver, black and white, together with Aluminum Housing, powered by CE drivers, high to ERP CLASS C. She has many different unluminaire & luminaire connector as Straight and T, L, X shape.

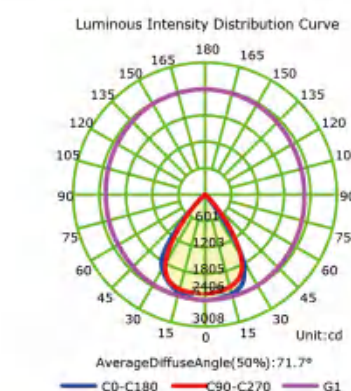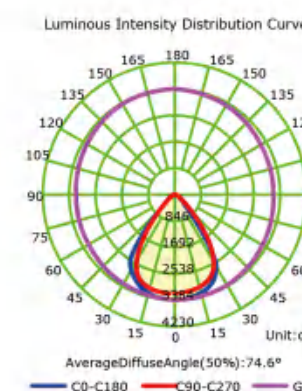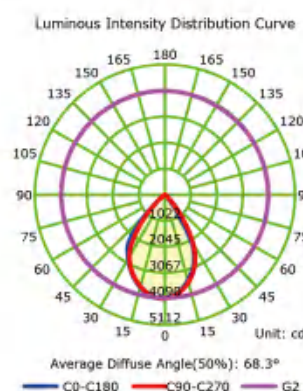

Item No.	Power(w)	Lumen efficiency(lm/w±10%)	Size(AxBxCmm)	Q'ty/CTN
ESLL-ZU15	15	100/120	577x50x72.8	9PCS
ESLL-ZU30	30	100/120	1147x50x72.8	9PCS
ESLL-ZU38	38	100/120	1432x50x72.8	9PCS
ESLL-ZU45	45	100/120	1717x50x72.8	4PCS
ESLL-ZU60	60	100/120	2287x50x72.8	4PCS
ESLL-ZU75	75	100/120	2857x50x72.8	4PCS




Donar

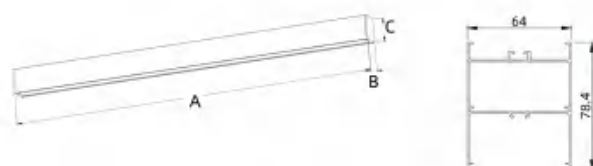

Donar Led linear light has PC opal and Prismatic diffuser, together with Aluminum Housing, powered by CE drivers to have a economical lighting solution for commercial areas.



Luminous Intensity Distribution Curve

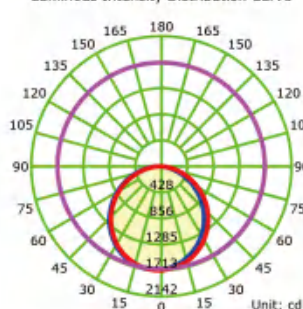


Average Diffuse Angle(50%): 110.2°
— C0-C180 — C90-C270 — G3



Opal diffuser

Beam Angle : 110.2°
Up to 140LM/W

Luminous Intensity Distribution Curve

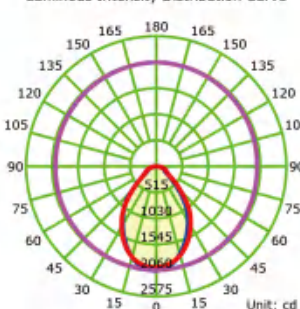

Average Diffuse Angle(50%): 75.7°
— C0-C180 — C90-C270 — G1




Prismatic diffuser

Beam Angle : 75.7°
Up to 130LM/W

Item No.	Power(w)	Lumen efficiency(lm/w±10%)	Size(AxBxCmm)	Q'ty/CTN
ESLL-DN20	20	100/120	600x64x78.4	9PCS
ESLL-DN30	30	100/120	1200x64x78.4	9PCS
ESLL-DN40	40	100/120	1500x64x78.4	9PCS




Muses

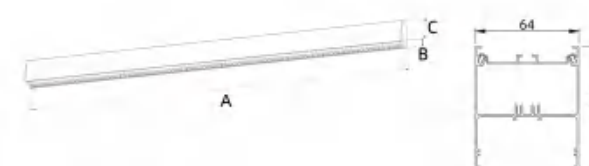

Muses Led linear light is made by high pressure extruded aluminum construction, die-cast aluminum end caps with no visible screws, PC grille anti-glare cover.



Luminous Intensity Distribution Curve

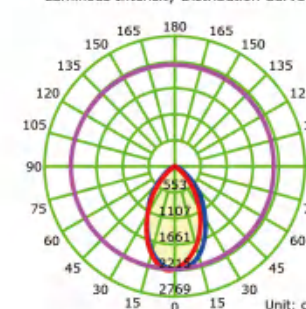


Average Diffuse Angle(50%): 62.7°
— C0-C180 — C90-C270 — G4



Black grille cover

Beam Angle : 62.7°
Up to 70LM/W

Luminous Intensity Distribution Curve

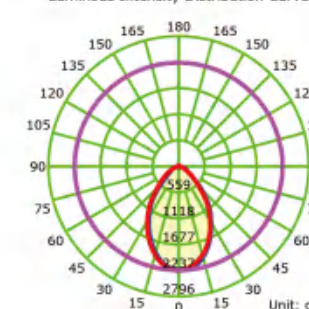


Average Diffuse Angle(50%): 70.1°
— C0-C180 — C90-C270 — G1



Silver grille cover

Beam Angle : 70.1°
Up to 70LM/W

Item No.	Power(w)	Lumen efficiency(lm/w±10%)	Size(AxBxCmm)	Q'ty/CTN
ESLL-MU30	30	70	1200x64x78.4	9PCS

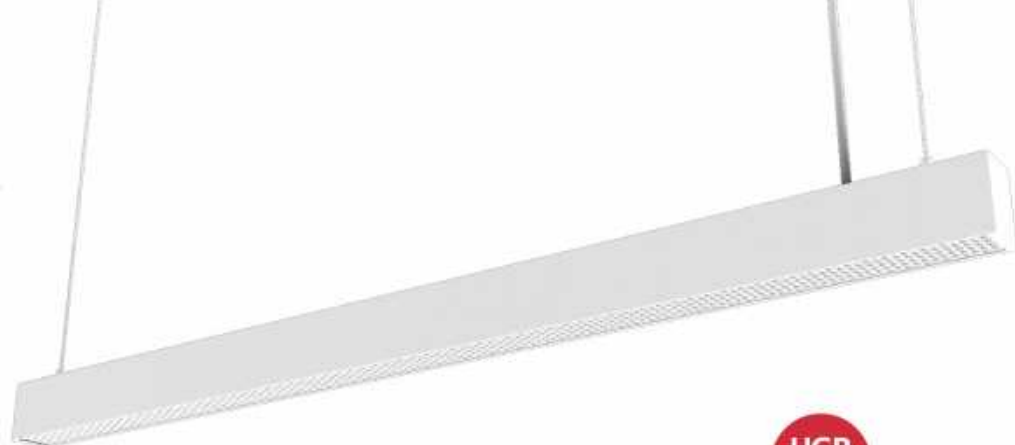


Honeybee



Honeybee Led linear light is made by PC honeycomb anti-glare cover, having a unique appearance.



Luminous Intensity Distribution Curve

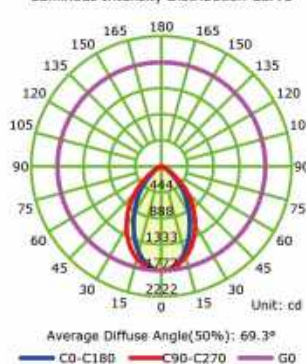


Honeybee cover

Beam Angle : 69.3°
Up to 70LM/W

Item No.	Power(w)	Lumen efficiency(lm/w±10%)	Size(AxBxCmm)	Q'ty/CTN
ESLL-HB30	30	70	1200x64x78.4	9PCS




Hera

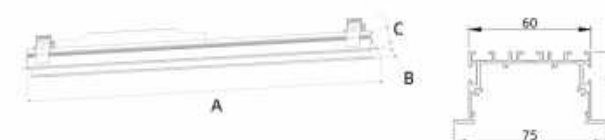

Hera is a recessed linear light with special flying edge and spring clips. It can be made in many flexible connection installation, having PC opal and Microprism diffuser, together with Aluminum Housing, powered by CE drivers on the back, to have a economical lighting solution for commercial areas.




Luminous Intensity Distribution Curve

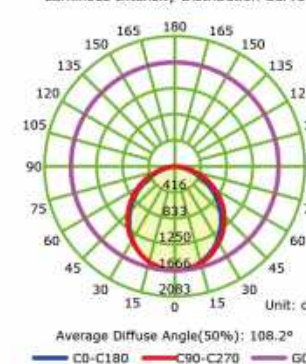

Opal diffuser

Beam Angle : 108.2°
Up to 130LM/W


Luminous Intensity Distribution Curve

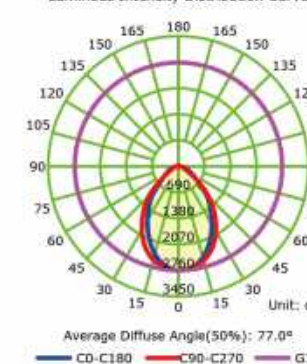


Prismatic diffuser

Beam Angle : 77°
Up to 120LM/W

Item No.	Power(w)	Lumen efficiency(lm/w±10%)	Size(AxBxCmm)	Hole size(mm)	Q'ty/CTN
ESLL-HR20	20	100/120	610x75x35	600x60x35	9PCS
ESLL-HR30	30	100/120	1215x75x35	1200x60x35	9PCS
ESLL-HR40	40	100/120	1515x75x35	1500x60x35	9PCS

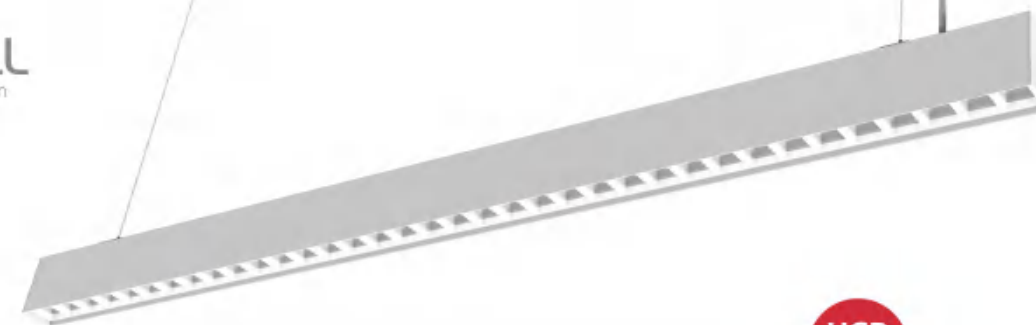


Rosey

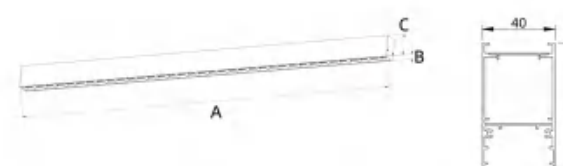

Rosey is independent linear light, reducing the width of the lamp body by nearly 20% from 5070 normal option. It is a simple and efficient luminaire.



Luminous Intensity Distribution Curve

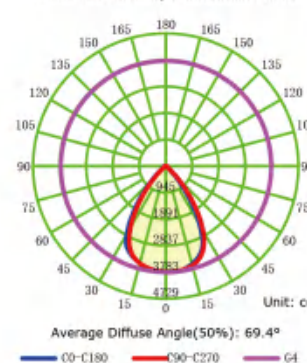


Transparent
reflector-cup
Beam Angle : 69.4°
Up to 120LM/W

Item No.	Power(w)	Lumen efficiency(lm/w±10%)	Size(AxBxCmm)	Q'ty/CTN
ESLL-RO30	30	100	1200x40x70	9PCS
ESLL-RO40	40	100	1500x40x70	9PCS




Apollo

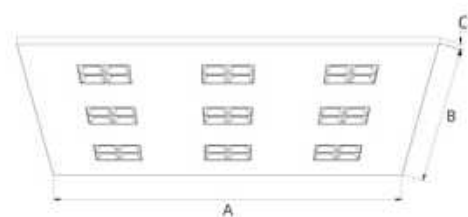

Apollo panel light with SMD2835 LED, UGR<13 PC reflector cup, SPCC back plate, 5 years flicker free driver, modules can be easily replaced to meet energy-saving.



Luminous Intensity Distribution Curve

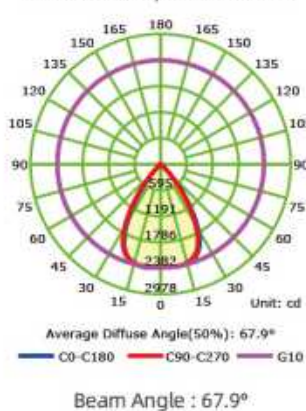

Item No.	Power(w)	Lumen efficiency(lm/w±10%)	Size(AxBxCmm)	Q'ty/CTN
ESUP-AP30	30	120/140	595X595X34	5PCS
ESUP-AP30	30	120/140	295X1195X34	5PCS




Rhea



Rhea panel light use PC lens and PC reflector cup to make bigger beam angle 85°, UGR<16, can be used in office site and some public site, with SPCC material back plate, which have good strength, modules can be replaceable to save energy.




Luminous Intensity Distribution Curve

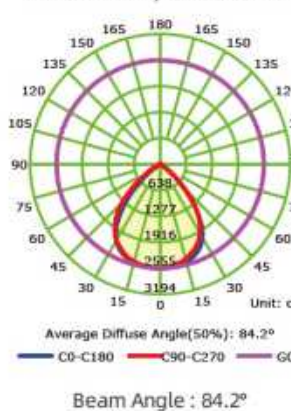

Item No.	Power(w)	Lumen efficiency(lm/w±10%)	Size(AxBxCmm)	Q'ty/CTN
ESUP-RH30	30	120/140	595X595X37	5PCS
ESUP-RH30	30	120/140	295X1195X37	5PCS
ESUP-RH30	30	120/140	620X620X37	5PCS


Eos

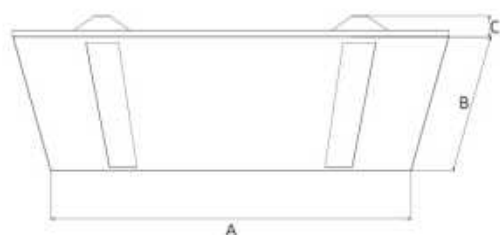

EOS panel light with special size prismatic or opal diffuser and different from normal panel lights,improving the competitiveness of this product.




Luminous Intensity Distribution Curve

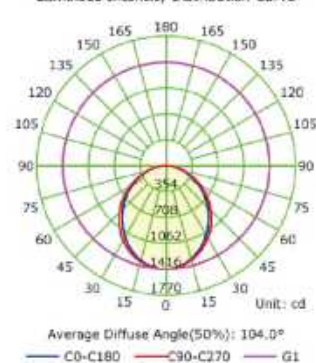

Beam Angle : 104°

Item No.	Power(w)	Lumen efficiency(lm/w±10%)	Size(AxBxCmm)	Q'ty/CTN
ESUP-EO30	30	110	595X595X29	5PCS
ESUP-EO30	30	110	620x620x29	5PCS


Polo

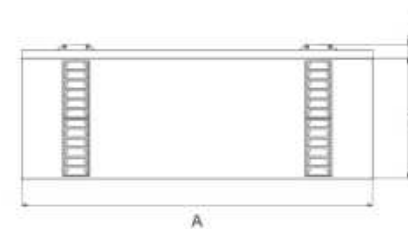

Polo panel light with SMD2835 LED, ABS reflector cup, SPCC material back plate, with flicker free driver, The reflector cup design make lighting comfortable.



Luminous Intensity Distribution Curve

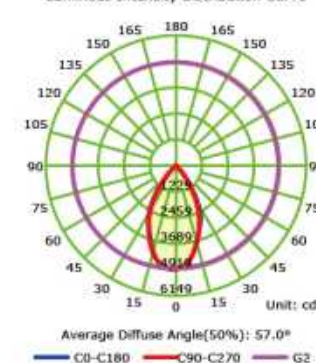


Beam Angle : 57°

Item No.	Power(w)	Lumen efficiency(lm/w±10%)	Size(AxBxCmm)	Q'ty/CTN
ESUP-PO30	30	120/140	595X595X28	5PCS
ESUP-PO30	30	120/140	620X620X28	5PCS
ESUP-PO30	30	120/140	295X1195X28	5PCS

UGR
<16


luminous
flux
140lm/w

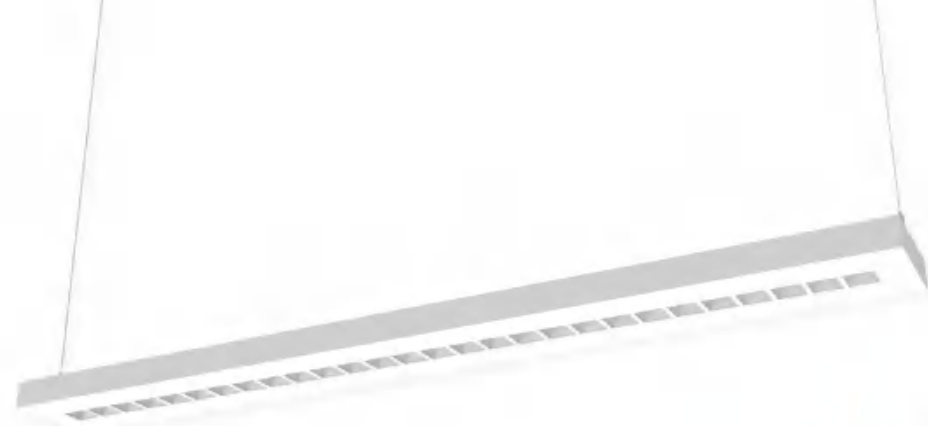


UGR
<19

luminous
flux
140lm/w


Afia

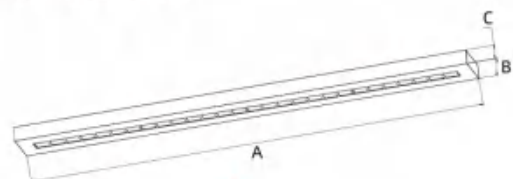

Afia panel light with 80° beam angle, UGR<16, it always be used in school, with PC reflector cup and PC lens make light more comfortable, it can support surface mounted directly, no need match to other surface mounted bracket.

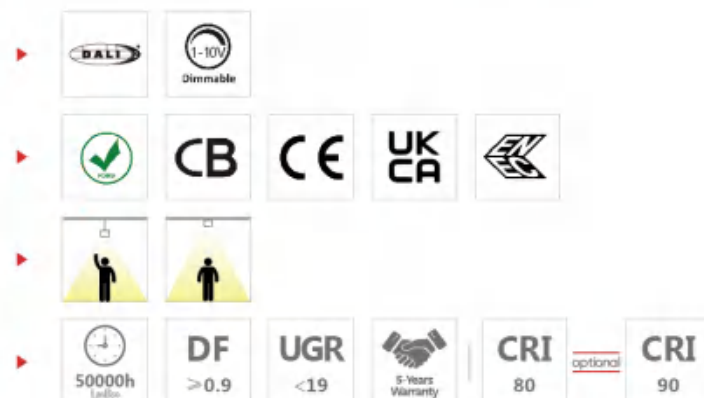

Luminous Intensity Distribution Curve

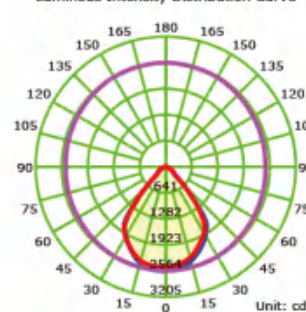


Average Diffuse Angle(50%): 78.8°
C0-C180 C90-C270 G2

Direct

Beam Angle : 78.8°

Luminous Intensity Distribution Curve

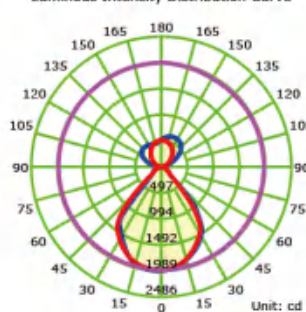

Average Diffuse Angle(50%): 80.5°
C0-C180 C90-C270 G3

Direct and Indirect

Beam Angle : 80.5°

Item No.	Power(w)	Lumen efficiency(lm/w±10%)	Size(AxBxCmm)	Q'ty/CTN
ESUP-AF30	30	120/140	1220X136X38	4PCS
ESUP-AF45	45	120/140	1505X136X38	4PCS




UGR
<19

luminous
flux
140lm/w


Replacement
module

Polar

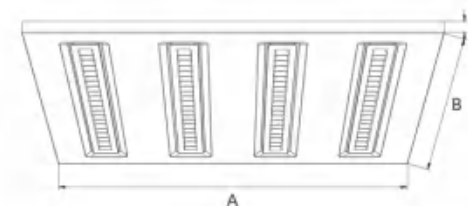

Polar panel light can make some special size, specially used to replace the traditional old project grille light, it also can support customer make different size to match different cut size ceiling.

Luminous Intensity Distribution Curve

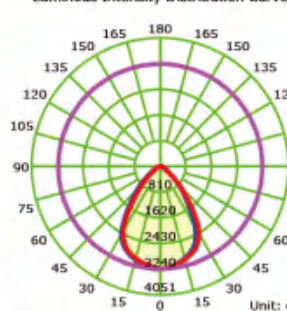

Average Diffuse Angle(50%): 73.6°
C0-C180 C90-C270 G1

Beam Angle : 73.6°

Item No.	Power(w)	Lumen efficiency(lm/w±10%)	Size(AxBxCmm)	Q'ty/CTN	Q'ty/Moudel
ESUP-PA30	30	120/140	595X595X18	5PCS	2
ESUP-PA45	45	120/140	595X595X18	5PCS	4
ESUP-PA30	30	120/140	295X1195X18	5PCS	2
ESUP-PA45	45	120/140	295X1195X18	5PCS	4
ESUP-PA60	60	120/140	595X1195X18	5PCS	4



Polar T5&T8 replacement solution



Polar panel light with SPCC housing + ABS mouldel, it is a perfect replacement for traditonal 3*24WT5 and 3*18W T8 fluorescent louver luminaries and sidelit LED panel light.





Item No.	Power(w)	Lumen efficiency(lm/w±10%)	Size(AxBxCmm)	Q' ty/CTN	Q' ty/Moudel
ESUP-PA30	30/40	120/140	670X670X18	5PCS	2/4
ESUP-PA30	30/40	120/140	150X1300X18	5PCS	2/4
ESUP-PA30	30/40	120/140	150X1500X18	5PCS	2/4
ESUP-PA30	30/40	120/140	150X1800X18	5PCS	2/4
ESUP-PA30	30/40	120/140	200X1300X18	5PCS	2/4
ESUP-PA30	30/40	120/140	300X1500X18	5PCS	2/4
ESUP-PA30	30/40	120/140	300X1800X18	5PCS	2/4

Helios



Helios backlit panel light with PIR sensor and Daylight harvest sensor, can automatically adjust its own lumen output through the sensor. The sensor function can set by remote controller according to the user application.

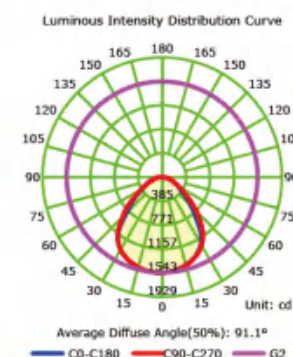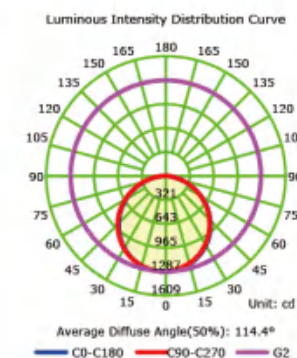

Light OFF when ambient brightness becomes higher than the preset lux level.

Item No.	Power(w)	Lumen efficiency(lm/w±10%)	Size(AxBxCmm)	Q' ty/CTN	UGR
ESBP-HE30	30/40	120/140	595X595X34	6PCS	<22/<19


The sensor setting
by remote controller

Microwave
Sensor


Pan



Pan backlit panel with an active motion detector, it emits high-frequency electro-magnetic wave 5.8GHz and receives their echo. The sensor detects the change in echo from even the slightest movement in its detection zone. A microprocessor then triggers the "switch light ON" command. Detection is possible through doors, panes of glass or thin walls.

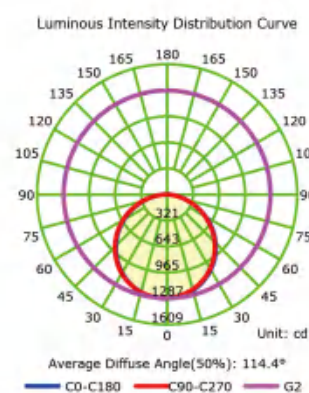

Opal diffuser
Beam Angle : 114.4°

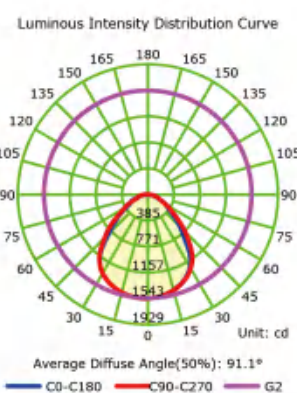

Prismatic diffuser
Beam Angle : 91.1°



检测到运动后，感应器自动亮灯。
The sensor turns light ON when motion gets detected.



感应器检测到运动后，自动进入延时时间。
The sensor keeps light ON for hold time period after motion leaves.




延时时间后自动关灯。
The sensor turns OFF light automatically after the hold time.

Item No.	Power(w)	Lumen efficiency(lm/w±10%)	Size(AxBxCmm)	Q'ty/CTN	UGR
ESBP-PN30	30/40	120/140	595X595X28	6PCS	<22/<19





IP65


Palaemon

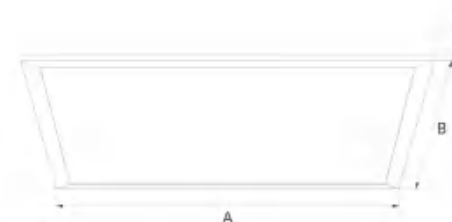

Palaemon is a waterproof backlit panel light, with IP65 driver, apply in some damp site, such as hospital, food factory, swimming pool, public kitchen.

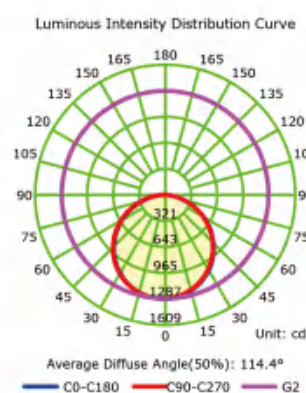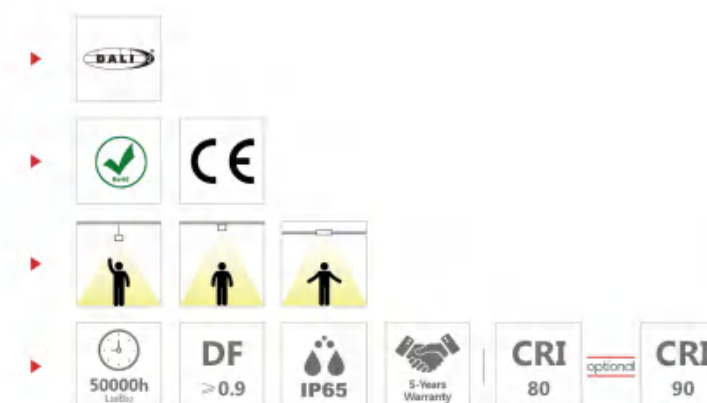

Opal diffuser
Beam Angle : 114.4°

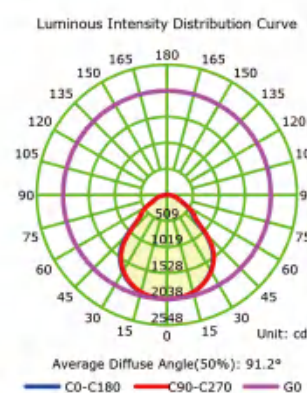

Prismatic diffuser
Beam Angle : 91.2°

Item No.	Power(w)	Lumen efficiency(lm/w±10%)	Size(AxBxCmm)	Q'ty/CTN	UGR
ESPM-NE30	30/40	100/120	595X595X34	5PCS	<22/<19
ESPM-NE30	30/40	100/120	620X620X34	5PCS	<22/<19
ESPM-NE30	30/40	100/120	295X1195X34	5PCS	<22/<19



Hebe

IP65


Clear room



Hebe is a waterproof sidelit panel light, it already passed TUV professional IP65 test, with IP65 driver, apply in some damp site, such as hospital, food factory, swimming pool, public kitchen, this type panel can install in cement material ceiling make surface mounted directly. Easy surface-mounted installation with screw holes.



Luminous Intensity Distribution Curve

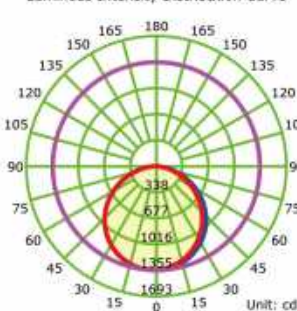

Average Diffuse Angle(50%): 113.2°


Unit: cd

— C0-C180 — C90-C270 — G1

Opal diffuser

Beam Angle : 113.2°

Luminous Intensity Distribution Curve

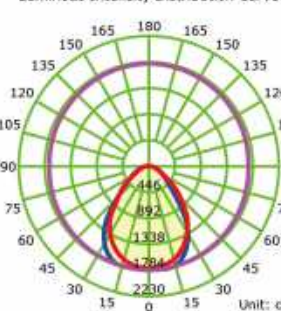

Average Diffuse Angle(50%): 82.0°

Unit: cd


— C0-C180 — C90-C270 — G10

Prismatic diffuser

Beam Angle : 82°

Item No.	Power(w)	Lumen efficiency(lm/w±10%)	Size(AxBxCmm)	Q'ty/CTN	UGR
ESPM-HE30	30	100/120	595X595X12	5PCS	<22/<19
ESPM-HE30	30	100/120	620X620X12	5PCS	<22/<19
ESPM-HE30	30	100/120	295X1195X12	5PCS	<22/<19


Doris

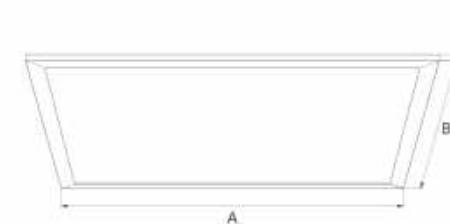

Doris is normal backlit panel light, 5 years warranty, flicker free driver, UGR<22 & UGR<19 Optional.



Luminous Intensity Distribution Curve

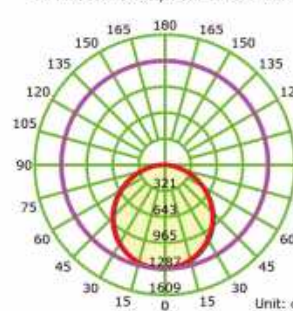

Average Diffuse Angle(50%): 114.4°


Unit: cd

— C0-C180 — C90-C270 — G2

Opal diffuser

Beam Angle : 114.4°

Luminous Intensity Distribution Curve

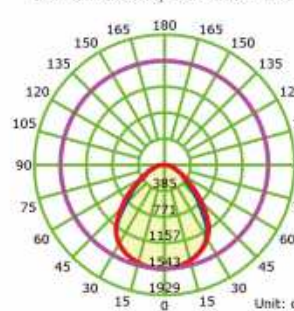

Average Diffuse Angle(50%): 91.1°

Unit: cd


— C0-C180 — C90-C270 — G2

Prismatic diffuser


Beam Angle : 91.1°

Item No.	Power(w)	Lumen efficiency(lm/w±10%)	Size(AxBxCmm)	Q'ty/CTN	UGR
ESBP-DO30	30/40	120/140	595X595X28	6PCS	<22/<19
ESBP-DO30	30/40	120/140	620X620X28	6PCS	<22/<19
ESBP-DO30	30/40	120/140	295X1195X28	6PCS	<22/<19

Gaea

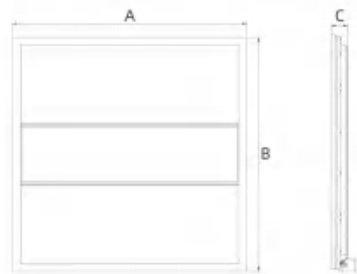

Gaea is a backlit design panel, it adopts anti-glare prismatic diffuser to meet UGR<19, make the light more comfortable, with 5 years warranty flicker free driver.

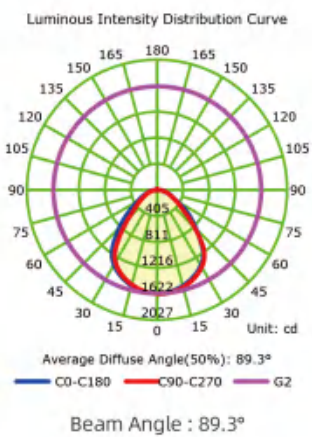





UGR
<19



Themis



Themis is a side-emitting panel light that can meet dimmable by itself automatically according to the intensity of the ambient light, better to meet energy-saving. It's sensor system combined with driver, user can adjust the target brightness of the area around ambient light sensor through adjust driver dip switch when installation.

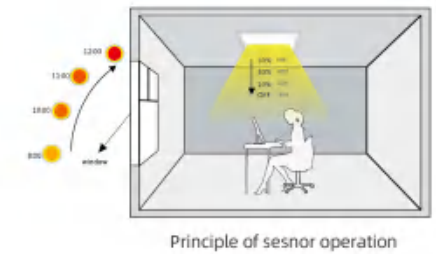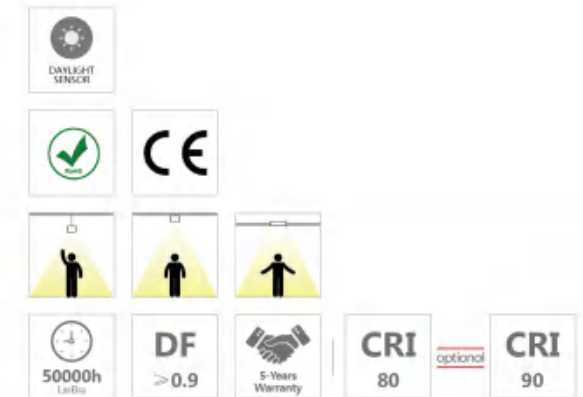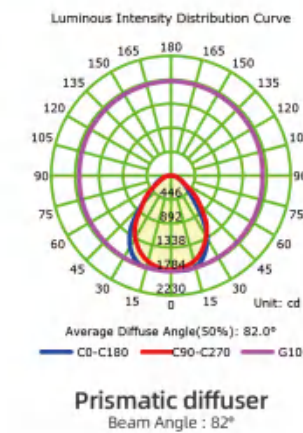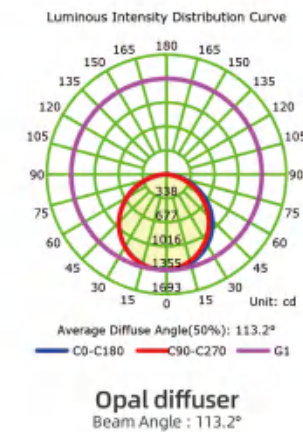

Output	Target Brightness	1	2	3	4
250mA	Level 1(Min.)	ON	ON	ON	ON
300mA	Level 2	ON	ON	ON	ON
350mA	Level 3	ON	ON	ON	ON
400mA	Level 4	ON	ON	ON	ON
450mA	Level 5	ON	ON	ON	ON
500mA	Level 6	ON	ON	ON	ON
550mA	Level 7	ON	ON	ON	ON
600mA	Level 8	ON	ON	ON	ON
650mA	Level 9	ON	ON	ON	ON
700mA	Level 10(Max.)	ON	ON	ON	ON

Item No.	Power(w)	Lumen efficiency(lm/w±10%)	Size(AxBxCmm)	Q'ty/CTN
ESBP-GA30	30/40	120/140	595X595X43	6PCS
ESBP-GA30	30/40	120/140	620X620X43	6PCS
ESBP-GA30	30/40	120/140	295X1195X43	6PCS

Item No.	Power(w)	Lumen efficiency(lm/w±10%)	Size(AxBxCmm)	Q'ty/CTN	UGR
ESSP-TH30	30	100/120	595X595X9	5PCS	<22/<19
ESSP-TH30	30	100/120	620X620X9	5PCS	<22/<19
ESSP-TH30	30	100/120	295X1195X9	5PCS	<22/<19


Nereus




Nereus is a waterproof sidelit panel light, it already passed TUV professional IP65 test, with IP65 driver, apply in some damp site, such as hospital, food factory, swimming pool, public kitchen.

IP65

UGR
<19

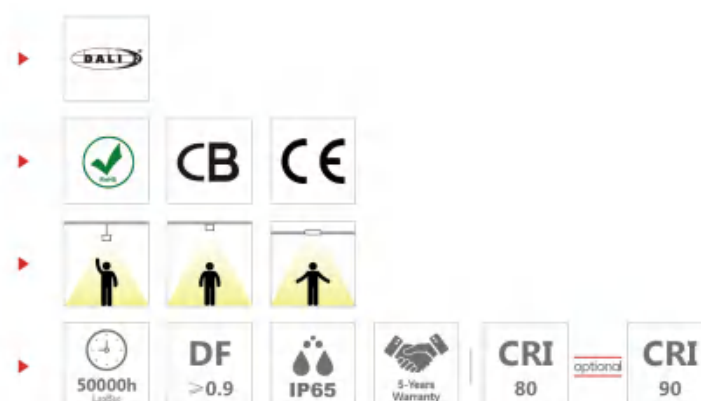


Luminous Intensity Distribution Curve

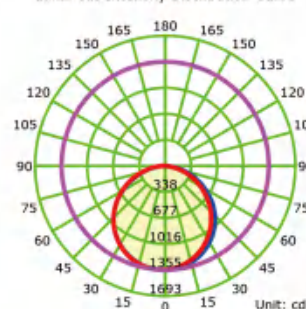

Opal diffuser
Beam Angle : 113.2°

Luminous Intensity Distribution Curve



Prismatic diffuser
Beam Angle : 82°

Item No.	Power(w)	Lumen efficiency(lm/w±10%)	Size(AxBxCmm)	Q'ty/CTN	UGR
ESSP-NE30	30	100/120	595X595X11.5	5PCS	<22/<19
ESSP-NE30	30	100/120	620X620X11.5	5PCS	<22/<19
ESSP-NE30	30	100/120	295X1195X11.5	5PCS	<22/<19

Aglaia




Aglaia is a side-emitting panel light, with PMMA LGP anti-yellow, opal or prismatic diffuser options, 5years warranty. It is popular used in grill ceiling in office, can support recessed/suspension/surface mounted installation ways.

Anti-yellow




Luminous Intensity Distribution Curve

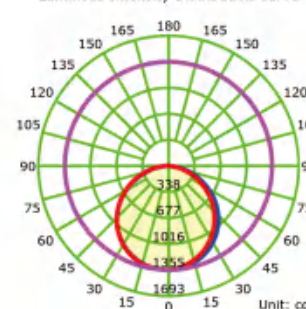

Opal diffuser
Beam Angle : 113.2°


Luminous Intensity Distribution Curve

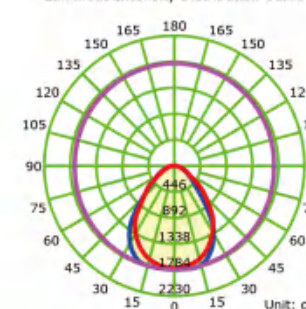

Prismatic diffuser
Beam Angle : 82°

Item No.	Power(w)	Lumen efficiency(lm/w±10%)	Size(AxBxCmm)	Q'ty/CTN	UGR
ESSP-AG30	30	100/120	595X595X9	5PCS	<22/<19
ESSP-AG30	30	100/120	620X620X9	5PCS	<22/<19
ESSP-AG30	30	100/120	295X1195X9	5PCS	<22/<19

MOUNTING ACCESSORIES

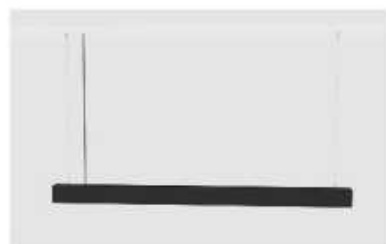

Suspending

Suspend Mounting-A



Part of hanging wire x2



Hanging wire x2



Part of hanging wire x2



Self-tapping screw x2



Plastic dowel x2



Suspend Mounting-B



Part of hanging wire x2



Hanging wire x2



Part of hanging wire x2



Self-tapping screw x2



Plastic dowel x2



Deep recessed Mounting



Fixed part x2



Spring x2



Screw arbor x2



Butterfly screw x2



Surface Mounting



Spring x2



Mounting bracket x2



Self-tapping screw x2



Plastic dowel x2



Surface Mounted



Wall Mounting



Blind nut x2



Fixing screws x2



Fixed part x2



Self-tapping screw x2



Plastic dowel x2



Canopy Suspension Wire



Suspension wire x1




Suspension wire x1



Self-tapping screw x4



Plastic dowel x4

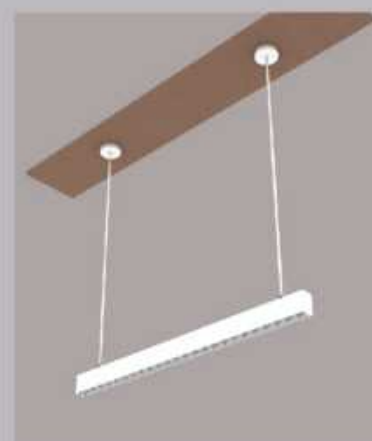

Hanger Rod Mounting



Hanging rod x2



Blind nut x2



Screws x4



Metal frame x2



Self-tapping screw x2



Round part x2



Plastic dowel x2



Surface mounted frame



ES-05MZX
610x610x44mm
• Strong frame with iron spring connector



ES-07MZX
610x610x45mm
• Simply frame with iron spring connector



ES-W01MZX
600x600x43mm
• Cost-effective frame with plastic connector



ES-W02MZX
600x600x63mm
• Cost-effective frame with plastic connector



ES-W05MZX
600x600x70mm
• Cost-effective frame with plastic connector



ES-W06QZX
633x633x34mm
• Recessed embedded mounted frame with clips

Suspension kits



Recessed installation clips



GST connector



GST1B-3P(CC)



GST1B-4P(CC)



GST1B-5P(CC)



2P wire connector



3P wire connector



4P wire connector



5P wire connector