



MF Smart Kylin Ltd

Panel Light

Hot selling , super slim, with smooth light and color.
And could be dimmerable or CCT function.



MF370295



尺寸DIAMETER 流明LUMEN 功率POWER 角度BEAMANGLE

Φ230*25mm 1620lm 18W 120°

Φ300*25mm 2160lm 24W 120°

Φ400*27mm 2700lm 30W 120°

Φ500*27mm 3600lm 40W 120°

Φ600*27mm 4500lm 50W 120°

Φ750*27mm 6300lm 70W 120°

CHARACTERISTIC

Innovative optical design, smooth light spot,
RA ≥ 90;
A variety of optical accessories to achieve
accurate control of spot effect;

MF370295-1



尺寸DIAMETER 流明LUMEN 功率POWER 角度BEAMANGLE

Φ230*25mm 1620lm 18W 120°

Φ300*25mm 2160lm 24W 120°

Φ400*27mm 2700lm 30W 120°

Φ500*27mm 3600lm 40W 120°

Φ600*27mm 4500lm 50W 120°

Φ750*27mm 6300lm 70W 120°

CHARACTERISTIC

Innovative optical design, smooth light spot,
RA ≥ 90;
A variety of optical accessories to achieve
accurate control of spot effect;

LED DOWNLIGHT

LED DOWNLIGHT





Ring could do white, black, grey, gold etc color







MF400065

FIRENZE



尺寸 DIMENSION	流明 LUMEN	功率 POWER	角度 BEAM ANGLE
600*600mm	1500lm	15W	100°

特点 (CHARACTERISTIC)

光斑均匀无阴影;

Smooth spot without double shadow;

高显指LED, 平均显指Ra>90, Re>85;

LED with rounded light spot and high display finger without glint, the average display finger Ra>90, Re>85;

颜色 (COLOUR)



砂白
SW

光照效果 (ILLUMINATION EFFECT)



光照图
Illumination pattern

效果展示 (RESULTS SHOW)



照墙效果
Wall effect display





MF400066 YOSEMITE



尺寸 DIMENSIC	通明 LUMEN	功率 POWER	角度 BEAMANGLE
1000*200mm	1200lm	12W	100°

特点 (CHARACTERISTIC)

光斑圆滑无重影;

Smooth spot without double shadow;

高显指LED, 平均显指Ra>90, Re>85;

LED with rounded light spot and high display finger without glint, the average display finger Ra>90, Re>85;

颜色 (COLOUR)



砂白

SW

光照效果 (ILLUMINATION EFFECT)



光斑图

Illumination pattern

效果展示 (RESULTS SHOW)




照墙效果

Wall effect display

140LM/W

LED Replacement

Driver Replacement

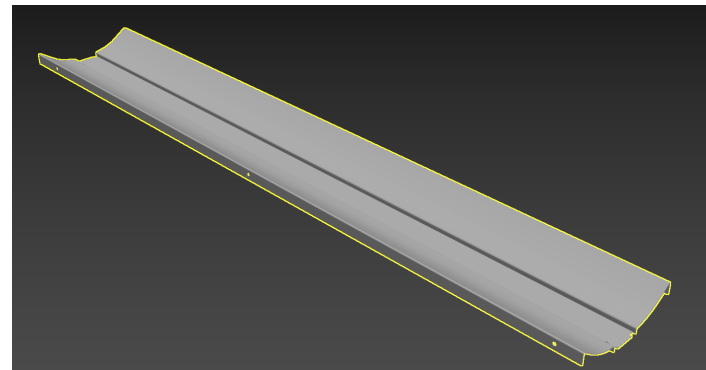




MF400067



尺寸DIAMETER	流明LUMEN	功率POWER	角度BEAMANGLE
595*595mm	5000lm	40W	100°



特点 (CHARACTERISTIC)

颜色 (COLOUR)

创新光学设计, 光斑圆润, 显指 ≥ 90 ;
Innovative optical design, smooth light spot
, $RA \geq 90$;
多种光学配件, 实现光斑效果精准控制;
A variety of optical accessories to achieve
accurate control of spot effect;


白色 white

黑色 black

MF400068



尺寸DIAMETER	流明LUMEN	功率POWER	角度BEAMANGLE
295*1195mm	5000lm	40W	100°



特点 (CHARACTERISTIC)

颜色 (COLOUR)

创新光学设计, 光斑圆润, 显指 ≥ 90 ;
Innovative optical design, smooth light spot
, $RA \geq 90$;
多种光学配件, 实现光斑效果精准控制;
A variety of optical accessories to achieve
accurate control of spot effect;

白色 white




MF400069



尺寸DIAMETER	流明LUMEN	功率POWER	角度BEAMANGLE
595*595mm	6000lm	48W	100°

595mm



595mm

特点 (CHARACTERISTIC)

颜色 (COLOUR)

创新光学设计, 光斑圆润, 显指 ≥ 90 ;
Innovative optical design, smooth light spot
, RA ≥ 90 ;
多种光学配件, 实现光斑效果精准控制;
A variety of optical accessories to achieve
accurate control of spot effect;


白色 white

MF400070



尺寸DIAMETER	流明LUMEN	功率POWER	角度BEAMANGLE
595*595mm	5000lm	40W	100°

595mm



595mm

特点 (CHARACTERISTIC)

颜色 (COLOUR)

创新光学设计, 光斑圆润, 显指 ≥ 90 ;
Innovative optical design, smooth light spot
, RA ≥ 90 ;
多种光学配件, 实现光斑效果精准控制;
A variety of optical accessories to achieve
accurate control of spot effect;

白色 white

Trimless , New item



MF400071



尺寸DIAMETER	流明LUMEN	功率POWER	角度BEAMANGLE
595*595mm	500lm	40W	100°

595mm



特点 (CHARACTERISTIC)

颜色 (COLOUR)

创新光学设计, 光斑圆润, 显指 ≥ 90 ;
Innovative optical design, smooth light spot
, RA ≥ 90 ;
多种光学配件, 实现光斑效果精准控制;
A variety of optical accessories to achieve
accurate control of spot effect;

白色 white

MF400072



尺寸DIAMETER	流明LUMEN	功率POWER	角度BEAMANGLE
300*1200mm	5000lm	40W	100°

1200mm



特点 (CHARACTERISTIC)

颜色 (COLOUR)

创新光学设计, 光斑圆润, 显指 ≥ 90 ;
Innovative optical design, smooth light spot
, RA ≥ 90 ;
多种光学配件, 实现光斑效果精准控制;
A variety of optical accessories to achieve
accurate control of spot effect;


白色 white



LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.44V I:0.1013A P:21.876W PF:0.9793 Freq:50.00Hz Lamp Flux:3922.76x1 lm		
NAME: panel 600X600	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 179.31 lm/W			
MODEL		Imax(cd)	1347	S/MH (C0/180)	1.26
NOMINAL POWER (W)		LOR(%)	100.0	S/MH (C90/270)	1.27
RATED VOLTAGE (V)	--	TOTAL FLUX(lm)	3922.8	η UP,DN (C0-180)	0.0,49.8
NOMINAL FLUX(lm)	3922.76	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.0,50.2
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	--	η down (%)	100.0	CIBSE SHR MAX	1.35

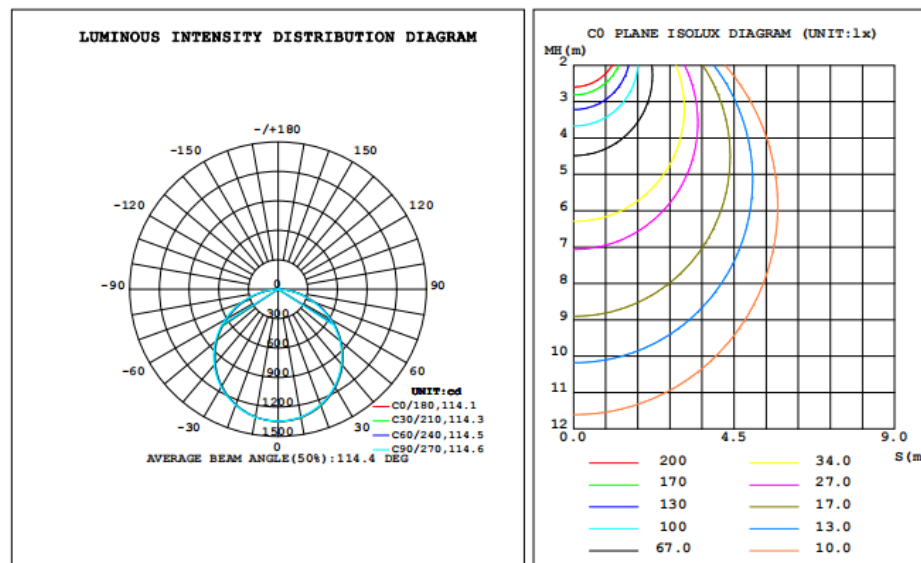

MF400071



尺寸DIAMETER	流明LUMEN	功率POWER	角度BEAMANGLE
595*595mm		40W	100°

179.37LM/W

LED : Replacement

Driver : Replacement



MF400073



尺寸DIAMETER	流明LUMEN	功率POWER	角度BEAMANGLE
595*595mm	5000lm	40W	100°

595mm



特点 (CHARACTERISTIC)

颜色 (COLOUR)

创新光学设计, 光斑圆润, 显指 ≥ 90 ;
Innovative optical design, smooth light spot
, RA ≥ 90 ;
多种光学配件, 实现光斑效果精准控制;
A variety of optical accessories to achieve
accurate control of spot effect;

白色 white

MF400074



尺寸DIAMETER	流明LUMEN	功率POWER	角度BEAMANGLE
300*1200mm	5000lm	40W	100°

1200mm



特点 (CHARACTERISTIC)


颜色 (COLOUR)

创新光学设计, 光斑圆润, 显指 ≥ 90 ;
Innovative optical design, smooth light spot
, RA ≥ 90 ;
多种光学配件, 实现光斑效果精准控制;
A variety of optical accessories to achieve
accurate control of spot effect;

白色 white



MF400076



尺寸DIAMETER	流明LUMEN	功率POWER	角度BEAMANGLE
595*595mm	5000lm	40W	100°


特点 (CHARACTERISTIC)

颜色 (COLOUR)

创新光学设计, 光斑圆润, 显指 ≥ 90 ;
Innovative optical design, smooth light spot
, RA ≥ 90 ;
多种光学配件, 实现光斑效果精准控制;
A variety of optical accessories to achieve
accurate control of spot effect;

白色 white

MF400077




尺寸DIAMETER	流明LUMEN	功率POWER	角度BEAMANGLE
------------	---------	---------	-------------

特点 (CHARACTERISTIC)

颜色 (COLOUR)


创新光学设计, 光斑圆润, 显指 ≥ 90 ;
Innovative optical design, smooth light spot
, RA ≥ 90 ;
多种光学配件, 实现光斑效果精准控制;
A variety of optical accessories to achieve
accurate control of spot effect;

白色 white

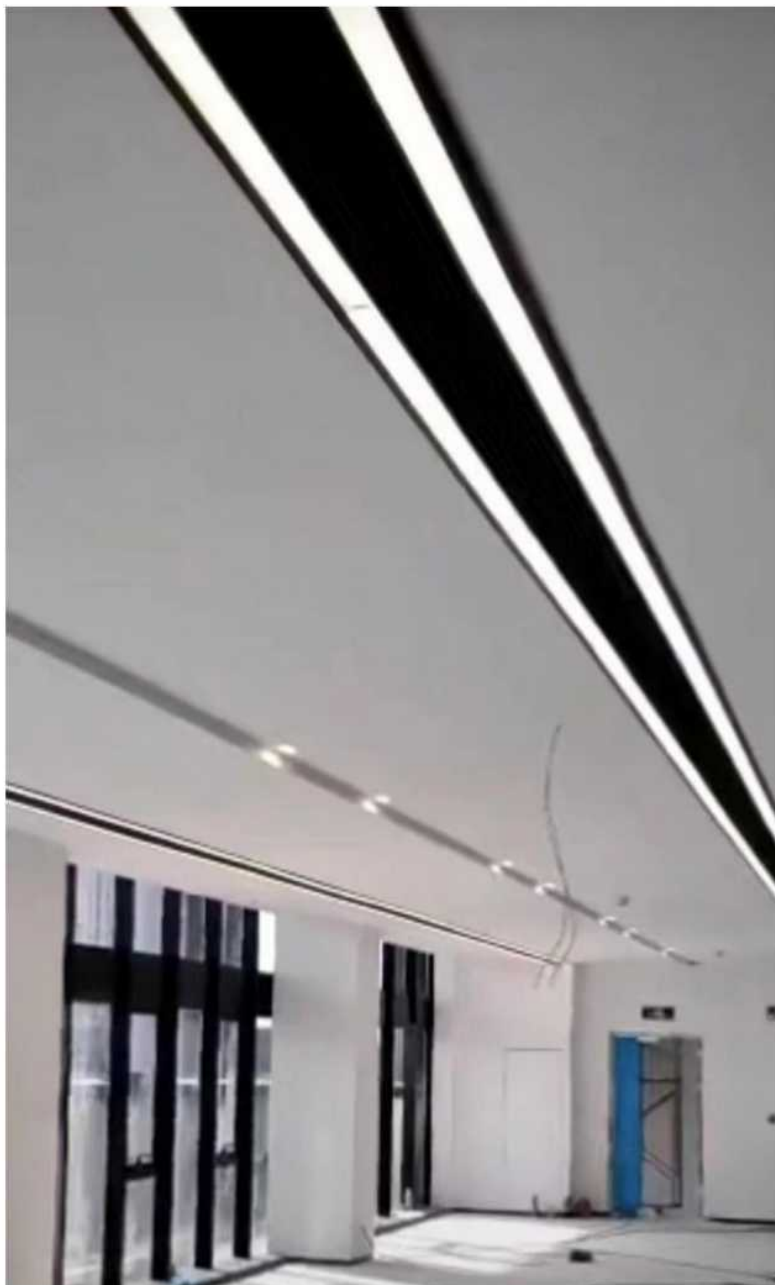

MF400075

PULIPSBURG



尺寸 DIMENSIC	流明 LUMEN	功率 POWER	角度 BEAMANGLE
1200*300mm	5800lm	58W	100°

特点 (CHARACTERISTIC)

创新光学设计，光斑均匀；

Innovative optical design, smooth light spot;

多种光学配件，实现光斑效果精准控制；

A variety of optical accessories to achieve accurate control of spot effect;

颜色 (COLOUR)

砂白
SW

光照效果 (ILLUMINATION EFFECT)



光照图

illumination pattern





MF400076

PHILIPS



尺寸 DIMENSION	流明 LUMEN	功率 POWER	角度 BEAM ANGLE
600*600mm	5800lm	58W	100°

特点 (CHARACTERISTIC)

创新的 optics 设计，光斑均匀；
Innovative optical design, smooth light spot;
多种光学配件，实现光斑效果精准控制；
A variety of optical accessories to achieve accurate control of spot effect;

颜色 (COLOUR)



砂白
SW

光照效果 (ILLUMINATION EFFECT)



光斑图
Illumination pattern





MF050524 WEIMAR



尺寸 DIMENSIC	流明 LUMEN	功率 POWER	角度 BEAMANGLE
300*300mm	1500lm	15W	100°
400*400mm	2400lm	24W	100°
500*500mm	3600lm	36W	100°
600*600mm	4000lm	40W	100°

特点 (CHARACTERISTIC)

创新光学设计，光斑均匀；
Innovative optical design, smooth light spot;
多种光学配件，实现光斑效果精准控制；
A variety of optical accessories to achieve accurate control of spot effect;

颜色 (COLOUR)



光照效果 (ILLUMINATION EFFECT)



光斑图
Illumination pattern

效果展示 (RESULTS SHOW)



照墙效果
Wall effect display

MF050525 WEIMAR-A



尺寸 DIMENSIC	流明 LUMEN	功率 POWER	角度 BEAMANGLE
300*300mm	1500lm	15W	100°
400*400mm	2400lm	24W	100°
500*500mm	3600lm	36W	100°
600*600mm	4000lm	40W	100°





适用商场、展馆、室内等场景

APPLICABLE TO SHOPPING MALLS, EXHIBITION HALLS, INDOOR AND OTHER SCENES



IP65 LED CEILING LIGHT



Motion Induction

特点 (CHARACTERISTIC)

创新光学设计，光斑均匀；

Innovative optical design, smooth light spot;

多种光学配件，实现光斑效果精准控制；

A variety of optical accessories to achieve accurate control of spot effect;

颜色 (COLOUR)

铝白
LW铝黑
LBK

光照效果 (ILLUMINATION EFFECT)

光斑图
Illumination pattern

效果展示 (RESULTS SHOW)

照墙效果
Wall effect display

适用商场、展馆、室内等场景

APPLICABLE TO SHOPPING MALLS, EXHIBITION HALLS, INDOOR AND OTHER SCENES



尺寸DIAMETER	流明LUMEN	功率POWER	角度BEAMANGLE
------------	---------	---------	-------------

特点 (CHARACTERISTIC)	颜色 (COLOUR)
---------------------	-------------

创新光学设计，光斑圆润，显指 ≥ 90 ；
Innovative optical design, smooth light spot
, RA ≥ 90 ；
多种光学配件，实现光斑效果精准控制；
A variety of optical accessories to achieve
accurate control of spot effect；

白色 white

黑色 black

尺寸DIAMETER	流明LUMEN	功率POWER	角度BEAMANGLE
------------	---------	---------	-------------

