



LED String Light series

- Rubber Wire String Light
- PVC Wire String Lightt
- 360° High Brightness Rubber Wire String Light
- RGB Color Changing Rubber Wire String Light
- Non-polarity Dual Color Rubber Wire String Light
- Rubber Wire Curtain Light
- Rubber Wire Icicle Light
- PVC Wire Curtain Light
- PVC Wire Icicle Light
- Rubber Wire Net Light
- Rubber Wire Firecracker Light
- Fairy Light
- RGB Fairy Light
- Fairy Icicle Light
- Accessory

Customized

Rubber Wire String Light
(Round Cap,Concave Cap)

Operating Voltage:
12V/ 24V/ 110-120V/ 220V-240V

Material:
0.5mm² Rubber wire with shrinkable tube

LED Colors Available:

Customized

2500K-10000K

RGB

R/G/Y/B/O/PK/PP


Flash Blubs

Wire Colors Available:

Customized

R/Y/G/O/G/B/W/W/BK

Flashing LED



Product Specification

CE RoHS

Item No.	Voltage	LED Colour	LED Qty	Flashing Type	Lenght	Power	Max. Connections	Wire Specification	Certification	IP
LED-DL-24V-30	24V	R/Y/O/G/B/W/WW/PK/P	30	4+1/9+1	4m	1.8W	7pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-24V-40	24V	R/Y/O/G/B/W/WW/PK/P	40	4+1/9+1	5m	1.8W	6pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-24V-50	24V	R/Y/O/G/B/W/WW/PK/P	50	4+1/9+1	5m	2.5W	6pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-24V-60	24V	R/Y/O/G/B/W/WW/PK/P	60	4+1/9+1	5m	3.6W	6pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-24V-80	24V	R/Y/O/G/B/W/WW/PK/P	80	4+1/9+1	10m	2.8W	5pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-24V-100	24V	R/Y/O/G/B/W/WW/PK/P	100	4+1/9+1	10m	5W	5pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-30	240V	R/Y/O/G/B/W/WW/PK/P	30	4+1/9+1	4m	3.6W	50pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-40	240V	R/Y/O/G/B/W/WW/PK/P	40	4+1/9+1	5m	3.6W	40pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-50	240V	R/Y/O/G/B/W/WW/PK/P	50	4+1/9+1	5m	3.6W	40pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-60	240V	R/Y/O/G/B/W/WW/PK/P	60	4+1/9+1	5m	3.6W	40pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-80	240V	R/Y/O/G/B/W/WW/PK/P	80	4+1/9+1	10m	7.2W	20pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-100	240V	R/Y/O/G/B/W/WW/PK/P	100	4+1/9+1	10m	7.2W	20pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-120	240V	R/Y/O/G/B/W/WW/PK/P	120	4+1/9+1	10m	7.2W	20pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-150	240V	R/Y/O/G/B/W/WW/PK/P	150	4+1/9+1	12m	10.8W	17pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-180	240V	R/Y/O/G/B/W/WW/PK/P	180	4+1/9+1	15m	10.8W	13pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-200	240V	R/Y/O/G/B/W/WW/PK/P	200	4+1/9+1	20m	14.4W	10pcs	1*0.5mm ² Rubber Wire	CE	IP67

* It can be customized on request.

Customized

PVC Wire String Light
(Round Cap,Concave Cap)



Operating Voltage:
12V/ 24V/ 110-120V/ 220V-240V

Material:
0.5mm² PVC wire with shrinkable tube

LED Colors Available:

Customized

2500K-10000K

RGB

R/G/Y/B/O/PP

Flash Blinds

Wire Colors Available:

Customized

R/Y/G/B/W/BK/T



Product Specification



Item No.	Voltage	LED Colour	LED Qty	Flashing Type	Lenght	Power	Max. Connections	Wire Specification	Certification	IP
LED-IL-24V-30	24V	R/Y/O/G/B/W/WW/PK/P	30	4+1/9+1	4m	1.8W	7pcs	1*0.5mm ² PVC Wire	CE	IP67
LED-IL-24V-40	24V	R/Y/O/G/B/W/WW/PK/P	40	4+1/9+1	5m	1.8W	6pcs	1*0.5mm ² PVC Wire	CE	IP67
LED-IL-24V-50	24V	R/Y/O/G/B/W/WW/PK/P	50	4+1/9+1	5m	2.5W	6pcs	1*0.5mm ² PVC Wire	CE	IP67
LED-IL-24V-60	24V	R/Y/O/G/B/W/WW/PK/P	60	4+1/9+1	5m	3.6W	6pcs	1*0.5mm ² PVC Wire	CE	IP67
LED-IL-24V-80	24V	R/Y/O/G/B/W/WW/PK/P	80	4+1/9+1	10m	2.8W	5pcs	1*0.5mm ² PVC Wire	CE	IP67
LED-IL-24V-100	24V	R/Y/O/G/B/W/WW/PK/P	100	4+1/9+1	10m	5W	5pcs	1*0.5mm ² PVC Wire	CE	IP67
LED-IL-110V-30	110V	R/Y/O/G/B/W/WW/PK/P	30	4+1/9+1	4m	1.6W	25pcs	1*0.5mm ² PVC Wire	ETL	IP67
LED-IL-110V-40	110V	R/Y/O/G/B/W/WW/PK/P	40	4+1/9+1	5m	3.2W	10pcs	1*0.5mm ² PVC Wire	ETL	IP67
LED-IL-110V-50	110V	R/Y/O/G/B/W/WW/PK/P	50	4+1/9+1	5m	3.2W	10pcs	1*0.5mm ² PVC Wire	ETL	IP67
LED-IL-110V-60	110V	R/Y/O/G/B/W/WW/PK/P	60	4+1/9+1	5m	3.2W	10pcs	1*0.5mm ² PVC Wire	ETL	IP67
LED-IL-110V-70	110V	R/Y/O/G/B/W/WW/PK/P	70	4+1/9+1	10m	3.2W	10pcs	1*0.5mm ² PVC Wire	ETL	IP67
LED-IL-110V-100	110V	R/Y/O/G/B/W/WW/PK/P	100	4+1/9+1	10m	6.6W	10pcs	1*0.5mm ² PVC Wire	ETL	IP67
LED-IL-240V-30	240V	R/Y/O/G/B/W/WW/PK/P	30	4+1/9+1	4m	3.6W	50pcs	1*0.5mm ² PVC Wire	CE	IP67
LED-IL-240V-40	240V	R/Y/O/G/B/W/WW/PK/P	40	4+1/9+1	5m	3.6W	40pcs	1*0.5mm ² PVC Wire	CE	IP67
LED-IL-240V-50	240V	R/Y/O/G/B/W/WW/PK/P	50	4+1/9+1	5m	3.6W	40pcs	1*0.5mm ² PVC Wire	CE	IP67
LED-IL-240V-60	240V	R/Y/O/G/B/W/WW/PK/P	60	4+1/9+1	5m	3.6W	40pcs	1*0.5mm ² PVC Wire	CE	IP67
LED-IL-240V-80	240V	R/Y/O/G/B/W/WW/PK/P	80	4+1/9+1	10m	7.2W	20pcs	1*0.5mm ² PVC Wire	CE	IP67
LED-IL-240V-100	240V	R/Y/O/G/B/W/WW/PK/P	100	4+1/9+1	10m	7.2W	20pcs	1*0.5mm ² PVC Wire	CE	IP67
LED-IL-240V-120	240V	R/Y/O/G/B/W/WW/PK/P	120	4+1/9+1	10m	7.2W	20pcs	1*0.5mm ² PVC Wire	CE	IP67
LED-IL-240V-150	240V	R/Y/O/G/B/W/WW/PK/P	150	4+1/9+1	12m	10.8W	17pcs	1*0.5mm ² PVC Wire	CE	IP67
LED-IL-240V-180	240V	R/Y/O/G/B/W/WW/PK/P	180	4+1/9+1	15m	10.8W	13pcs	1*0.5mm ² PVC Wire	CE	IP67
LED-IL-240V-200	240V	R/Y/O/G/B/W/WW/PK/P	200	4+1/9+1	20m	14.4W	10pcs	1*0.5mm ² PVC Wire	CE	IP67

* It can be customized on request.

Customized

360° High Brightness Rubber Wire String Light
(Round Cap,Concave Cap)



Operating Voltage:
12V/ 24V/ 110-120V/ 220V-240V

Material Available:
0.5mm² PVC wire with shrinkable tube
0.5mm² Rubber wire with shrinkable tube

LED Colors Available:

Customized

2500K-40000K

RGB


R/G/Y/B/O/P/PP

Flash Bullets

Wire Colors Available:

Customized

R/Y/G/O/G/B/W/BK



Product Specification

CE RoHS

Item No.	Voltage	LED Colour	LED Qty	Flashing Type	Lenght	Power	Max. Connections	Wire Specification	Certification	IP
LED-DL-24V-30	24V	R/Y/O/G/B/W/WW/PK/P	30	4+1/9+1	4m	1.8W	7pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-24V-40	24V	R/Y/O/G/B/W/WW/PK/P	40	4+1/9+1	5m	1.8W	6pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-24V-50	24V	R/Y/O/G/B/W/WW/PK/P	50	4+1/9+1	5m	2.5W	6pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-24V-60	24V	R/Y/O/G/B/W/WW/PK/P	60	4+1/9+1	5m	3.6W	6pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-24V-80	24V	R/Y/O/G/B/W/WW/PK/P	80	4+1/9+1	10m	2.8W	5pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-24V-100	24V	R/Y/O/G/B/W/WW/PK/P	100	4+1/9+1	10m	5W	5pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-30	240V	R/Y/O/G/B/W/WW/PK/P	30	4+1/9+1	4m	3.6W	50pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-40	240V	R/Y/O/G/B/W/WW/PK/P	40	4+1/9+1	5m	3.6W	40pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-50	240V	R/Y/O/G/B/W/WW/PK/P	50	4+1/9+1	5m	3.6W	40pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-60	240V	R/Y/O/G/B/W/WW/PK/P	60	4+1/9+1	5m	3.6W	40pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-80	240V	R/Y/O/G/B/W/WW/PK/P	80	4+1/9+1	10m	7.2W	20pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-100	240V	R/Y/O/G/B/W/WW/PK/P	100	4+1/9+1	10m	7.2W	20pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-120	240V	R/Y/O/G/B/W/WW/PK/P	120	4+1/9+1	10m	7.2W	20pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-150	240V	R/Y/O/G/B/W/WW/PK/P	150	4+1/9+1	12m	10.8W	17pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-180	240V	R/Y/O/G/B/W/WW/PK/P	180	4+1/9+1	15m	10.8W	13pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-200	240V	R/Y/O/G/B/W/WW/PK/P	200	4+1/9+1	20m	14.4W	10pcs	1*0.5mm ² Rubber Wire	CE	IP67

* It can be customized on request.

RGB Color Changing Rubber Wire String Light

Customized

Operating Voltage:
24V/ 110-120V/ 220V-240V

Material Available:
0.5mm² PVC wire with shrinkable tube
0.5mm² Rubber wire with shrinkable tube

LED Colors Available:

Customized




RGB



Remote Control

Wire Colors Available:

Customized



R/Y/G/O/G/B/W/PK/BK

Flashing LED



Product Specification

CE RoHS

Item No.	Voltage	LED Colour	LED Qty	Flashing Type	Lenght	Power	Max. Connections	Wire Specification	Certification	IP
LED-DL-24V-30	24V	R/Y/O/G/B/W/WW/PK/P	30	RF, 17 Modes	4m	1.8W	7pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-24V-40	24V	R/Y/O/G/B/W/WW/PK/P	40	RF, 17 Modes	5m	1.8W	6pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-24V-50	24V	R/Y/O/G/B/W/WW/PK/P	50	RF, 17 Modes	5m	2.5W	6pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-24V-60	24V	R/Y/O/G/B/W/WW/PK/P	60	RF, 17 Modes	5m	3.6W	6pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-24V-80	24V	R/Y/O/G/B/W/WW/PK/P	80	RF, 17 Modes	10m	2.8W	5pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-24V-100	24V	R/Y/O/G/B/W/WW/PK/P	100	RF, 17 Modes	10m	5W	5pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-30	240V	R/Y/O/G/B/W/WW/PK/P	30	RF, 17 Modes	4m	3.6W	50pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-40	240V	R/Y/O/G/B/W/WW/PK/P	40	RF, 17 Modes	5m	3.6W	40pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-50	240V	R/Y/O/G/B/W/WW/PK/P	50	RF, 17 Modes	5m	3.6W	40pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-60	240V	R/Y/O/G/B/W/WW/PK/P	60	RF, 17 Modes	5m	3.6W	34pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-80	240V	R/Y/O/G/B/W/WW/PK/P	80	RF, 17 Modes	10m	3.6W	20pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-100	240V	R/Y/O/G/B/W/WW/PK/P	100	RF, 17 Modes	10m	7.2W	20pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-120	240V	R/Y/O/G/B/W/WW/PK/P	120	RF, 17 Modes	10m	7.2W	17pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-150	240V	R/Y/O/G/B/W/WW/PK/P	150	RF, 17 Modes	12m	7.2W	13pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-180	240V	R/Y/O/G/B/W/WW/PK/P	180	RF, 17 Modes	15m	7.2W	11pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-200	240V	R/Y/O/G/B/W/WW/PK/P	200	RF, 17 Modes	20m	10.8W	10pcs	1*0.5mm ² Rubber Wire	CE	IP67

* It can be customized on request.

Customized

Non-polarity Dual Color Rubber Wire String Light



Operating Voltage:
24V/ 110-120V/ 220V-240V

Material Available:
0.5mm² PVC wire with shrinkable tube
0.5mm² Rubber wire with shrinkable tube

LED Colors Available:

Customized

2500K-10000K

R/G/Y/B/O/P/PP

Flash Blubs

Wire Colors Available:

Customized

R/Y/G/DG/B/W/BK


Remote Control




Product Specification

Item No.	Voltage	LED Colour	LED Qty	Controller	Lenght	Power	Max. Connections	Wire Specification	Certification	IP
LED-DL-24V-30	24V	R/Y,R/B,R/G,R/W,R/WW R/PK,R/P,Y/B,Y/G,Y/W, Y/WW,Y/PK,Y/P,B/G,B/WB/ WW,B/PK,B/P,G/W, G/WW,G/PK,G/PW/WW W/PK,W/PWW/PK, WW/P/PK/P	30	RF, 17 Modes	4m	1.8W	7pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-24V-40	24V		40	RF, 17 Modes	5m	1.8W	6pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-24V-50	24V		50	RF, 17 Modes	5m	2.5W	6pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-24V-60	24V		60	RF, 17 Modes	5m	3.6W	6pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-24V-80	24V		80	RF, 17 Modes	10m	2.8W	5pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-24V-100	24V		100	RF, 17 Modes	10m	5W	5pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-30	240V		30	RF, 17 Modes	4m	3.6W	50pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-40	240V		40	RF, 17 Modes	5m	3.6W	40pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-50	240V		50	RF, 17 Modes	5m	3.6W	40pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-60	240V		60	RF, 17 Modes	5m	3.6W	34pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-80	240V		80	RF, 17 Modes	10m	3.6W	20pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-100	240V		100	RF, 17 Modes	10m	7.2W	20pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-120	240V		120	RF, 17 Modes	10m	7.2W	17pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-150	240V		150	RF, 17 Modes	12m	7.2W	13pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-180	240V		180	RF, 17 Modes	15m	7.2W	11pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-200	240V		200	RF, 17 Modes	20m	10.8W	10pcs	1*0.5mm ² Rubber Wire	CE	IP67


* It can be customized on request.

CE RoHS


Rubber Wire Curtain Light

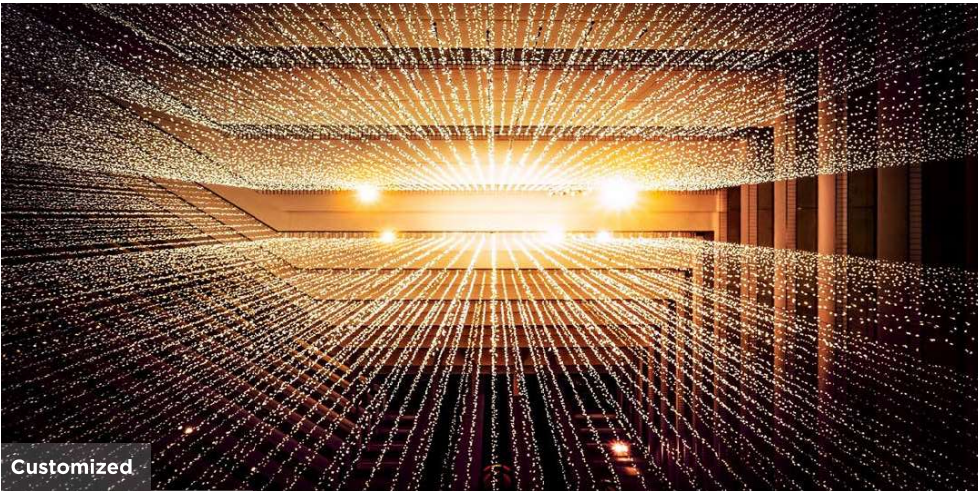

Operating Voltage: 24V/ 110-120V/ 220V-240V
Material: Rubber wire, 0.5mm² Copper Wire
LED Colors Available:



Wire Colors Available:




Product Specification											CE RoHS	
Item No.	Voltage	LED Colour	LED Qty	Outlets Qty	Specification of String	Power	Max. Connections	Flashing Type	Certification	IP		
DL-T10-24V-1*2M	24V	R/Y/O/G/B/W/WW/PK/P	200	10pcs/1m	2m/20LED	14.4W	8pcs	4+1/9+1	CE	IP67		
DL-T8-24V-1*2M	24V	R/Y/O/G/B/W/WW/PK/P	160	8pcs/1m	2m/20LED	11.5W	10pcs	4+1/9+1	CE	IP67		
DL-T5-24V-1*2M	24V	R/Y/O/G/B/W/WW/PK/P	100	5pcs/1m	2m/20LED	7.2W	17pcs	4+1/9+1	CE	IP67		
DL-T15-24V-1*2M	24V	R/Y/O/G/B/W/WW/PK/P	300	15pcs/2m	2m/20LED	21.6W	5pcs	4+1/9+1	CE	IP67		
DL-T16-24V-1*2M	24V	R/Y/O/G/B/W/WW/PK/P	320	16pcs/2m	2m/20LED	23W	5pcs	4+1/9+1	CE	IP67		
DL-T20-24V-1*2M	24V	R/Y/O/G/B/W/WW/PK/P	400	20pcs/2m	2m/20LED	28.8W	4pcs	4+1/9+1	CE	IP67		
DL-T10-240V-1*2M	240V	R/Y/O/G/B/W/WW/PK/P	200	10pcs/1m	2m/20LED	36W	14pcs	4+1/9+1	CE	IP67		
DL-T8-240V-1*2M	240V	R/Y/O/G/B/W/WW/PK/P	160	8pcs/1m	2m/20LED	28.8W	17pcs	4+1/9+1	CE	IP67		
DL-T5-240V-1*2M	240V	R/Y/O/G/B/W/WW/PK/P	100	5pcs/1m	2m/20LED	18W	28pcs	4+1/9+1	CE	IP67		
DL-T15-240V-1*2M	240V	R/Y/O/G/B/W/WW/PK/P	300	15pcs/2m	2m/20LED	54W	9pcs	4+1/9+1	CE	IP67		
DL-T16-240V-1*2M	240V	R/Y/O/G/B/W/WW/PK/P	320	16pcs/2m	2m/20LED	57.6W	9pcs	4+1/9+1	CE	IP67		
DL-T20-240V-1*2M	240V	R/Y/O/G/B/W/WW/PK/P	400	20pcs/2m	2m/20LED	72W	7pcs	4+1/9+1	CE	IP67		

* It can be customized on request.


Rubber Wire Icicle Light



Operating Voltage: 24V/ 110-120V/ 220V-240V
Material: Rubber wire, 0.5mm² Copper Wire
LED Colors Available:




Wire Colors Available:




Product Specification											CE RoHS	
Item No.	Voltage	LED Colour	LED Qty	Specification of String	Lenght	Power	Max. Connections	Flashing Type	Certification	IP		
ICE-DL-24V-32	24V	R/Y/O/G/B/W/WW/PK/P	32	2/4/6/8/6/4/2	1*0.8m	1.8W	10pcs	4+1/9+1	CE	IP67		
ICE-DL-24V-24	24V	R/Y/O/G/B/W/WW/PK/P	24	3/5/8/5/3	1*0.8m	1.1W	12pcs	4+1/9+1	CE	IP67		
ICE-DL-24V-38	24V	R/Y/O/G/B/W/WW/PK/P	38	2/5/7/10/7/5/2	1*1m	2.2W	8pcs	4+1/9+1	CE	IP67		
ICE-DL-24V-72	24V	R/Y/O/G/B/W/WW/PK/P	72	(3/5/8/5/3)*3	2*0.8m	3W	4pcs	4+1/9+1	CE	IP67		
ICE-DL-24V-104	24V	R/Y/O/G/B/W/WW/PK/P	104	(3/5/8)*6+5+3	2*0.8m	2.7W	3pcs	4+1/9+1	CE	IP67		
ICE-DL-24V-228	24V	R/Y/O/G/B/W/WW/PK/P	228	(2/5/7/10/7/5/2)*6	5*1m	13W	2pcs	4+1/9+1	CE	IP67		
ICE-DL-240V-32	240V	R/Y/O/G/B/W/WW/PK/P	32	2/4/6/8/6/4/2	1*0.8m	3.6W	50pcs	4+1/9+1	CE	IP67		
ICE-DL-240V-38	240V	R/Y/O/G/B/W/WW/PK/P	38	2/5/7/10/7/5/2	1*1m	3.6W	40pcs	4+1/9+1	CE	IP67		
ICE-DL-240V-42	240V	R/Y/O/G/B/W/WW/PK/P	42	3/5/8/10/8/5/3	1*1m	3.6W	40pcs	4+1/9+1	CE	IP67		
ICE-DL-240V-192	240V	R/Y/O/G/B/W/WW/PK/P	192	(2/4/6/8/6/4/2)*6	5*0.8m	10.8W	20pcs	4+1/9+1	CE	IP67		
ICE-DL-240V-228	240V	R/Y/O/G/B/W/WW/PK/P	228	(2/5/7/10/7/5/2)*6	5*1m	14.4W	20pcs	4+1/9+1	CE	IP67		
ICE-DL-240V-252	240V	R/Y/O/G/B/W/WW/PK/P	252	(3/5/8/10/8/5/3)*6	5*1m	14.4W	20pcs	4+1/9+1	CE	IP67		
ICE-DL-240V-104	240V	R/Y/O/G/B/W/WW/PK/P	104	(3/5/8)*6+5+3	3*0.8m	7.2W	20pcs	4+1/9+1	CE	IP67		

* It can be customized on request.


PVC Wire Curtain Light

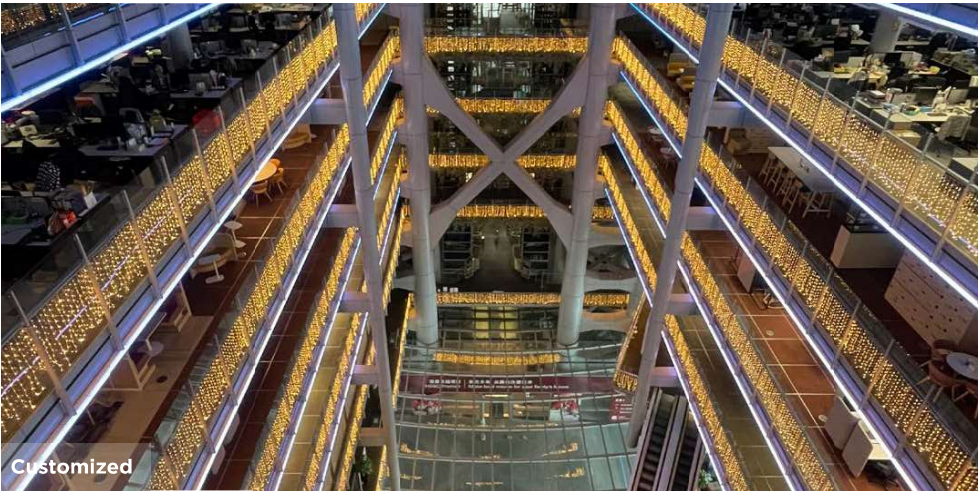

Operating Voltage: 24V/ 110-120V/ 220V-240V
Material: PVC wire, 0.5mm² Copper Wire
LED Colors Available:



Wire Colors Available:



Product Specification


Item No.	Voltage	LED Colour	LED Qty	Outlets Qty	Specification of String	Power	Max. Connections	Flashing Type	Certification	IP
IL-T10-24V-1*2M	24V	R/Y/O/G/B/W/WW/PK/P	200	10pcs/1m	2m/20LED	14.4W	8pcs	4+1/9+1	CE	IP67
IL-T8-24V-1*2M	24V	R/Y/O/G/B/W/WW/PK/P	160	8pcs/1m	2m/21LED	11.5W	10pcs	4+1/9+1	CE	IP67
IL-T5-24V-1*2M	24V	R/Y/O/G/B/W/WW/PK/P	100	5pcs/1m	2m/22LED	7.2W	17pcs	4+1/9+1	CE	IP67
IL-T15-24V-1*2M	24V	R/Y/O/G/B/W/WW/PK/P	300	15pcs/2m	2m/23LED	21.6W	5pcs	4+1/9+1	CE	IP67
IL-T16-24V-1*2M	24V	R/Y/O/G/B/W/WW/PK/P	320	16pcs/2m	2m/24LED	23W	5pcs	4+1/9+1	CE	IP67
IL-T20-24V-1*2M	24V	R/Y/O/G/B/W/WW/PK/P	400	20pcs/2m	2m/25LED	28.8W	4pcs	4+1/9+1	CE	IP67
IL-T10-110V-1*2M	110V	R/Y/O/G/B/W/WW/PK/P	200	10pcs/1m	2m/26LED	16.5W	14pcs	4+1/9+1	ETL	IP67
IL-T8-110V-1*2M	110V	R/Y/O/G/B/W/WW/PK/P	160	8pcs/1m	2m/27LED	13.2W	17pcs	4+1/9+1	ETL	IP67
IL-T5-110V-1*2M	110V	R/Y/O/G/B/W/WW/PK/P	100	5pcs/1m	2m/28LED	8.3W	28pcs	4+1/9+1	ETL	IP67
IL-T15-110V-1*2M	110V	R/Y/O/G/B/W/WW/PK/P	300	15pcs/2m	2m/29LED	24.8W	9pcs	4+1/9+1	ETL	IP67
IL-T16-110V-1*2M	110V	R/Y/O/G/B/W/WW/PK/P	320	16pcs/2m	2m/30LED	26.4W	9pcs	4+1/9+1	ETL	IP67
IL-T20-110V-1*2M	110V	R/Y/O/G/B/W/WW/PK/P	400	20pcs/2m	2m/31LED	33W	7pcs	4+1/9+1	ETL	IP67
IL-T10-240V-1*2M	240V	R/Y/O/G/B/W/WW/PK/P	200	10pcs/1m	2m/32LED	36W	14pcs	4+1/9+1	CE	IP67
IL-T8-240V-1*2M	240V	R/Y/O/G/B/W/WW/PK/P	160	8pcs/1m	2m/33LED	28.8W	17pcs	4+1/9+1	CE	IP67
IL-T5-240V-1*2M	240V	R/Y/O/G/B/W/WW/PK/P	100	5pcs/1m	2m/34LED	18W	28pcs	4+1/9+1	CE	IP67
IL-T15-240V-1*2M	240V	R/Y/O/G/B/W/WW/PK/P	300	15pcs/2m	2m/35LED	54W	9pcs	4+1/9+1	CE	IP67
IL-T16-240V-1*2M	240V	R/Y/O/G/B/W/WW/PK/P	320	16pcs/2m	2m/36LED	57.6W	9pcs	4+1/9+1	CE	IP67
IL-T20-240V-1*2M	240V	R/Y/O/G/B/W/WW/PK/P	400	20pcs/2m	2m/37LED	72W	7pcs	4+1/9+1	CE	IP67

* It can be customized on request.


PVC Wire Icicle Light



Operating Voltage: 24V/ 110-120V/ 220V-240V
Material: PVC wire, 0.5mm² Copper Wire
LED Colors Available:



Wire Colors Available:



Product Specification

Item No.	Voltage	LED Colour	LED Qty	Specification of String	Length	Power	Max. Connections	Flashing Type	Certification	IP
ICE-IL-24V-32	24V	R/Y/O/G/B/W/WW/PK/P	32	2/4/6/8/6/4/2	1*0.8m	1.8W	10pcs	4+1/9+1	CE	IP67
ICE-IL-24V-24	24V	R/Y/O/G/B/W/WW/PK/P	24	3/5/8/5/3	1*0.8m	1.1W	12pcs	4+1/9+1	CE	IP67
ICE-IL-24V-38	24V	R/Y/O/G/B/W/WW/PK/P	38	2/5/7/10/7/5/2	1*1m	2.2W	8pcs	4+1/9+1	CE	IP67
ICE-IL-24V-72	24V	R/Y/O/G/B/W/WW/PK/P	72	(3/5/8/5/3)*3	2*0.8m	3W	4pcs	4+1/9+1	CE	IP67
ICE-IL-24V-104	24V	R/Y/O/G/B/W/WW/PK/P	104	(3/5/8)*6+5+3	2*0.8m	2.7W	3pcs	4+1/9+1	CE	IP67
ICE-IL-24V-228	24V	R/Y/O/G/B/W/WW/PK/P	228	(2/5/7/10/7/5/2)*6	5*1m	13W	2pcs	4+1/9+1	CE	IP67
ICE-IL-110V-32	110V	R/Y/O/G/B/W/WW/PK/P	32	2/4/6/8/6/4/2	1*0.8m	1.65W	25pcs	4+1/9+1	ETL	IP67
ICE-IL-110V-38	110V	R/Y/O/G/B/W/WW/PK/P	38	2/5/7/10/7/5/2	1*1m	3.3W	20pcs	4+1/9+1	ETL	IP67
ICE-IL-110V-42	110V	R/Y/O/G/B/W/WW/PK/P	42	3/5/8/10/8/5/3	1*1m	3.3W	20pcs	4+1/9+1	ETL	IP67
ICE-IL-110V-192	110V	R/Y/O/G/B/W/WW/PK/P	192	(2/4/6/8/6/4/2)*6	5*0.8m	9.9W	10pcs	4+1/9+1	ETL	IP67
ICE-IL-110V-228	110V	R/Y/O/G/B/W/WW/PK/P	228	(2/5/7/10/7/5/2)*6	5*1m	19.8W	10pcs	4+1/9+1	ETL	IP67
ICE-IL-110V-252	110V	R/Y/O/G/B/W/WW/PK/P	252	(3/5/8/10/8/5/3)*6	5*1m	11.5W	10pcs	4+1/9+1	ETL	IP67
ICE-IL-110V-104	110V	R/Y/O/G/B/W/WW/PK/P	104	(3/5/8)*6+5+3	3*0.8m	6.6W	10pcs	4+1/9+1	ETL	IP67
ICE-IL-240V-32	240V	R/Y/O/G/B/W/WW/PK/P	32	2/4/6/8/6/4/2	1*0.8m	3.6W	50pcs	4+1/9+1	CE	IP67
ICE-IL-240V-38	240V	R/Y/O/G/B/W/WW/PK/P	38	2/5/7/10/7/5/2	1*1m	3.6W	40pcs	4+1/9+1	CE	IP67
ICE-IL-240V-42	240V	R/Y/O/G/B/W/WW/PK/P	42	3/5/8/10/8/5/3	1*1m	3.6W	40pcs	4+1/9+1	CE	IP67
ICE-IL-240V-192	240V	R/Y/O/G/B/W/WW/PK/P	192	(2/4/6/8/6/4/2)*6	5*0.8m	10.8W	20pcs	4+1/9+1	CE	IP67
ICE-IL-240V-228	240V	R/Y/O/G/B/W/WW/PK/P	228	(2/5/7/10/7/5/2)*6	5*1m	14.4W	20pcs	4+1/9+1	CE	IP67
ICE-IL-240V-252	240V	R/Y/O/G/B/W/WW/PK/P	252	(3/5/8/10/8/5/3)*6	5*1m	14.4W	20pcs	4+1/9+1	CE	IP67
ICE-IL-240V-104	240V	R/Y/O/G/B/W/WW/PK/P	104	(3/5/8)*6+5+3	3*0.8m	7.2W	20pcs	4+1/9+1	CE	IP67


* It can be customized on request.

Rubber Wire Net Light




Operating Voltage: 12V/ 24V/ 110-120V/ 220V-240V
Material Available: PVC wire, 0.5mm² Copper Wire
Rubber wire, 0.5mm² Copper Wire

LED Colors Available:



Wire Colors Available:



Product Specification



Item No.	Voltage	LED Colour	LED Qty	Flashing Type	Net Size	Power	Max. Connections	Wire Specification	Certification	IP
NET-DL-24V-60	24V	R/Y/O/G/B/W/WW/PK/P	60	4+1/9+1	1*0.8m	3.6W	5pcs	1*0.5mm ² Rubber Wire	CE	IP67
NET-DL-24V-80	24V	R/Y/O/G/B/W/WW/PK/P	80	4+1/9+1	1*0.5m	3.6W	5pcs	1*0.5mm ² Rubber Wire	CE	IP67
NET-DL-24V-96	240V	R/Y/O/G/B/W/WW/PK/P	96	4+1/9+1	1*1.5m	7.2W	50pcs	1*0.5mm ² Rubber Wire	CE	IP67
NET-DL-24V-150	240V	R/Y/O/G/B/W/WW/PK/P	150	4+1/9+1	1.5*1.5m	10.8W	40pcs	1*0.5mm ² Rubber Wire	CE	IP67
NET-DL-24V-176	240V	R/Y/O/G/B/W/WW/PK/P	176	4+1/9+1	2*2m	14.4W	25pcs	1*0.5mm ² Rubber Wire	CE	IP67
NET-DL-24V-180	240V	R/Y/O/G/B/W/WW/PK/P	180	4+1/9+1	1.8*1.5m	10.8W	40pcs	1*0.5mm ² Rubber Wire	CE	IP67
NET-DL-240V-216	240V	R/Y/O/G/B/W/WW/PK/P	216	4+1/9+1	2*3m	14.4W	25pcs	1*0.5mm ² Rubber Wire	CE	IP67

* It can be customized on request.

Rubber Wire Firecracker Light




Operating Voltage: 12V/ 24V/ 110-120V/ 220V-240V
Material Available: PVC wire, 0.5mm² Copper Wire
Rubber wire, 0.5mm² Copper Wire


LED Colors Available:



Wire Colors Available:



Product Specification



Item No.	Voltage	LED Colour	LED Qty	Controller	Size	Power	Max. Connections	Wire Specification	Certification	IP
LED-DL-24V-70	24V	R/Y/O/G/B/W/WW/PK/P	70	10 circuit, 3 speed	1m	3.6W	5pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-240	240V	R/Y/O/G/B/W/WW/PK/P	240	4 circuit, 3 speed	4m	7.2W	50pcs	1*0.5mm ² Rubber Wire	CE	IP67
LED-DL-240V-300	240V	R/Y/O/G/B/W/WW/PK/P	300	10 circuit, 3 speed	3m	10.8W	40pcs	1*0.5mm ² Rubber Wire	CE	IP67

* It can be customized on request.

Fairy Light



Customized

Operating Voltage: 3V/ 5V/ 12V/ 24V
Material: PVC wire, 0.2mm² Copper Wire
LED Colors Available:

Customized

2500K-4000K

R/Y/O/G/B/W/WW/PK/P

Flash Bulbs

Wire Colors Available:

Customized

R/Y/O/G/B/W/WW/PK/T


Product Specification



Item No.	Voltage	LED Colour	LED Qty	Power Source	Size	Power	Max. Connections	Wire Specification	Certification	IP
FL-3V-100	3V	R/Y/O/G/B/W/WW/PK/P	100	Battery/Solar/Adaptor/USB	10m	6W	1pcs	1*2mm ² Flat Wire	CE/ETL	IP55
FL-3V-400	3V	R/Y/O/G/B/W/WW/PK/P	100		10m	6W	1pcs	1*2mm ² Flat Wire	CE/ETL	IP55
FL-24V-100	24V	R/Y/O/G/B/W/WW/PK/P	100		10m	6W	1pcs	1*3.5mm ² Flat Wire	CE/ETL	IP55

* It can be customized on request.

RGB Fairy Light

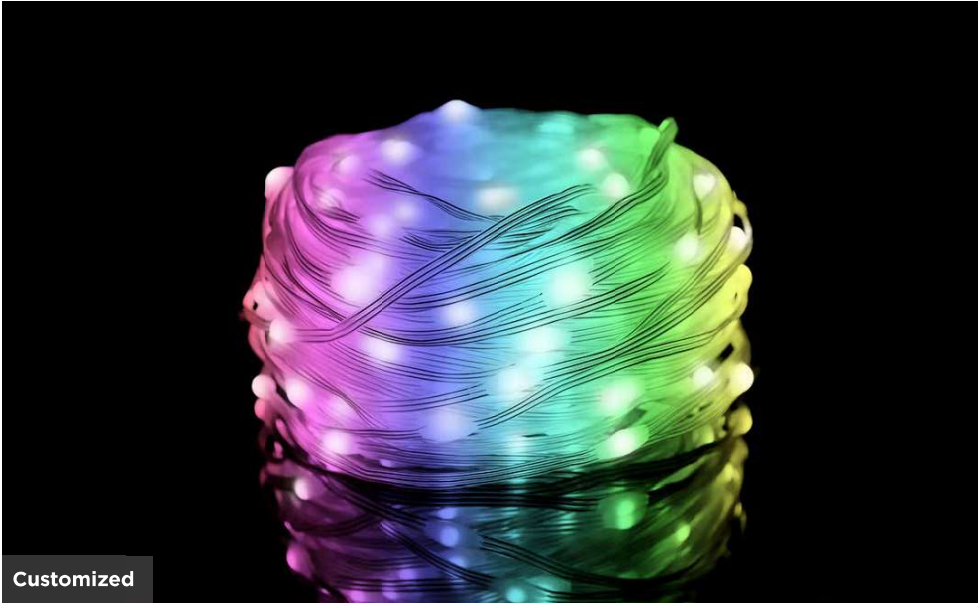

Customized

Operating Voltage: 5V/ 12V/ 24V
Material: PVC wire, 0.5mm² Copper Wire
LED Colors Available:

Customized

RGB

Wire Colors Available:

Customized

R/Y/O/G/B/W/WW/PK/T

Product Specification



Item No.	Voltage	LED Colour	LED Qty	Power Source	Size	Power	Max. Connections	Wire Specification	Certification	IP
FL-5V-100-RGB	5V	R/Y/O/G/B/W/WW/PK/P	100	Adaptor/USB/	10m	2.5W	1pcs	1*3.5mm ² Flat Wire	CE/ETL	IP55
FL-5V-200-RGB	5V	R/Y/O/G/B/W/WW/PK/P	200	Bluetooth/Wifi/	20m	5W	1pcs	1*3.5mm ² Flat Wire	CE/ETL	IP55
FL-5V-300-RGB	5V	R/Y/O/G/B/W/WW/PK/P	300	Remote	30m	7.5W	1pcs	1*3.5mm ² Flat Wire	CE/ETL	IP55

* It can be customized on request.

Fairy Icicle Light



Customized

Operating Voltage: 3V/ 5V/ 12V/ 24V
Material: PVC wire, 0.2mm² Copper Wire
LED Colors Available:

Customized

2500K-4000K

R/Y/O/G/B/W/WW/PK/PP

Flash Bulbs

Wire Colors Available:

Customized

R/Y/G/DG/B/W/BK/T

Product Specification

Item No.	Voltage	LED Colour	LED Qty	String Light Spec.	Size	Power	Max. Connections	Wire Specification	Certification	IP
ICE-FL-24V-40	24V	R/Y/O/G/B/W/WW/PK/P	40	(2/4/6/8)*2	1*0.8m	4W	15pcs	1*2mm ² Flat Wire	CE/ETL	IP55
ICE-FL-24V-48	24V	R/Y/O/G/B/W/WW/PK/P	48	(3/5/7/9)*2	1*0.9m	4.8W	15pcs	1*2mm ² Flat Wire	CE/ETL	IP55
ICE-FL-24V-80	24V	R/Y/O/G/B/W/WW/PK/P	80	(10/10/10/10)*2	1*1m	8W	10pcs	1*2mm ² Flat Wire	CE/ETL	IP55

* It can be customized on request.



LED light String Accessory

Connection



2 Output Injection-moulded Connector



3 Output Injection-moulded Connector



4 Output Injection-moulded Connector



5 Output Injection-moulded Connector



6 Output Injection-moulded Connector



Extension Cable



Power Socket Tail



T-connector with Cable



Shrinkable Tube for Connector



T-connector



U-connector



Circle Connector
(1 male connector + 5 female connector)