


(直驅&下掛)

工業用縫紉機 伺服馬達

Energy Saving Servo Motor

Compatible for Direct drive and belt type For Industrial Sewing machine

SV-870



■ EASY INSTALLATION FOR ALL BRANDS OF SEWING MACHINES

Optional 選購配件



立式三踏板
Operation 3
Pedals PK-71




立式單踏板
Operation 1 Pedal PK-81



簡易平車選針盒
External Control Panel
for Lock Stitch C-12



採用直驅伺服馬達，起縫快速，定位精準，低噪音，無皮帶屑污染
Use direct drive servo motor system provides quick start sewing, precise positioning, low noise, and no belt dust.

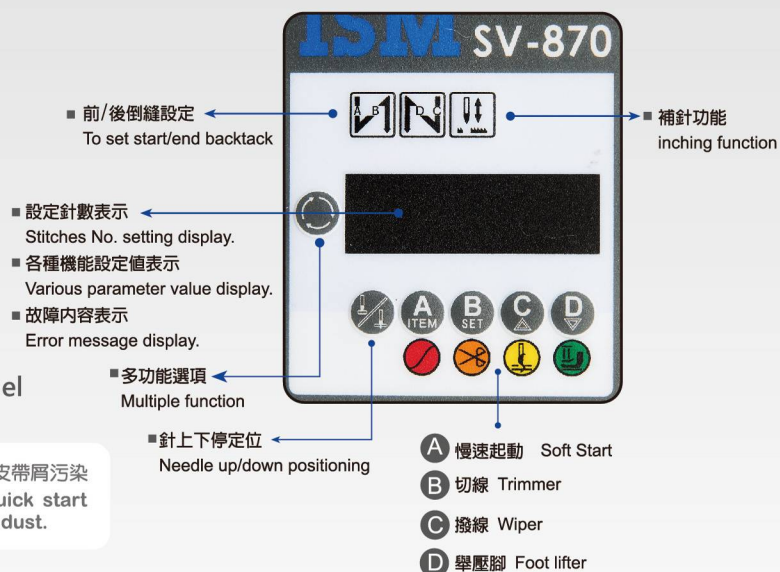

Specification 規格表

規格	SPECIFICATION	SV-870	SV-870 D.D
輸入電壓	Input Power Voltage	1 ψ , AC 200~240V	1 ψ , AC 200~240V
LED電源輸出(DC12V)	External LED Output(DC12V)	✓	✓
馬達選項	Motor Type	Belt type motor	Direct drive motor
上/下停針控制	Needle Up/Down	✓	✓
最高速設定	Max. Speed Setting	✓	✓
慢速啟動	Soft Start	✓	✓
切線後反轉	Reverse After Thread Trimming	✓	✓
一發著針功能(快速定位停)	One Shot Positioning(Fast Positioning)	✓	✓
診斷模式(檢查輸出/輸入狀態)	Diagnostic Mode (Inspect I/O Condition)	✓	✓
故障錯誤記錄(前6次)	ERROR History Mode(Record Previous 6 Times)	✓	✓
輸入接點數(可依需求設定)	Input Ports No.(According to requirements)	4	4
輸出接點數(可依需求設定)	Output Ports No.(According to requirements)	4	4
連結立式踏板(PK-71, PK-81)	Connect Standing Operation Pedals (PK-71, PK-81)	✓	✓
連結選針盒(C-12)	Connect External Operation Panel(C12)	✓	✓

馬達規格 Motor specification

下掛馬達 Belt type Motor

SM 7 1 4 5 5 0

馬達額定出力 Motor Rated Output Power	馬達轉速 Motor Speed
45	450W
55	550W
65	650W
50	5000 RPM
35	3500 RPM

直驅馬達 Direct Drive Motor

7	拷克車 / 三本車	Over lock / Inter lock
6	四針六線 / 羅拉車	Four needle six thread / Post bed

直驅馬達規格 Type of Direct Drive Motor

馬達額定出力 Motor Rated Output Power	馬達轉速 Motor Speed	針車品牌 Sewing Machine brand
35	350W	JK JUKI
50	500W	PG PEGASUS
55	550W	YM YAMATO
65	650W	
42	4200 Rpm	
60	6000 Rpm	
70	7000 Rpm	

針車型號 Sewing Machine Model

SM7-3570-JK3	MO6700 / MO6900
SM7-3570-JK4	MO6500 / MO6800
SM7-6560-JK1	MF7500 / MF7900
SM7-3570-PG1	M800 / M900 / EX / MX
SM7-6560-PG6	W series / Inter lock
SM7-3570-YM3	Az / CZ Series
SM7-6560-YM3	VG / VC / CC
SM7-6560-YM4	VT
SM7-6560-YM5	VF / CF
SM7-6560-YM6	VE
SM6-5542-YM4	FD-62DRY