

PRODUCT CATALOGUE

2023
24

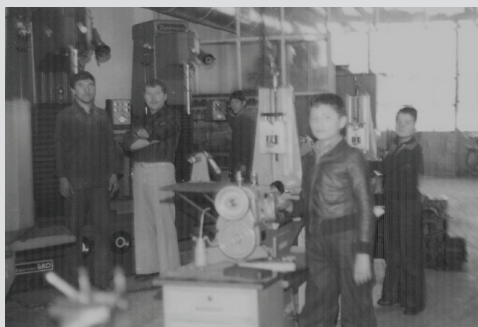
BM Y®
CONNECTING
ROD

CONNECTING ROD & COMPONENTS
PLEUELSTANGE & KOMPONENTEN
PISTON KOLU & EKİPMANLARI



**HELLO | HALLO | MERHABA****1971**

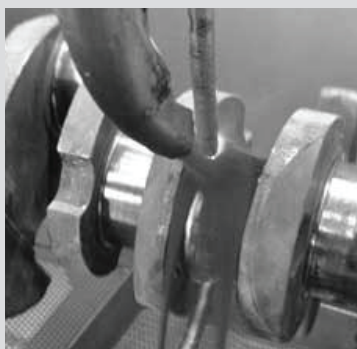
The foundations of our company were laid by Salih Öztaş with the opening of a 35m² motor rectification shop.

**1979**

We moved to an 300 m² area in Konya Karatay industrial site.

1994

With Crankshaft welding, we have started our complete crankshaft revision activities and we have incorporated Surface Roughness and Hardness Testing, Electromagnetic Crankshaft Inspection systems into our company.

**In this catalogue,**

In this catalogue we offer you the products of BMY which is the best aftermarket connecting rod manufacturer. Having proven itself in the international automotive spare parts market, especially in the production of connecting rods of light commercial and passenger vehicles, BMY is a supplier to the world's leading automotive companies. Quality products, reassuring sales and after-sales services, product variety, fast shipping, 100,000 km engine warranty are among the most important reasons for choosing BMY products. Today, as BMY, we are experiencing the happiness of this trust and preference. We continue to grow by sharing our happiness, trust and earnings with our suppliers, customers and employees. You can always contact BMY about our company and our products in this catalogue. We would like to express our deepest gratitude to you for your interest. Together to many great happiness and success ...

BMY Family

In diesem Katalog,

In diesem Katalog bieten wir Ihnen die Produkte von BMY an, dem besten Hersteller von Pleuelstangen für den Ersatzteilmarkt. BMY hat sich auf dem internationalen Markt für Kfz-Ersatzteile, insbesondere bei der Herstellung von Pleueln für leichte Nutz- und Personenkraftwagen, bewährt und ist Zulieferer der weltweit führenden Automobilunternehmen. Qualitätsprodukte, beruhigende Verkaufs- und Kundendienstleistungen, Produktvielfalt, schneller Versand und 100.000 km Motorgarantie sind die wichtigsten Gründe für die Wahl von BMY-Produkten.

1996

We started our wholesale spare parts sales activities.

2003

We moved to our new location of 2000m²

2008

We have obtained ISO 9001: 2008 Quality Certificate.

2009

We have started Connecting Rod Manufacturing

2016

We have expanded our factory site for flexible and efficient production. Molding operations started in own factory. We have founded Quality Control Laboratory.

2017

Hot forging operations started in-house.



2018

Updated ISO 9001: 2015 Quality Certificate. We have started to apply Product Liability Insurance for all products.

2019

In order to increase our production efficiency, to use our machine, human, time and raw material resources in the most effective way and to minimize human error, we have implemented ERP (Enterprise Resource Planning) software. We chose Canias ERP which is one of the best software in its field on a global scale.

2021

Double disc grinding and torquing units with automatic transducer were put into operation.

2022

We moved to our new factory for new products, fast shipping, higher volume production.

2023

We made a new forging investment in order to forge products for heavy vehicles, construction equipment, railways, agricultural group, energy sector.

Heute erleben wir als BMY das Glück dieses Vertrauens und dieser Präferenz. Wir wachsen weiter, indem wir unser Glück, Vertrauen und Ergebnis mit unseren Lieferanten, Kunden und Mitarbeitern teilen. Sie können BMY jederzeit über unser Unternehmen und unsere Produkte in diesem Katalog kontaktieren. Wir möchten Ihnen unseren tiefsten Dank für Ihr Interesse aussprechen. Zusammen zu vielen großen Glück und Erfolg ...

BMY Familie

Bu Katalogda,

Size dünyanın en iyi aftermarket biyel kolu üreticisi olan BMY'nın ürünlerini sunmaktayız. Özellikle hafif ticari ve binek araçların biyel kolları üretiminde kendini uluslararası otomotiv yedek parça pazarında ispatlayan BMY, dünyanın önde gelen otomotiv firmalarına tedarikçilik yapmaktadır. Kaliteli ürünler, güven veren satış ve satış sonrası hizmetleri, ürün çeşitliliği, hızlı sevkiyatı, 100.000 km motor garantisi BMY ürünlerinin en önemli tercih sebeplerindendir. Bugün BMY olarak bu güvenin ve tercihlerin mutluluğunu yaşıyoruz. Mutluluğumuzu, güvenimizi ve kazancı tedarikçilerimizle, müşterilerimizle, çalışanlarımızla paylaşarak büyümeye devam ediyoruz. Bu katalogta bulunan ürünlerimiz ve firmamızla ilgili BMY ile her zaman iletişime geçebileceğinizi belirtmek isteriz. Göstermiş olduğunuz ilgiden dolayı en derin teşekkürlerimizi sunarız. Hep beraber nice büyük mutluluk ve başarılarla...

BMY Ailesi

BMY®
CONNECTING
ROD

Kalite Politikamız
Ahlak ve vicdani değerler çerçevesinde, en iyi şekilde çalışarak, katma değeri ürünler üretmek.
Ne ürettiğimizi bilincinde, işimizi severek en iyi şekilde yapmak.
En iyi şekilde yaptığımız işlerimize, müşterilerimize ve ürün kullananlarımıza mutlu etmek.
Mutlu müşterilerimizin sayısını her geçen gün artırarak, sektöründe global bir marka haline getirmek.
Sevilen ve saygı duyulan global bir marka olarak, toplumlara rol model olmak.

Our quality policy
To produce value-added products by working in the best way within the framework of moral and conscientious values.
To do our job in the best way with the awareness of what we produce
To make our customers and product users happy with the works we do in the best way.
To become a global brand in the sector by increasing the number of our happy customers day by day.
To be a role model to societies as a loved and respected global brand.

VISION
MISSION
VİZYONUMUZ
MİSYONUMUZ

BMY®
CONNECTING
ROD

Taahhütümüzdür
BMY yönetimi üretim tesislerinde, aşağıdaki beşeri ve fiziki unsurları sağlama ve güvene altına almayı amaçlar.
Personeli kargu aidi etmek ve ayarını yapmaması, kutulandırmaması, etiket koyması, di. di. ve diğer ayarını yapmaması.
Düğüncü ve fikir özgürlükleri saygı duyarak ve bunu garanti altına almak.
Kadınları, köpekleri, paylaşımları, barajları, okulları, fırsat eşitliği sağlamak.
İş sağlığı ve güvenliği kurallarına riayet etmek, bunun uygulayıcısı ve takipçisi olmak.
Our Commitment
BMY management has ensured that the following humane and physical elements are provided in the production facilities.
To be fair to their staff and not to discriminate. Not to polarize, not to discriminate based on ethnicity, language, religion and gender.
To respect and guarantee freedom of thought and opinion.
To be participatory, inclusive, sharing, peaceful and provide equal opportunity.
To be a practitioner and follower of occupational health and safety rules.

İLKELERİMİZ
OUR PRINCIPLES

BMY®
CONNECTING
ROD

Müşterilerimiz için değer yaratmak, taleplerini kaliteli ve rekabetçi karşılık vermek **ik önceliğimizdir**. Ürünlerimize sahip çıkmak ve satış sonrasında da müşterilerimizin yanında olmak **görevimizdir**. Ürün ve hizmetimizin kalitesi seviyesinin kalitesini başlatır. En iyi personel ve yetkin insan gücünü istihdam etmek, insanın yeteneklerinden ve yaratıcılığında en üst düzeyde fayda sağlamak, verimliliğini artırmak, gelişmesine imkan tanımak ve dışarıya doğru bir gelişme ortamı yaratmak, şirketimizin kupakları boyu ilerlemesini sağlamak için **stratejimizdir**. Tedarikçilerimizle ve müşterilerimizle, tüm insan ve ticari ilişkilerimizde adil, iyi niyet ve anlayış davranmak, yasaları ve ahlak kurallarına uymak **ilkelerimizdir**.
Our first priority is to create value for our customers and to respond to their expectations with quality and stability. It is our **duty** to stick by our products and to be with our customers after sales. The quality of our product and business starts with the quality of our team. In order to ensure the continuity of our company for generations, our **strategy** is to employ the best personnel and trained manpower, to benefit from the talents and creativity of our people at the highest level, to increase their productivity, to enable them to develop and to create a working environment with solidarity. It is our **indispensable** principle to behave fairly, in good faith and understanding in all our human affairs and commercial relations with our suppliers and customers, and to comply with the laws and ethical rules.

What is connecting rod?

Connecting rod is an engine equipment that connects one end to the piston with the help of a pin and bushing and the other wide end to the crankshaft by means of a crank pin and enables the crankshaft to rotate by converting the reciprocating movement of the piston in the cylinder into rotating motion. In addition, during the operation of the engine, together with the piston pin, it is the part where the most mechanical strength is applied.

Was ist Pleuelstange?

Die Pleuelstange ist eine Motorausrüstung, die ein Ende mit Hilfe eines Stifts und einer Buchse mit dem Kolben und das andere breite Ende mit Hilfe eines Kurbelzapfens mit der Kurbelwelle verbindet und es der Kurbelwelle ermöglicht, sich zu drehen, indem die Hin- und Herbewegung des Kolbens umgewandelt wird der Zylinder in Drehbewegung. Darüber hinaus ist es während des Betriebs des Motors zusammen mit dem Kolbenbolzen der Teil, an dem die meiste mechanische Festigkeit angewendet wird.

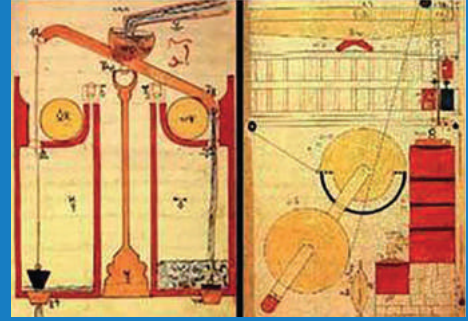
Biyel kolu nedir?

Biyel kolu bir ucı perno ve kol burcu yardımıyla pistonu ve diğer büyük ucu ise krank pimi ile krank miline bağlanan, pistonun silindir içinde yaptığı dikey hareketi, dairesel harekete çevirerek krank milinin dönmesini sağlayan bir motor ekipmanıdır. Ayrıca motorun çalışma esnasında piston pernosu ile birlikte mekanik olarak en çok mukavemet uygulanan parçasıdır.

Did you know ?

Connecting rod is firstly used by scientist Ismail Al-Jazari in Cizre which is in the southeast of Turkey, in 1198 in order to pump water.

The connecting rod, which has been developed over time, has been used in steam locomotives and mill machines, and today it continues to exist in gasoline, diesel, hybrid and hydrogen engines.



Wussten Sie schon ?

Die Pleuelstange wird erstmals 1198 vom Wissenschaftler Ismail Al-Jazari in Cizre im Südosten der Türkei verwendet, um Wasser zu pumpen. Die im Laufe der Zeit entwickelte Pleuelstange wurde in Dampflokomotiven und Mühlenmaschinen eingesetzt und ist bis heute in Benzin-, Diesel-, Hybrid- und Wasserstoffmotoren vorhanden.

Biliyor muydunuz ?

Biyel kolu ilk olarak 1198 yılında Türkiye'nin güney doğusunda bulunan Cizre'de, bilim adamı Ismail El-Cezeri tarafından su pompalamak amacıyla kullanılmıştır. Zamanla geliştirilerek buharlı lokomotiflerde, değirmen makinalarında kullanıldıktan sonra günümüzde, benzinli, dizel, hybrid ve hidrojenli motorlarda varlığını sürdürmektedir.



BMY products are manufactured with hot forging method.

BMY-Produkte werden im Heischmiedeverfahren hergestellt.

BMY rnleri sıcak dvme yntemiyle retilmektedir.



BMY uses rolled-locked type leadfree bushings which are made of steel outside and bronze inside. The high quality of the bushes prevents them from rotating in their bearings.

BMY verwendet bleifrei gewalzte Buchsen, die auen aus Stahl und innen aus Bronze bestehen. Die hohe Qualitt der Buchsen verhindert, dass sie sich in ihren Lagern drehen.


BMY, Dıı elik, ii sarı kurunsuz malzemedен kıvrıma ve kilitli tip olarak retilen kol burlarını kullanmaktadır. Yksek kaliteli kol burlarıyla, kol burcunun, yuvasında dnmesi engelenmi olur.



The cold forged bolts are of 10.9 and 12.9 quality.

Die kaltgeschmiedeten Schrauben haben eine Qualitt von 10,9 und 12,9.

Souk dvme yntemiyle retilen cıvatalar 10.9 ve 12.9 kalitesindedir.



The weight is adjusted while still in the moulding phase with the CAD program, and the tolerances are kept inside minimum values range.

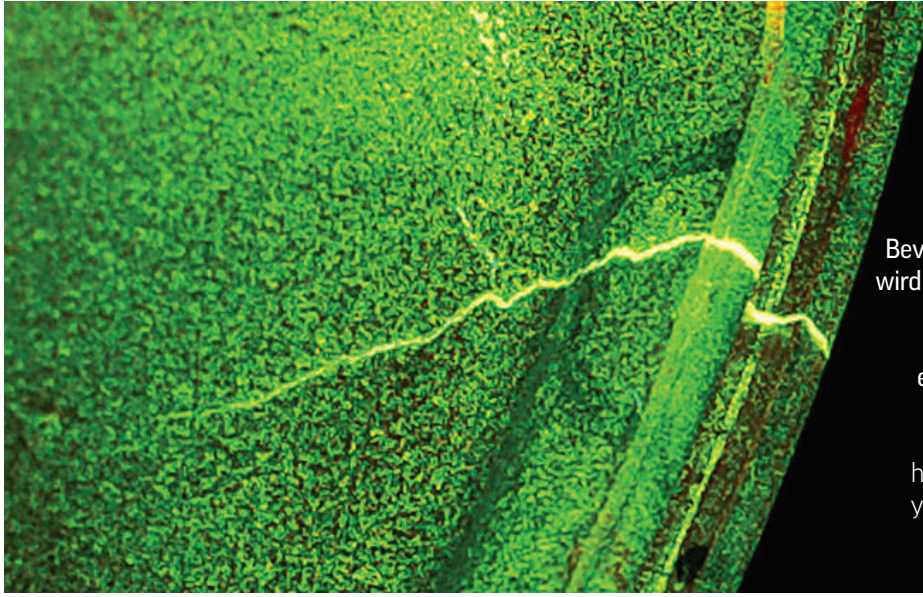
Das Gewicht wird noch in der Formphase mit dem CAD-Programm eingestellt und die Toleranzen werden innerhalb des Mindestwertbereichs gehalten.

Aırlık henz CAD programı ile kalıplama aamasındayken ayarlanıp, toleransları minimum seviyede tutulmaktadır.

BMY has been producing with the know-how in engine technologies, which comes from experience of engine rebuilding since 1971. Today, it continues to produce with the steel forging method with brand new and state-of-the-art production lines.

BMY produziert seit 1971 mit dem Know-how in Motorentechnologien, basierend auf Erfahrungen mit Motorreparaturen. Heute produziert BMY weiterhin im Stahlschmiedeverfahren mit brandneuen und hochmodernen Produktionslinien.

BMY Motor rektifiyecilikten gelen 1971 yılından beri motor teknolojilerinde sahip olduu know-how ile retimlerini gerekletirmektedir. Bugn yepyeni ve son teknoloji retim hatlarıyla, elik dvme yntemiyle retmeye devam ediyor.



Before our connecting rods are forged, micro fracture control is performed while they are in raw material state. After forging, it is subjected to a fracture test again.

Bevor unsere Pleuel geschmiedet werden, wird die Mikrobruchkontrolle durchgeführt, während sie sich im Rohstoffzustand befinden. Nach dem Schmieden wird es erneut einem Bruchtest unterzogen.

Biyel kollarımız henüz dövülmeden hammadde halindeyken çatlak kontrolü yapılır. Dövüldükten sonra tekrar çatlak testine tabi tutulur.



Connecting rods are individually controlled for size, hardness and surface roughness. Each connecting rod produced is given an identity number and in case of any malfunction, its feedback can be obtained easily.

Pleuelstangen werden individuell für die Größe, die Härte und Oberflächenrauigkeit gesteuert. Jede produzierte Pleuelstange erhält eine Identifikationsnummer und im Falle einer Fehlfunktion kann ihre Rückmeldung leicht eingeholt werden.

Biyel kolları tek tek ölçü, sertlik ve yüzey pürüzlülük kontrolü yapılmaktadır. Üretilen her biyel kolu kimliklendirilerek herhangi bir aksaklıkta geri dönüşümü kolayca yapılabilir.

Cracked-type connecting rods are produced to prevent wear of connecting rod-cap connection surfaces, especially in high-torque vehicles, and to be long-lasting.

Connection points between rod and cap have hundreds of surfaces. Thus, the cap and rod surfaces deteriorate less and the engine life is prolonged. As a matter of fact, the cap mouths, which were designed as flat in the past, were later produced with milling.

Finally, cracked type connecting rods have been the choice of all engine manufacturers and designers.

Gebrochene Pleuel werden hergestellt, um den Verschleiß der Pleuelkappen-Verbindungsflächen, insbesondere bei Fahrzeugen mit hohem Drehmoment, zu verhindern und um eine lange Lebensdauer zu gewährleisten.

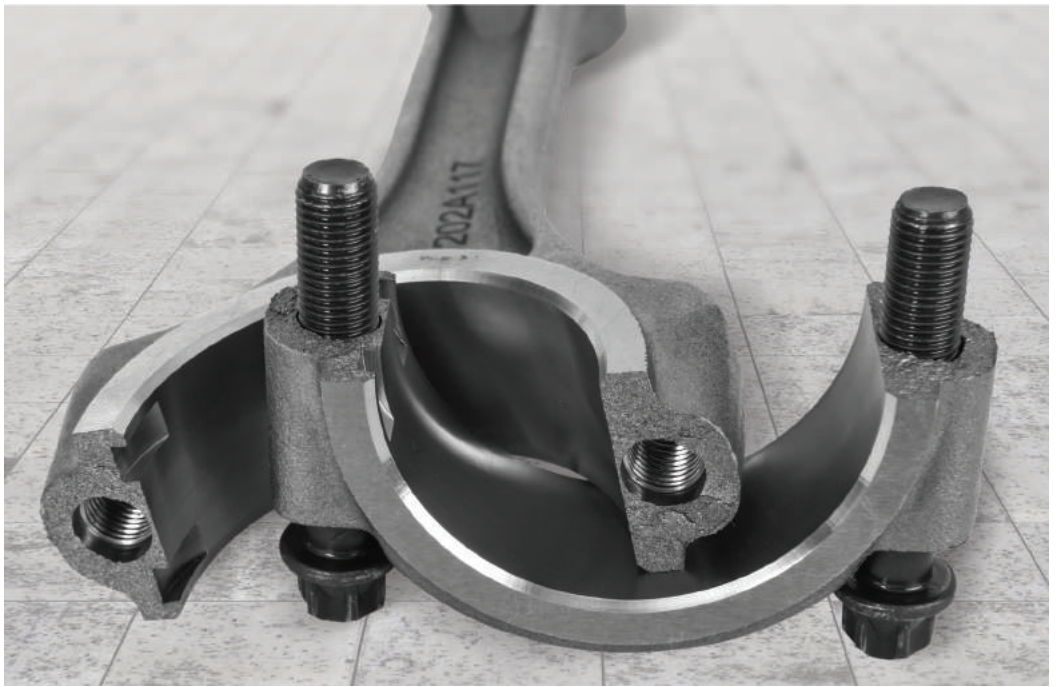
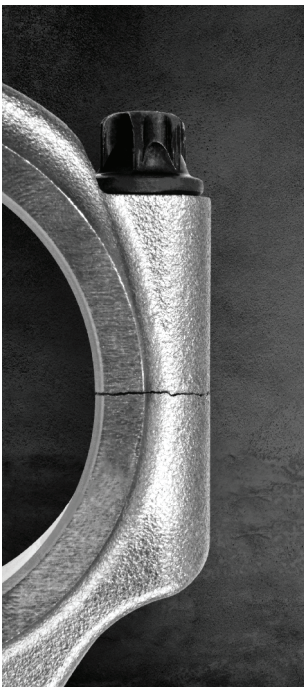
Verbindungspunkte zwischen Stange und Kappe haben Hunderte von Oberflächen. Dadurch verschlechtern sich die Oberflächen der Kappe und der Stange weniger und die Lebensdauer des Motors wird verlängert. Tatsächlich wurden die Kappenmündungen, die in der Vergangenheit als flach ausgelegt waren, später durch Fräsen hergestellt.

Schließlich waren gerissene Pleuel die Wahl aller Motorenhersteller und -konstrukteure.

Kırma tip biyel kolları, özellikle yüksek torklu araçlarda biyel-kep bağlantı yüzeylerinin aşınmaması ve uzun ömürlü olması için üretilmektedir.

Kol ve kep arasındaki bağlantı noktaları, yüzlerce yüzeye sahiptir. Böylelikle, kep ve kol yüzeyleri daha az bozulmakta, motor ömürleri uzamaktadır. Nitekim önceleri düz olarak tasarlanan kep ağızları, sonradan frezeli olarak üretilmiştir.

En nihayetinde kırma tip biyel kolları bütün motor üretici ve tasarımcısı firmaların tercihi olmuştur.

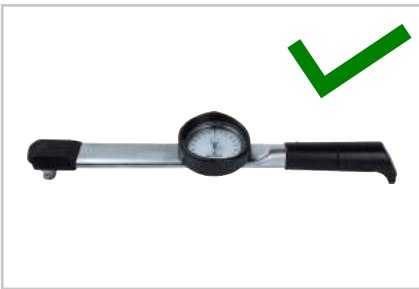
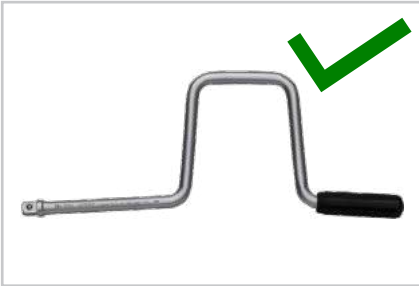




Garanti Bilgilendirme Formu



Warranty Notice Form



Montage Instructions

Please check the product you ordered by comparing informational labels on the box.

Although normally there is no problem with their weights, it is recommended to check their weights before assembly. For the products out of weight tolerance range, please contact BMY.

Connecting rod bolts should be torqued according to the values determined by Engine Manufacturer Company. It is recommended to oil connecting rod bolts during montage and high-pressure screwing tools must not be used.

While assembling rod bearings, attention should be paid to the lug location directions and identical numbers on the rod parts. The cracked-type rods without lug should be assembled by carefully fitting each other and by paying attention to the production numbers on each sides.

Montageanleitung

Bitte überprüfen Sie das von Ihnen bestellte Produkt, indem Sie die Informationsetiketten auf der Verpackung vergleichen. Obwohl normalerweise kein Problem mit den Gewichten besteht, wird empfohlen, die Gewichte vor dem Zusammenbau zu überprüfen.

Für Produkte außerhalb des Gewichtstoleranzbereichs wenden Sie sich bitte an BMY. Die Pleuelschrauben sollten ein Drehmoment gemäß den von der Engine Manufacturer Company festgelegten Werten aufweisen. Es wird empfohlen, die Pleuelschrauben während der Montage zu ölen, und es dürfen keine Hochdruck-Schraubwerkzeuge verwendet werden.

Bei der Montage der Pleuel-Stangenlager sollten die Richtungen der Lugposition und die identischen Nummern auf den Pleuel-Stangenteilen beachtet werden. Die gerissenen Pleuel-Stangen ohne Ansatz sollten zusammengebaut werden, indem sie sorgfältig zusammengefügt werden und die Produktionsnummern auf jeder Seite beachtet werden.

Montaj Kılavuzu

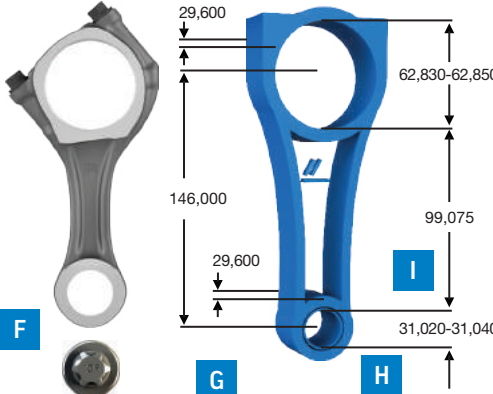
Kutu üzerindeki bilgilendirici etiketle istediğiniz ürünü karşılaştırarak kontrol ediniz.

Ürünlerde ağırlık problemi olmamasına rağmen montajdan önce ağırlık kontrolünün yapılması tavsiye edilir. Ağırlıkları toleransların dışında olan ürünler için BMY ile iletişime geçiniz.

Bağlantı saplamaları motor üretici firmanın belirlediği veya BMY Katalogundaki değerlere göre torklanmalıdır. Bağlantı saplamaları montajlanırken yağlanması tavsiye edilir ve kesinlikle yüksek hava basınçlı sıkma aletleri kullanılmamalıdır.

Kol yataklarının montajında tırnak yeri yönlerine ve kol üzerinde ki eş imalat numaralarına dikkat edilmelidir. Tırnak yeri olmayan kırma tip piston kollarında üretim numarasına dikkat edilerek, kırık yüzeyler birbirine dikkatlice geçirilerek montajlanmalıdır.

Perno ölçülerine ve temizliğine montajdan önce dikkat edilmelidir.

Engine Type	Models	Picture	Sizes (mm)	Products	BMV Reference
1					
A Iveco - Fiat F1AE	Iveco Daily Fiat Ducato UAZ Patriot		J Connecting Rod STD - Tapered	BMV1405 1 pc.30x12x6cm	P
B 2.3 cc	Karsan Jest/J10		K Connecting Rod SEMI - Tapered	BMV1405SEMI 1 pc.30x12x6cm	Q
C R4	E		L Bushing Bimetal Locked-Straight	BMV1405B 4 pcs. 10x6x4cm	R
			M Bolt - 10.9 M10x1,25 L: 49	BMV1405CB 8 pcs. 10x6x4cm	S
			N Con. Rod OEM :504 341 501 504 057 276		
D			1140gr Torque : 80Nm 2nd Torque Option : 40Nm+60 °	  	T

A	Engine Type Motortyp Motor Tipi	K	Connecting Rod SEMI - Un-bored Con. Rod Bushing Connecting Rod SEMI - Un-bohren Bushing SEMI - Kol Burcunun içi işlenmemiş
B	Engine Capacity Hubraum Motor Hacmi	L	Type of Bushing Art der Buchse Kol Burcunun Tipi
C	Number of Cylinders - Array Anzahl der Zylinder - Array Silindir Sayısı - Dizilimi	M	Sizes and Specification of Bolt Größen und Spezifikation der Schraube Cıvatanın ölçüleri - kalitesi
D	Fuel Type / Vehicle Types Kraftstoff / Fahrzeugtypen Yakıt Türü / Araç Tipleri	N	Cross Numbers of Products Kreuz Anzahl der Produkte Ürünlerin Eşdeğer Numuneleri
E	Using Manufacture Models Fahrzeugmodelle Kullanan Araç Modelleri	O	Name of Engine Manufacturer Name des Motorenherstellers Motor Üreticisi
F	Picture of Con. Rod and Bolt Bild von Pleuel und Bolzen Piston Kolu ve Cıvata Resmi	P	Reference of Connecting Rod In-box quantity - Box Sizes Referenz der Pleuelstange In-Box Menge - Box Größen Piston kolu Referansı Kutu içi miktarı - Kutu Ebatları
G	Weight of Connecting Rod Gewicht der Pleuelstange Piston Kolu Ağırlığı	Q	Reference of SEMI Connecting Rod In-box quantity - Box Sizes Referenz der SEMI Pleuelstange In-Box Menge - Box Größen SEMI Piston kolu Referansı Kutu içi miktarı - Kutu Ebatları
H	Bolt Torque Bolzen-Drehmoment Cıvata Torku	R	Reference of Bushing - In-box quantity - Box Sizes Referenz der Buchse - In-Box-Menge - Box Größen Kol Burcu Referansı - Kutu içi miktarı - Kutu Ebatları
I	Basic Product Dimensions Produktabmessungen Ürün Ölçüleri	S	Reference of Bolt - In-box quantity - Box Sizes Referenz der Schrauber - In-Box-Menge - Box Größen Cıvata Referansı - Kutu içi miktarı - Kutu Ebatları
J	Connecting Rod STD - Milled Con. Rod Bushing Connecting Rod STD - Gefräste Con. Rod Bushing Connecting Rod STD - Kol Burcunun içi işlenmiş	T	Structure of Connecting Rod Type of Connecting Rod Shape of Small End Struktur der Pleuelstange Art der Pleuelstange Form des kleinen Endes Piston Kolu Yapısı Piston Kolu Türü Perno Yeri Kesiti

INDEX



INHALTSVERZEICHNIS

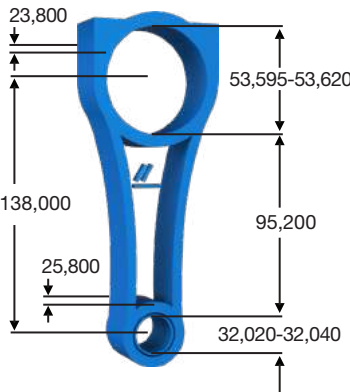
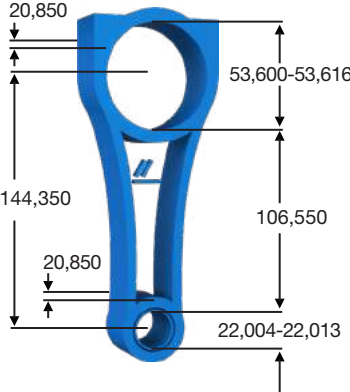
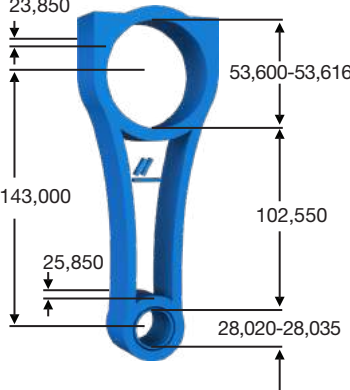
ÜRETİCİ LİSTESİ

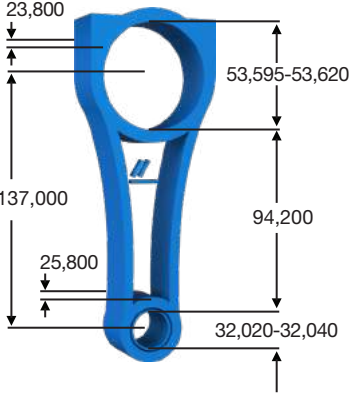
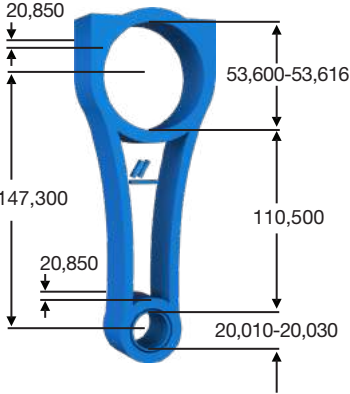
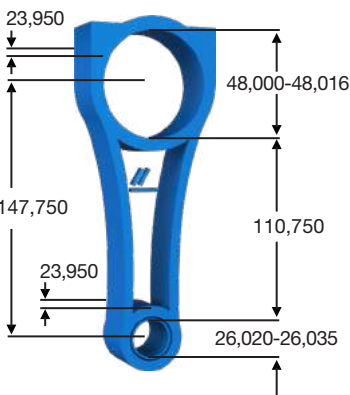
A	ALFA ROMEO	15
	AUDI	61
B	BMW	12
	BUICK	46
C	CHEVROLET	46
	CHRYSLER	46
	CITROEN	51
D	DETROIT DIESEL	Mercedes-Benz 38
	DEUTZ	67
	DS	51
F	FIAT	15
	FORD	19
G	GM	46
H	HYUNDAI	24
I	ISUZU	26
	IVECO	29
J	JAGUAR	32
	JEEP	15
	JENBACHER	31
K	KARSAN	Isuzu 27 Iveco 29
	KIA	24
L	LANCIA	15
	LAND ROVER	32
	LOTUS	GM Opel 46
M	MAZDA	FORD 21 PSA 52
	MASERATI	FCA 17
	MERCEDES-BENZ	34
	MINI	12
	MITSUBISHI	49
	MTU	Mercedes-Benz 38
N	NISSAN-INFINITI	42
O	OPEL	46
P	PERKINS-MASSEY FERGUSON	49
	PEUGEOT	51
	PORSCHE	50
R	RENAULT	55
	RAM	FCA 17
S	SAAB	GM Opel 46
	SEAT	61
	SKODA	61
T	TATA	Fiat 15
	TOYOTA - LEXUS	60
V	VAUXHALL	46
	VOLVO	PSA 53 Renault 56
	VOLKSWAGEN	61
	VM	FCA 17

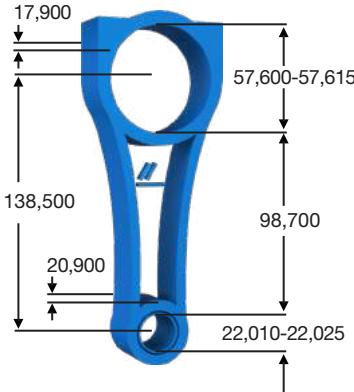
All manufactures names, numbers and descriptions only are shown for reference. It doesn't mean that these products are original. The products that indicated in the catalog are aftermarket spare parts and made in Turkey.

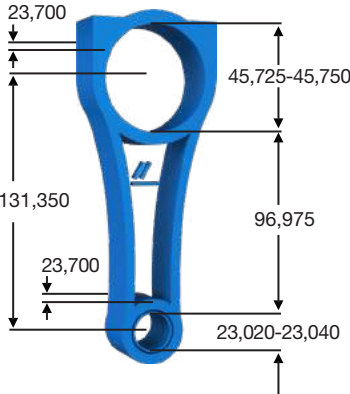
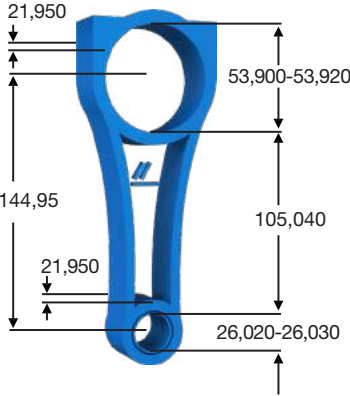
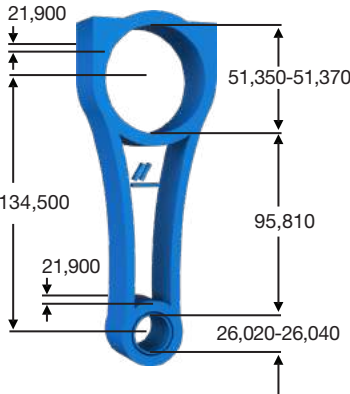

Alle Herstellernamen, -nummern und -beschreibungen werden nur als Referenz angezeigt. Das bedeutet nicht, dass diese Produkte original sind. Bei den im Katalog angegebenen Produkten handelt es sich um Ersatzteile für den Aftermarket, die in der Türkei hergestellt werden.

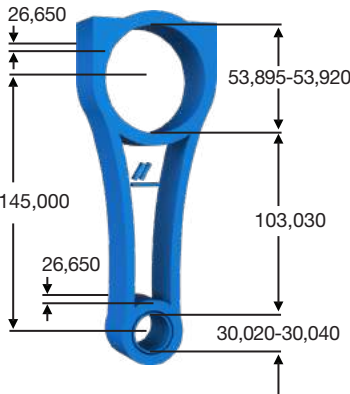
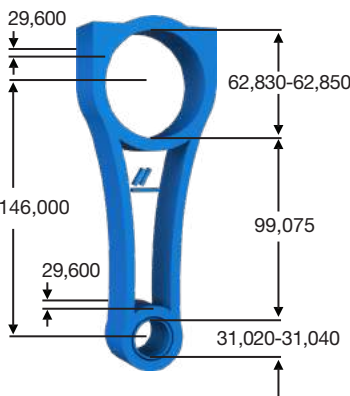

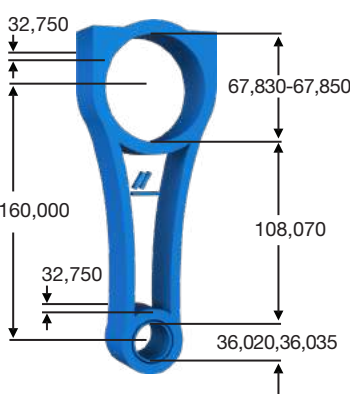
Katalogda belirtilen tüm üretici isimleri, numaraları ve açıklamaları sadece referans olarak gösterilmiştir. Bu bilgiler ürünlerin orijinal olduğu anlamına gelmez. Katalogda belirtilen ürünler satış sonrası yedek parçalarıdır ve Türkiye'de üretilmektedir.

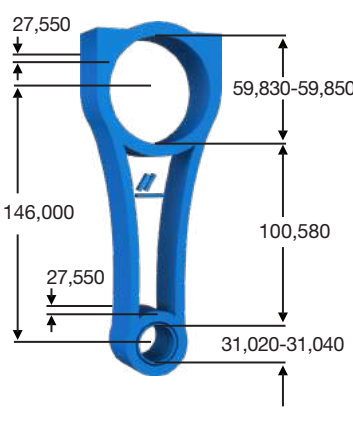
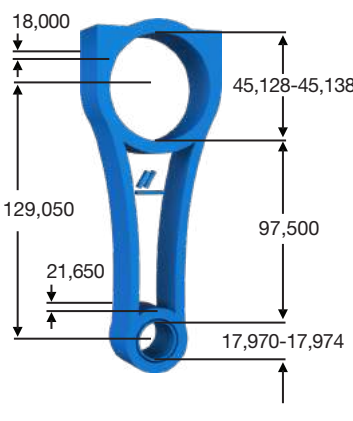
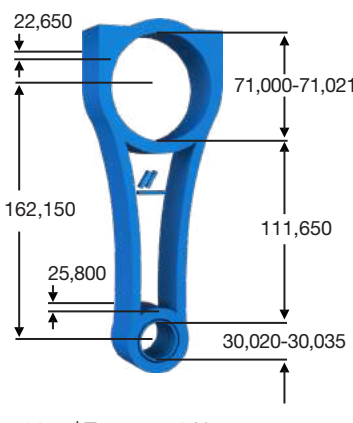
Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
1 BMW N47 D20A/B N47S N57 D30 A/B/D OL/TOP N57 306 D2/D3 N57N 306 D2/ D3/D5 B47 D20 A/B B57 D30 A/B/C	BMW 320d, 325d, 330d, 430d, 520d, 525d, 530d, 550d, 640d, 730d, X3, X4, X5, X6 E81, E82, E83, E87, E88, E90, E91, E92, E60, E61, F10, F30, F01, F02, F03, F31, F32, F33, F36, F11, F45, F20, F22, F26, F40, F56, G01, G02, G11, G15, G20, G30, G31, G32		 720 gr Torque : 70 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L: 46 mm Con. Rod OEM : 11247807345, 11248508023	BMY1701 1 pc.24x10x4cm BMY1701SEMI 1 pc.24x10x4cm BMY1701B 4 pcs.10x6x4cm
  				  	
2 BMW N20, B20, A/B/C/D N26/ B20 A R4 BMW N52/N B30 A/AE/B/BE/BF N53 B30 /A N55 B30 A R6	BMW 120i, 125i, 130i, 135i, 220i, 228i, 320i, 328i, 330i, 335i, 420i, 428i, 430i, 435i, 520i, 530i, 535i, 640i, 740i, X1, X3, X4, X5, X6, Z4, xDrive, sDrive, ActiveHybrid F10, F11, F15, F20, F21, F22, F23, F25, F30, F31, F34, F36, F80, E84, F87		 575 gr Torque : 60 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L: 46 mm Con. Rod OEM: 11247624616, 11247624615, 11247589540	BMY1702 1 pc.24x10x4cm BMY1702SEMI 1 pc.24x10x4cm BMY1702B 4 pcs. 10x6x4cm
   				  	
3 BMW/MINI/Alpina N47 C20 A N47 D20 C B47 C20 U0 Forging No: 543 2.0 cc R4	F45, F48, F54, F30, G20 X1, 218d, 120d, 320d MINI Clubman, Countryman, Clubvan, Coupe, Cooper		 684 gr Torque : 60 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L: 46 mm Con. Rod OEM: 11247812640	BMY1703 1 pc.24x10x4cm BMY1703SEMI 1 pc.24x10x4cm BMY1703B 4 pcs.10x6x4cm
  				  	

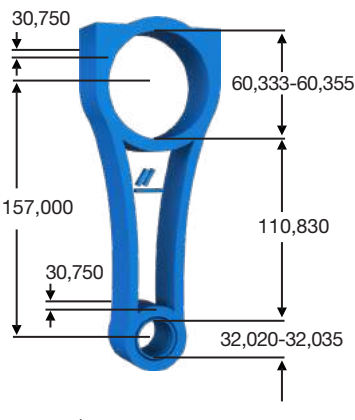
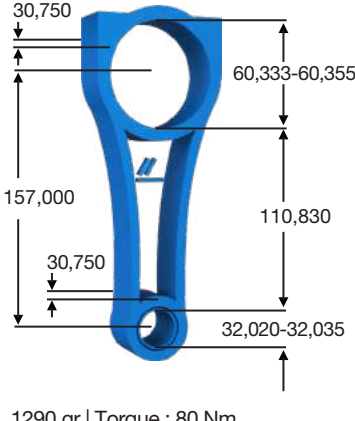
Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
4 BMW N57 D30 S1 N57S N57 D30 C Tri-Turbo 3.0 cc	F01, F02, F10, F11, F15, F16 E70, E71 750dX, 750LdX, X5 M50dX, X6 M50dX, M550dX		 23,800 53,595-53,620 137,000 25,800 94,200 32,020-32,040 710 gr Torque : 60 Nm	Connecting Rod STD Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L: 46 mm	BMY1704 1 pc.24x10x4cm BMY1701B 4 pcs. Con. Rod OEM: 11248506122
  			  		
5 BMW N43B20 Forging Number: 543 2.0cc R4	E81, E82, E87 E88, E90, E91 E93, E60, E61 116i, 118i, 120i 318i, 320i 520i		 20,850 53,600-53,616 147,300 20,850 110,500 20,010-20,030 495gr Torque : 70Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L: 46 mm	BMY1705 1 pc.24x10x4cm BMY1705SEMI 1 pc.24x10x4cm BMY0808B 4 pcs. 10x6x4cm Con. Rod OEM: 11247589533
 			  		
6 BMW/MINI N47 C16 N47 D16 Toyota 1WW Forging Number: 546 1,6 cc R4	F20 114d, 116d Cooper D Toyota Auris, Avensis, Verso		 23,950 48,000-48,016 147,750 23,950 110,750 26,020-26,035 600 gr Torque : 60 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L: 46 mm	BMY1706 1 pc.24x10x4cm BMY1706SEMI 1 pc.24x10x4cm BMY1706B 4 pcs. 10x6x4cm Con. Rod OEM: 11247812641
 			  		

Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
7 BMW / Alpina N63 N N63 B44 S63 B44 Forging Number: 22 Land Rover P530 4.4 cc V8	X5, X6, 750i, 750Li, 550i, M550i, 650i /xDDrive /M E70, E71, F01, F02, F06, F07, F10, F11, F12, F13, F15, F16, F85, F86, F90, F91, F95, F96, G05, G06, G07, G11, G12, G14, G15, G16, G30, G31 Range Rover/ Sport L460 /L461	 580 gr Torque : 70 Nm	17,900 57,600-57,615 138,500 20,900 98,700 22,010-22,025	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L: 46 mm Con. Rod OEM: 11247646892	BMJ1707 1 pc.24x10x4cm BMJ1707SEMI 1 pc.24x10x4cm BMJ1707B 4 pcs. 10x6x4cm
				 FORGE CRACKED TAPERED	
8 BMW N20B16 Forging Number: 13 1.6cc R4	F10 Facelift G30, G20 E84 F23 520i 320i X1 16i X3 18i	 595 gr Torque : 60 Nm	20,850 53,600-53,616 153,300 20,850 115,500 22,004-22,013	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L: 46 mm Con. Rod OEM: 11 24 8 610 991	BMJ1708 1 pc.24x10x4cm BMJ1708SEMI 1 pc.24x10x4cm BMJ1708B 4 pcs. 10x6x4cm
				 FORGE CRACKED TAPERED	
9 BMW - MINI N13 B16 N14 B16 N18 B16 PSA EP6, EP6DT, EP8CDTX 1.6 cc R4	BMW 114i, 116i, 118, 316i, 320i Efficient Dynamics Edition F20, F30 MINI Cooper Peugeot 207, 208, 2008, 308, 3008, 508 Citroën C4, DS3, DS4, C3	 465 gr Torque : 45 Nm 2nd Torque Option : 5 Nm + 15 Nm + 130 °	20,850 47,995-48,020 138,550 20,850 104,530 20,020-20,040	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M7x1 L: 38 mm Con. Rod OEM 11247621253 BMW 0603 96, 161 366 51 80 PSA	BMJ0808 1 pc.24x10x4cm BMJ0808SEMI 1 pc.24x10x4cm BMJ0808B 4 pcs.10x6x4cm BMJ0806CB 8 pcs.10x6x4cm
				 FORGE CRACKED TAPERED	

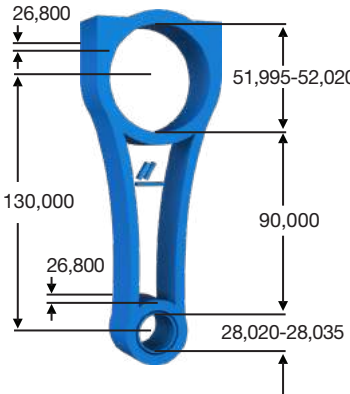
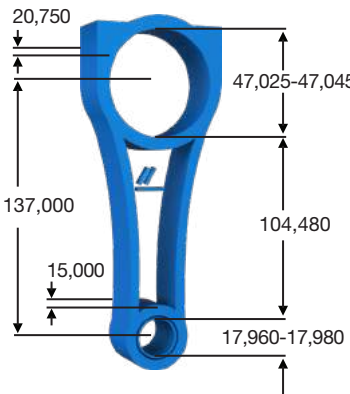
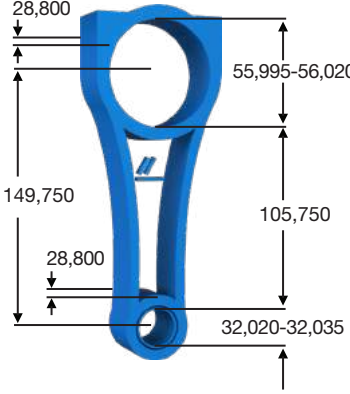
Engine Type	Models	Picture	Sizes (mm)	Products	BMV Reference
1 Fiat 1.3 JTD 169 A1, 169 A5, 188 A8, 188 A9. 199 A1, 199 A2, 199 A3, 199 A9, 199 B1 Euro 5, 199 B2 Euro 5, 199 B4, 223 A9, 225 A2, 263 A2 Euro 5, 263 A6 312 A8.000 Euro 6, 312 B1, 312 B2 Euro 6, 312 B5, 330 A1, 55266963, 55283775, 955 B2 1.3 cc R4	Fiat Albea, Doblò, Fiorino, Grande Punto, Linea, 500, Palio, Panda, Punto Alfa Romeo, MiTo Lancia Musa, Ypsilon Suzuki Swift, SX4, Splach TATA Indica Vista, Manza		 450 gr Torque : 45 Nm 2nd Torque Option : 20 Nm + 40 °	Connecting Rod STD BMV1401 1 pc.24x10x4cm Connecting Rod SEMI BMV1401SEMI 1 pc.24x10x4cm Bushing Bimetal Locked-Straight BMV1401B 4 pcs.10x6x4cm Bolt - 10.9 M8x1 L: 38 mm BMV1401CB 8 pcs.10x6x4cm Con. Rod OEM : 735 012 29, 552 086 24	
					
2 Fiat 1.9 D JTD 182.B9, 188 A2, 939 A2, 192.A5, 192 B1, 932 A2, 937 A1, 937 A2, 937 A3, 937 A4, 937 A5, 937 A6, 937 A7, 937 A8, 939 A1, 939 A2, 939 A7, 939 A8, AR 32302 AR 37101 Opel Z19DT/H 1.9 cc R4	Alfa Romeo 146,147,159,GT Cadillac BLS Fiat Doblo, Bravo, Punto Fiat Croma, Marea, Stilo Lancia Delta, Lybra, Musa Opel Signum, Vectra C, Zafira B Saab 9-3, 9-5, Suzuki SX4		 760 gr Torque : 60 Nm	Connecting Rod STD BMV1402 1 pc.24x10x4cm Connecting Rod SEMI BMV1402SEMI 1 pc.24x10x4cm Bushing Bimetal Locked-Straight BMV1402B 4 pcs.10x6x4cm Bolt - 10.9 M9x1 L: 46 mm Con. Rod OEM : 467 689 51	
					
3 Fiat 1.6 JTD 198 A2, 198 A3, 198 A6, 199 B5, 263 A4, 940 A3, 263 A3 Euro 5, 263 A7/A8/A9 350 A2/A3, 955 A3, 844 A3, 944 A3, 955 A4 1.6 cc R4	Alfa Romeo Mito, Giulietta Fiat 500L, Bravo, Doblò, Fiat Grande, Punto, Idea, Fiat Egea, Tipo, Fiat Linea Jeep Renegade Lancia Delta, Musa Opel Combo D Suzuki Vitara, SX4 S-Cross		 645 gr Torque : 60 Nm	Connecting Rod STD BMV1403 1 pc.24x10x4cm Connecting Rod SEMI BMV1403SEMI 1 pc.24x10x4cm Bushing Bimetal Locked-Straight BMV1403B 4 pcs.10x6x4cm Bolt - 10.9 M9x1 L: 46 mm Con. Rod OEM : 552 288 71	
					

Engine Type	Models	Picture	Sizes (mm)	Products	BMV Reference
4 Fiat 2.0 JTD 263A1 D20AA B182 B900, Euro 5, 844 A2, 939 B3, 939 B4, 940 A4, 940 A7 Euro 5, 940 A8 Euro 5, 198 A5, 198 A5, 250 A1 Euro 5, 250 A2, 263 A1 Euro 5, 844 A2, 939 B5, 198 A5, 844 A2 Opel/Vauxhall A20DTC, A20DTH, A20DTJ, A20DTL, Y20DTJ, Z20DTJ 2.0 cc R4	Fiat Freemont, Doblo, Bravo Lancia/Chrysler Delta Alfa Romeo Brera, Spider, 159, Giulietta Opel Insignia, Astra		 740 gr Torque : 60 Nm 2nd Torque Option : 25 Nm + 60 °	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L: 46 mm Con. Rod OEM: 55198189 With Bearing Lug (for without Lug BMV1504)	BMV1404 1 pc.24x10x4cm BMV1404SEMI 1 pc.24x10x4cm BMV1504B 4 pcs.10x6x4cm BMV0805B 8 pcs.10x6x4cm
					
5 Fiat - Iveco 2.3 JTD F1AE 2.3 cc R4	Fiat Ducato Iveco Daily UAZ Patriot Karsan Jest/J10		 1140 gr Torque : 80 Nm 2nd Torque Option : 40 Nm + 60 °	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M10x1,25 L: 49 Con. Rod OEM : 504 341 501 504 057 276	BMV1405 1 pc.30x12x6cm BMV1405SEMI 1 pc.30x12x6cm BMV1405B 4 pcs.10x6x4cm BMV1405CB 8 pcs.10x6x4cm
					
6 Fiat - Iveco 3.0 JTD F1CE Mitsubishi 4P10-7AT/T2/ T4/T6 3.0 cc R4	Fiat Ducato Iveco Daily, Massif Citroen Jumper Mitsubishi Fuso Canter 8B/9BL		 1340 gr Torque : 80 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M10x1,25 L:49 mm Con. Rod OEM : 504 341 496	BMV1406 1 pc.30x12x6cm BMV1406SEMI 1 pc.30x12x6cm BMV1406B 4 pcs.10x6x4cm
					

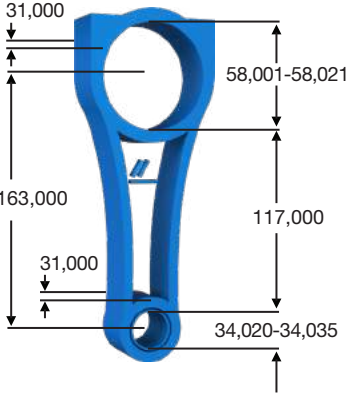
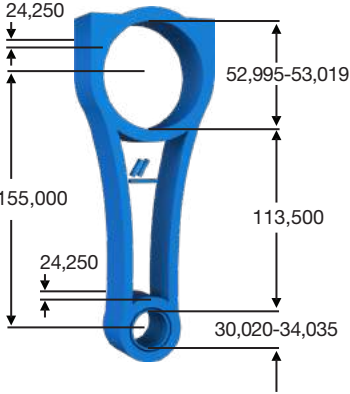
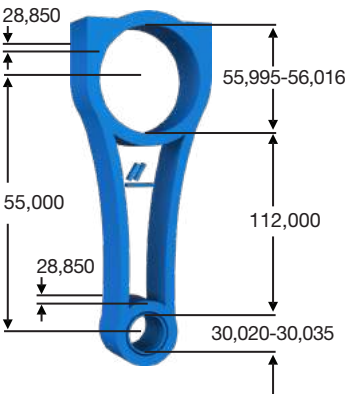
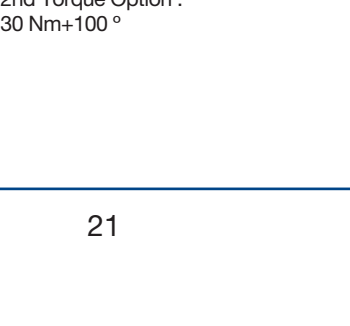
Engine Type	Models	Picture	Sizes (mm)	Products	BMV Reference
7 Fiat-Iveco F1AF-F1AG 2.3 cc R4 Euro 6	Fiat Ducato, Iveco Daily		 985 gr Torque : 60 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L:46 mm	BMV1407 1 pc.30x12x6cm BMV1407SEMI 1 pc.30x12x6cm BMV1407B 4 pcs.10x6x4cm BMV0805CB 8 pcs.10x6x4cm Con. Rod OEM :5801841535, 5801842210, 5802116073
  				  	
8 Fiat/Alfa Romeo/ Dodge 169.A3, 192.B2, 198.A1, 198.A4, 198.A7, 199.A6, 199.A7, 199.A8, 312.A1, 843 A1, 350 A1, 940.B7, 955.A2, 955.A6, 955.A8, 955.A9, 178.F3, 310.A2, EAF 55263623, 55263624 1.4 cc R4	Fiat Punto, 500, 500C, 500L, 500X, Doblo, Tipo, Ideo, Stilo, Egea, 124 Spider, Brava Alfa Romeo Mito, Giulietta Dodge Dart		 408 gr Torque : 45 Nm 2nd Torque Option : 20 Nm + 40 °	Connecting Rod STD - Tapered Connecting Rod SEMI - Tapered Bushing Bimetal Locked-Straight Bolt - 10.9 M8x1 L: 38 mm	BMV1408 1 pc.24x10x4cm BMV1408SEMI 1 pc.24x10x4cm BMV1408B 4 pcs.10x6x4cm Con. Rod OEM : 46743870, 46740345
  				  	
9 VM Motori A630 DOHC, A630HP, L630 Chrysler/Jeep/ Lancia EXF, EXL, EXN, M664 CRD/TD Maserati A630HP, M15746D V6 3.0 (2987) cc	Jeep Grand Cherokee IV (WK, WK2), Commander Chrysler 300 Maserati Ghibli III, Quattroporte VI, Levante Lancia Thema Ram 1500		 720 gr Torque : 70 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L: 50 mm	BMV1409 1 pc.30x12x6cm BMV1409SEMI 1 pc.30x12x6cm BMV1409B 3 pcs.10x6x4cm BMV1409CB 12 pcs.10x6x4cm Con. Rod OEM : 681 472 33AA
  				  	

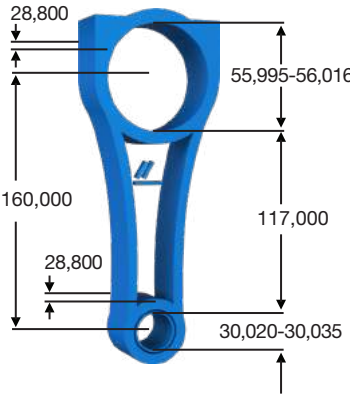

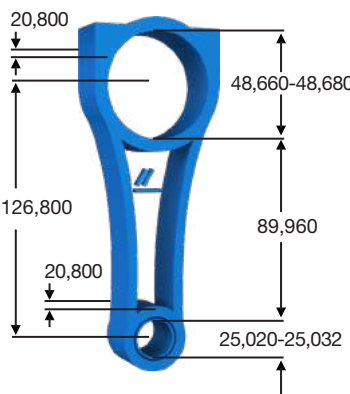
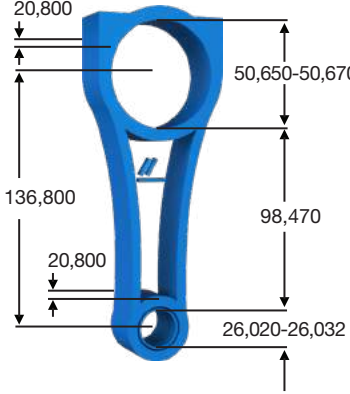
Engine Type	Models	Picture	Sizes (mm)	Products	BMV Reference
10 Fiat Sofim 8140/ S8U,89U 2.5 cc R4	Fiat Ducato, Croma Peugeot Boxer Renault Master, Trafic Lancia Thema		 1320gr Torque : 80 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M10x1,25 L: 58 mm Con. Rod OEM : 7473171	BMV0802 1 pc.24x10x4cm BMV0802SEMI 1 pc.24x10x4cm BMV0803B 4 pcs.10x6x4cm
  				  	
11 Fiat Sofim 8140/ S8W/S9W 2.8 cc R4	Fiat Ducato Iveco Daily Renault Master, Mascott Opel Movano Citroën Jumper Peugeot Boxer		 1290 gr Torque : 80 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M10x1,25 L: 58 mm Con. Rod OEM : 500 352 497	BMV0803 1 pc.24x10x4cm BMV0803SEMI 1 pc.24x10x4cm BMV0803B 4 pcs.10x6x4cm
  				  	

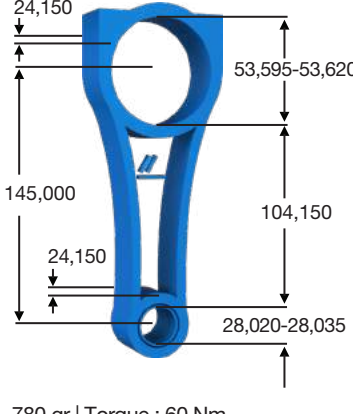

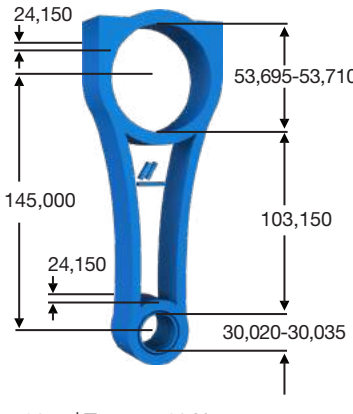

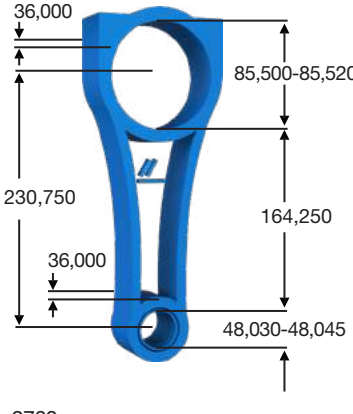
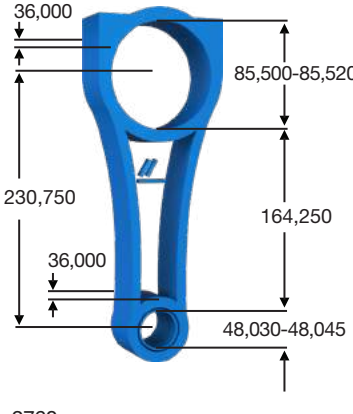



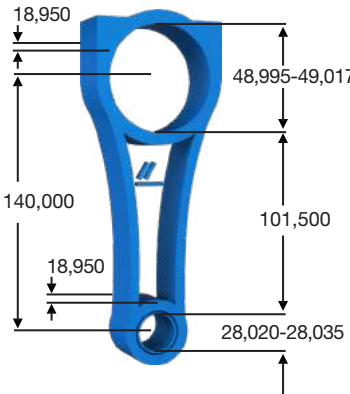
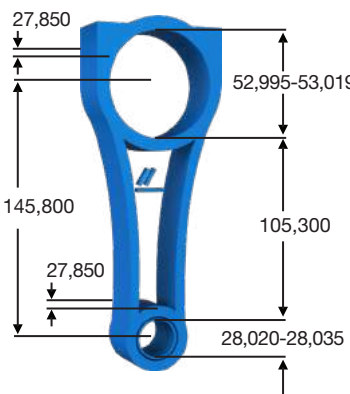
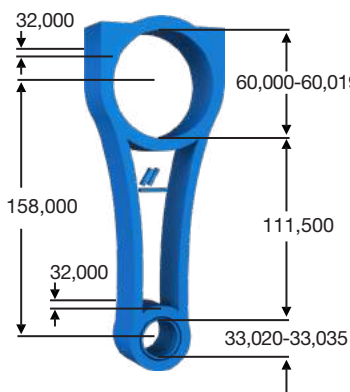
Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
1 Ford HCPA, HCPB, P9PA, P9PC, P9PD, R3PA 90ps RWPD 110ps 1.8 cc R4	Ford Connect, Mondeo		 26,800 51,995-52,020 130,000 26,800 90,000 28,020-28,035 695 gr Torque : 60 Nm 2nd Torque Option : 30 Nm+100 °	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L:46 mm Con. Rod OEM : 1S4Q 6200 BD (FINIS: 1487468)	BMY1101 1 pc.24x10x4cm BMY1101SEMI 1 pc.24x10x4cm BMY1101B 4 pcs.10x6x4cm BMY0805CB 8 pcs.10x6x4cm
  				  	
2 Ford FYJA FYJB FYDA, FYDB, FYDC, FYDD, FYDH, ZETEC 1.6 cc R4	Ford Focus Mondeo C-Max Fusion Mazda 2		 20,750 47,025-47,045 137,000 15,000 104,480 17,960-17,980 400 gr Torque : 50 Nm 2nd Torque Option : 15 Nm + 90 °	Connecting Rod STD Bolt - 10.9 M8x1 L: 38 mm Con. Rod OEM : 98MM 6200 AA (FINIS: 1674827)	BMY1102 1 pc.24x10x4cm BMY0806CB 2 pcs.10x6x4cm
 				  	
3 Ford V184 D2FA H9FA H9FB JXFA 2.4 cc R4	Ford Transit V184		 28,800 55,995-56,020 149,750 28,800 105,750 32,020-32,035 950 gr Torque : 80 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M10 x1,25 L:49 Con. Rod OEM : 5C10 6200 AA (FINIS: 1406170) H Degree	BMY1103 1 pc.24x10x4cm BMY1103SEMI 1 pc.24x10x4cm BMY1103B 4 pcs.10x6x4cm
  				  	

Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
4 Ford ENSA, SAFA, SAFB, SA2R, SA2S, SA2W / 4x4 200ps 3.2 cc R5	Ford Ranger, Transit		 1110 gr Torque : 80 Nm	Connecting Rod STD - Tapered Connecting Rod SEMI - Tapered Bushing Bimetal Locked-Straight Bolt - 10.9 M10 x1,25 L:49 Con. Rod OEM : 7C16 6200 BAB, 7C18 6200 BAA	BMY1105 1 pc.24x10x4cm BMY1105SEMI 1 pc.24x10x4cm BMY1103B 4 pcs.10x6x4cm BMY1105 1 pc.24x10x4cm
5 Ford BCCC, BJFA/B, YLCB, YLDA, YLF6, YLFA/B, YLFS, YMCB, YMF6, YMFA/B, YMFS, YMHA, YMRA, YMR6, YNCA, YNF6, YNFA/B, YNFS, YNRA 2.0 cc - R4 Euro 6	S-Max, Galaxy, Transit Custom, Tourneo Custom V362/V363, Panther C Ranger 4x2, 4x4 FWD, RWD EcoBlue, EcoBlue BiTurbo		 715 gr Torque : 60 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L:46 mm OEM : RFGK206205BA, GK2Q6205BA	BMY1106 1 pc. 24x10x4cm BMY1106SEMI 1 pc. 24x10x4cm BMY1106B 4 pcs.10x6x4cm BMY0805CB 8 pcs.10x6x4cm
6 Ford Ecoboost M1CA/B M1BC, M1DA, M1JA, M1JC/E/H, M2DA M2GA/B, SFCA/B/C/D, SFDA, SFJA/B SFJC/D, XMJA/B, YYJA/B/C/D 1.0 cc R3	B-Max, C-Max II, Ecosport, Fiesta VI, Focus III, Grand C-Max, Mondeo V, Tourneo Connect/ Courier, Transit Connect/ Courier		 390 gr Torque : 45 Nm 2nd Torque Option : 20 Nm + 40°	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M8x1 L:38 mm Con. Rod OEM : CM5G 6205 FA, CM5G 6205 EC	BMY1107 1 pc.24x10x4cm BMY1107SEMI 1 pc.24x10x4cm BMY1107B 4 pcs. 10x6x4cm BMY1401CB 8 pcs. 10x6x4cm

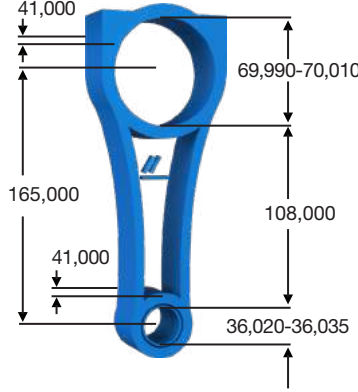
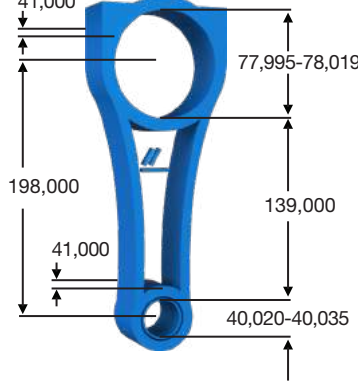
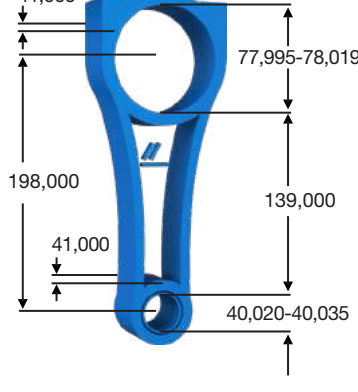
Engine Type	Models	Picture	Sizes (mm)	Products	BMV Reference
7 Ford/Mazda 6M34 WL-C, WLAA 143ps 2.5 cc Ford/Mazda WEC UNY0E3 3.0 cc 2006 - ... R4	Ford Ranger (ET), Everest, Endeavour Mazda BT-50 Pick-Up		 1160 gr Torque : 80 Nm	Connecting Rod STD - Tapered	BMV1108 1 pc.24x10x4cm
				Connecting Rod SEMI - Tapered	BMV1108SEMI 1 pc.24x10x4cm
8 Ford BKFA, BKFB, BKFC, BKFD, BKRA, BKRB EcoBlue Euro 6.2 2.0cc R4	S-Max, Galaxy, Transit Custom, Tourneo Custom V362/V363, Panther C Ranger 4x2, 4x4 FWD, RWD		 740 gr Torque : 60 Nm	Connecting Rod STD	BMV1109 1 pc. 24x10x4cm
				Connecting Rod SEMI	BMV1109SEMI 1 pc. 24x10x4cm
9 Ford CVRA, CVRB, CVRC 155ps, CYFA, CYFB, CYFC, CYRA, CYRB 125ps, DRFA, DRFB, DRFC, DRFF, DRFG, DRF5, 100ps PGFA, PGFB, UHFA, UHFB, UHFC 140ps 2.2 cc R4	Ford Transit, Mondeo Peugeot Boxer Fiat Ducato Citroen Jumper		 882 gr Torque : 60 Nm 2nd Torque Option : 30 Nm+100 °	Connecting Rod STD	BMV0804 1 pc.24x10x4cm
				Connecting Rod SEMI	BMV0804SEMI 1 pc.24x10x4cm
10 Ford CVRA, CVRB, CVRC 155ps, CYFA, CYFB, CYFC, CYRA, CYRB 125ps, DRFA, DRFB, DRFC, DRFF, DRFG, DRF5, 100ps PGFA, PGFB, UHFA, UHFB, UHFC 140ps 2.2 cc R4	Ford Transit, Mondeo Peugeot Boxer Fiat Ducato Citroen Jumper		 882 gr Torque : 60 Nm 2nd Torque Option : 30 Nm+100 °	Connecting Rod STD	BMV0804 1 pc.24x10x4cm
				Connecting Rod SEMI	BMV0804SEMI 1 pc.24x10x4cm

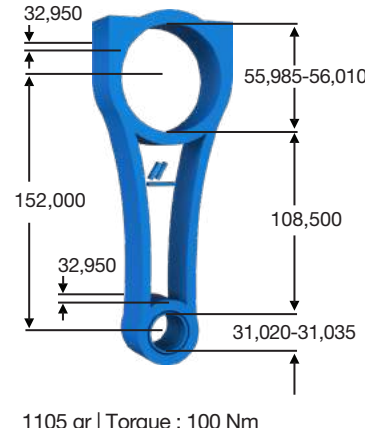
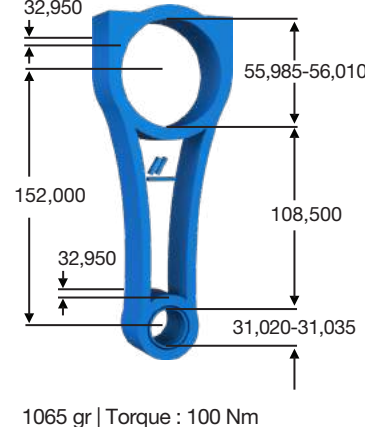
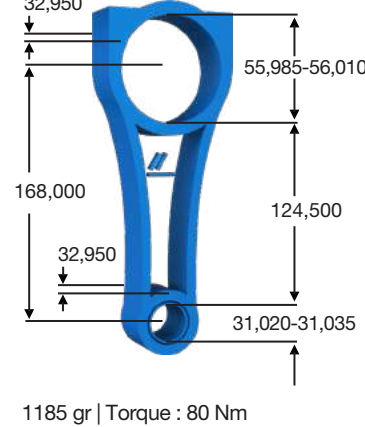
Engine Type	Models	Picture	Sizes (mm)	Products	BMV Reference
10 Ford PGFA, PGFB 140ps P8FA, P8FB 85ps QWFA 130ps QVFA 110ps 2.2 cc R4	Ford Transit, Mondeo Peugeot Boxer Fiat Ducato Citroen Jumper		 873 gr Torque : 60 Nm 2nd Torque Option : 30 Nm+100 °	Connecting Rod STD	BMV0805 1 pc.24x10x4cm
				Connecting Rod SEMI	BMV0805SEMI 1 pc.24x10x4cm
				Bushing Bimetal Locked-Straight	BMV0804B 4 pcs.10x6x4cm
				Bolt - 10.9 M9x1 L:46 mm	BMV0805CB 8 pcs.10x6x4cm
				Con. Rod OEM : 1S7Q 6200 CBA FIN: 1614885, 137616, 1377618, 137620, 1548564	
					
					
11 Ford DLD-414 1.4 cc R4	Ford Fiesta, Fusion Peugeot 206, 207, 1007 Citroen C1, C2, C3, Xsara Mazda 2 Suzuki Liana Toyota Aygo		 500 gr Torque : 45 Nm 2nd Torque Option : 5 Nm + 10 Nm + 130 °	Connecting Rod STD	BMV0806 1 pc.24x10x4cm
				Connecting Rod SEMI	BMV0806SEMI 1 pc.24x10x4cm
				Bushing Bimetal Locked-Straight	BMV0806B 4 pcs.10x6x4cm
				Bolt - 10.9 M7x1 L: 38 mm	BMV0806CB 8 pcs.10x6x4cm
				Con. Rod OEM : 7S6Q 6200 AC FIN: 1509473	
					
					
12 Ford DLD-416 Ford AEDA, UGJA, UGJC 1.5 - 1.6 cc R4	Ford C-Max, Focus, Fiesta Peugeot 207, 307, 308, 407, Partner, 508 Citroen C3, C4, Berlingo MINI Cooper D Mazda 2, 3 Volvo C30, S40, V50/60, S60 Suzuki SX4		 600 gr Torque : 45 Nm 2nd Torque Option : 5 Nm + 10 Nm + 130 °	Connecting Rod STD	BMV0807 1 pc.24x10x4cm
				Connecting Rod SEMI	BMV0807SEMI 1 pc.24x10x4cm
				Bushing Bimetal Locked-Straight	BMV0807B 4 pcs.10x6x4cm
				Bolt - 10.9 M7x1 L: 38 mm	BMV0806CB 8 pcs.10x6x4cm
				Con. Rod OEM : 7M5Q 6200 AD/AE FINIS: 1569495	
					
					

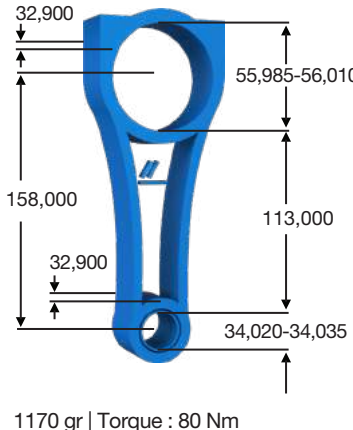
Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
13 Ford Duratorq TDCI AZBA/ AZBC/AZWA/ AZWC/G6DA/ G6DD/G6DE/ G6DG/IXDA/ KLBA/LPBA/ QXBA/QXWB/ QXWC/UFBA 2.0 cc R4	Ford Focus, C-Max, Focus, S-Max, Galaxy, Mondeo, Kuga Peugeot Partner,307, 407, 607, 807, 308, 508 Volvo C30, C70, S40, V50, S80, V70		 780 gr Torque : 60 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L:56 mm Con. Rod OEM : 0603 90 0603 A6 3M5Q 6200 BC	BMY0810 1 pc.24x10x4cm BMY0810SEMI 1 pc.24x10x4cm BMY0810B 4 pcs.10x6x4cm BMY0810CB 8 pcs.10x6x4cm
					
14 Ford - Peugeot DW10CTED4, DW10FUD RHH, RHE, RH02 2.0 cc R4	Peugeot 308, 407, 508, 3008, 5008, RCZ, Partner Citroen C4, C5, DS4, DS5, Berlingo, Jumpy, Xsara Ford Focus, CMax, Transit		 790 gr Torque : 60 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L:46 mm Con. Rod OEM : 0603 C5 1613238180, 9M5Q 6200 AC, 1406651180, 1606651180	BMY0811 1 pc.24x10x4cm BMY0811SEMI 1 pc.24x10x4cm BMY0811B 4 pcs.10x6x4cm BMY0811CB 8 pcs.10x6x4cm
					
15 Ford NHDD, 9.0L EcoTorq Euro 6 9.0 (8974) cc R6	Ford Cargo 1835, 2535, 3235, 1833, 2533, 2633, 3233		 2760 gr	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L:46 mm Con. Rod OEM : 6C46 6205 AB	BMY1151 1 pc.48x15x6cm BMY1151SEMI 1 pc.48x15x6cm BMY1151B 4 pcs.10x6x4cm BMY1151CB 8 pcs.10x6x4cm
					

Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
1 Hyundai - Kia D4FA/B D3FA, D4FC 1.2 - 1.5 cc R3 - R4	Hyundai Era, Accent, Getz, i10, i20, i30 Kia Cerato, Rio Ceed		 557 gr Torque : 45 Nm 2nd Torque Option : 12.7 Nm + 90 °	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M7x1 L: 38 mm	BMYP0601 1 pc.24x10x4cm BMYP0601SEMI 1 pc.24x10x4cm BMYP0601B 4 pcs.10x6x4cm BMYP0806CB 8 pcs.10x6x4cm Con. Rod OEM : 23510 2A701 23510 2A001, 23510 2A600, 23510 2A750
 				  	
2 Hyundai - Kia D3EA - D4EA -D4EB 1.5 - 2.0 - 2.2cc R3 - R4 - R5 Opel-Chevrolet Z20DMH, Z20S, Z20DM 2.0 cc R4	Hyundai Accent, Elentra, Tuscon, Santafe CRDI, i30 Kia Cee'd, Sportage, Cerato Mitsubishi Colt		 885 gr Torque : 50 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M8x1 L: 47mm	BMYP0602 1 pc.24x10x4cm BMYP0602SEMI 1 pc.24x10x4cm BMYP0602B 4 pcs.10x6x4cm Con. Rod OEM : 23510 27300 23510 27000, 23510 27010, 23510 27400, 23510 27410, 96440175, 4807976
  				  	
3 Hyundai - KIA Dodge D4CB, D4BC 2.5 CRDI R4	Hyundai H350, H100, H1, Porter, Starex Kia Bongo, K2500, Sorento Dodge H100		 1188gr Torque : 80 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M10x1,25 L: 49mm	BMYP0603 1 pc.24x10x4cm BMYP0603SEMI 1 pc.24x10x4cm BMYP0603B 4 pcs.10x6x4cm Con. Rod OEM : 23510-4A000, 235104A500, 235104A710
   				  	

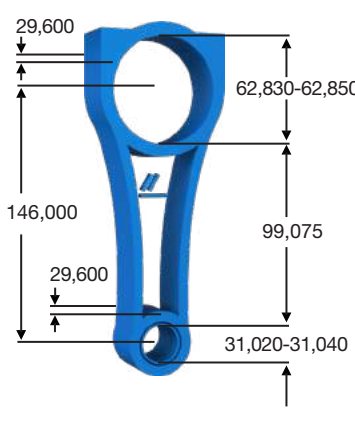
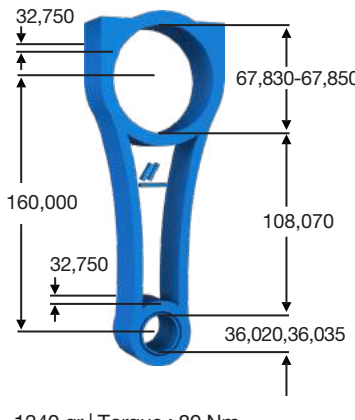
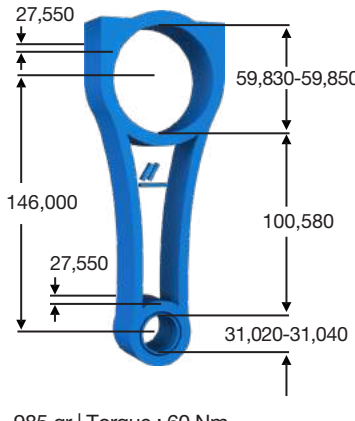
Engine Type	Models	Picture	Sizes (mm)	Products	BMV Reference	
4 Hyundai/Kia G4LC 1.4 cc R4 G3LA/B3LA 1.0cc R4	i10, i20, i30, Accent, Solaris, HB20 Picanto, Rio, Ceed, Stonic,		 285 gr Torque : 45Nm 2nd Torque Option : 12.7Nm+90°	Connecting Rod STD Bolt - 10.9 M7x1 L: 38mm Con. Rod OEM : 23510-04010, 23510-04030	BMV0604 1 pc.24x10x4cm BMV0806CB 8 pcs.10x6x4cm	
5 Hyundai D4BF, D4BB, D4BH Mitsubishi 4D55T, 4D56 2.5 cc R4	Hyundai Starex/ H100 Mitsubishi L200/300		 1040 gr Torque : 60 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L:46 mm Con. Rod OEM : MD371001 23510 42010	BMV1303 1 pc.24x10x4cm BMV1303SEMI 1 pc.24x10x4cm BMV1303B 4 pcs.10x6x4cm	
6 Hyundai - Mitsubishi 4D56U 4D56T 2.5 cc R4	Hyundai H100 (2015-...) Mitsubishi L200/300		 1040 gr Torque : 60 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L: 46 mm Con. Rod OEM : 1115 A345	BMV1305 1 pc.24x10x4cm BMV1305SEMI 1 pc.24x10x4cm BMV1305B 4 pcs.10x6x4cm	

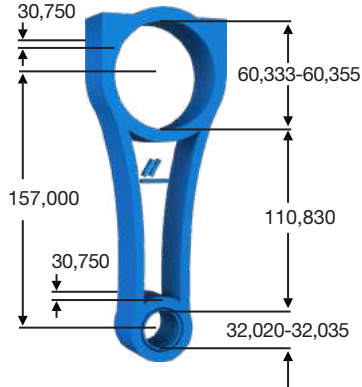

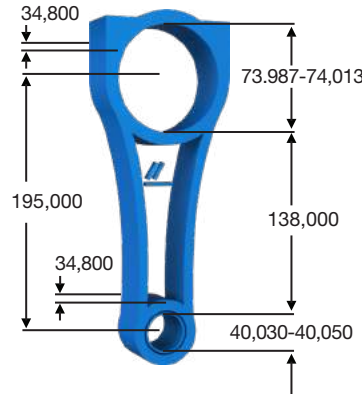

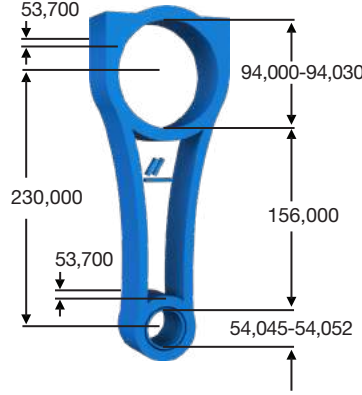

Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
1 Isuzu 4HF1 4.3 cc R4   	NKR66, NPR66, Champion MD23, MD25, MD27		 1750 gr Torque : 140 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M13x1,25 L:58 Con. Rod OEM : 897135032351	BMY0401 1 pc.30x12x6cm BMY0401SEMI 1 pc.30x12x6cm BMY0401B 4 pcs.10x6x4cm FORGE  CRACKED  TAPERED 
2 Isuzu 4HE1-T 4.7 cc R4    	NQR, NQR3D, NPR, NPS4x4, Turkuaz, Euro II/ III		 1950 gr Torque : 140 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 12.9 M13x1,25 L: 57 Con. Rod OEM: 8943917911, 898018425251	BMY0402 1 pc.30x12x6cm BMY0402SEMI 1 pc.30x12x6cm BMY0402B 4 pcs. 10x6x4cm BMY0402CB 8 pcs. 10x6x4cm FORGE  CRACKED  TAPERED 
3 Isuzu 4HK1-6HK1-TCS 5.2 cc R4 - R6    	NQR86, Turkuaz Euro III/IV C.Rail		 1950 gr Torque : 140 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 12.9 M13x1,25 L: 57 Con. Rod OEM : 894399661251	BMY0403 1 pc.30x12x6cm BMY0403SEMI 1 pc.30x12x6cm BMY0402B 4 pcs. 10x6x4cm BMY0402CB 8 pcs. 10x6x4cm FORGE  CRACKED  TAPERED 

Engine Type	Models	Picture	Sizes (mm)	Products	BMV Reference
4					
Isuzu 4JA1	TFR54, Cameo, Panther, Wizard,		 1105 gr Torque : 100 Nm	Connecting Rod STD	BMV0405 1 pc.24x10x4cm
2.5 cc				Connecting Rod SEMI	BMV0405SEMI 1 pc.24x10x4cm
R4	Opel Frontera			Bushing Bimetal Locked-Straight	BMV0405B 4 pcs.10x6x4cm
				Bolt - 12.9 M11x1,25 L: 58 mm	Con. Rod OEM : 8943331190
   		  			
5					
Isuzu 4JA1-T/C	D-Max Pick Up 4x2/4x4, Cameo, Panther, Wizard,		 1065 gr Torque : 100 Nm	Connecting Rod STD	BMV0406 1 pc.24x10x4cm
2.5 cc				Connecting Rod SEMI	BMV0406SEMI 1 pc.24x10x4cm
R4	Opel Frontera			Bushing Bimetal Locked-Straight	BMV0405B 4 pcs. 10x6x4cm
				Bolt - 12.9 M11x1,25 L: 58 mm	Con. Rod OEM : 8973577163
   		  			
6					
Isuzu 4JB1-T	NKR55		 1185 gr Torque : 80 Nm	Connecting Rod STD	BMV0407 1 pc.24x10x4cm
2.8 cc	Karsan J9 Premier			Connecting Rod SEMI	BMV0407SEMI 1 pc.24x10x4cm
R4				Bushing Bimetal Locked-Straight	BMV0405B 4 pcs. 10x6x4cm
				Bolt - 10.9 M10x1,25 L:49 mm	Con. Rod OEM : 8943296920
  		  			

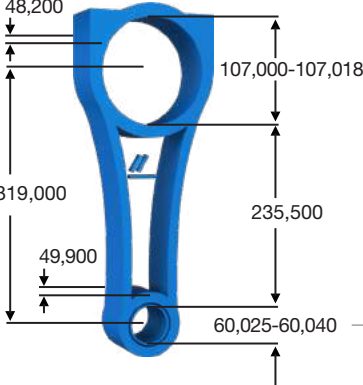
Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference	
7						
Isuzu 4JK1 Euro4 - 5 2.5 cc	D-Max NPR, NLR, NNR			Connecting Rod STD	BMY0408 1 pc.24x10x4cm	
Isuzu 4JJ1 Euro4 - 5 3.0 cc				Connecting Rod SEMI	BMY0408SEMI 1 pc.24x10x4cm	
R4				Bushing Bimetal Locked-Straight	BMY0408B 4 pcs. 10x6x4cm	
				Bolt - 10.9 M10x1,25 L:49 mm		
				Cross References Con. Rod OEM : 8973577163		
  				 FORGE	 CRACKED	 TAPERED



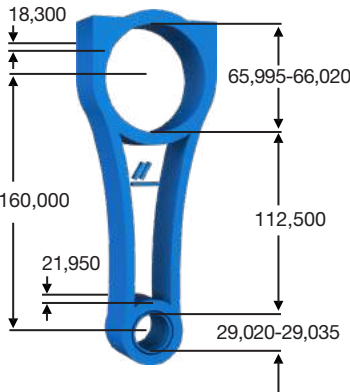
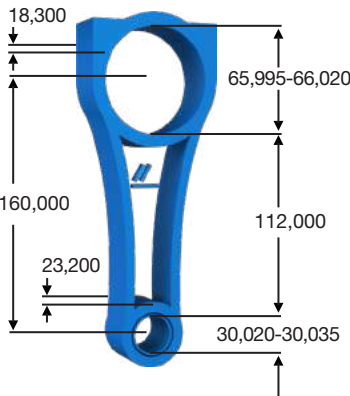
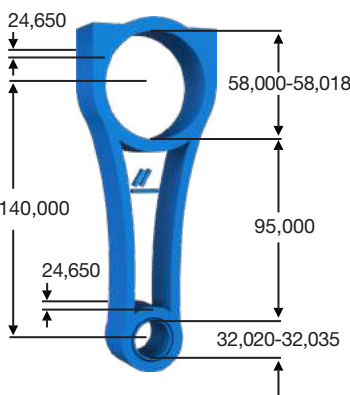
Engine Type	Models	Picture	Sizes (mm)	Products	BMV Reference
1					
Iveco - Fiat F1AE	Iveco Daily		 29,600 62,830-62,850 146,000 29,600 99,075 31,020-31,040 1140 gr Torque : 80 Nm 2nd Torque Option : 40 Nm + 60 °	Connecting Rod STD	BMV1405 1 pc.30x12x6cm
2.3 cc	Fiat Ducato			Connecting Rod SEMI	BMV1405SEMI 1 pc.30x12x6cm
R4	UAZ Patriot			Bushing Bimetal Locked-Straight	BMV1405B 4 pcs. 10x6x4cm
	Karsan Jest/J10			Bolt M10x1,25 L: 49 mm 8 pcs. 10x6x4cm	BMV1405CB
				Con. Rod OEM: 504 341 501 504 057 276	
   				  	
2					
Iveco - Fiat 3.0 JTD F1CE	Iveco Daily, Fiat Ducato Massif		 32,750 67,830-67,850 160,000 32,750 108,070 36,020,36,035 1340 gr Torque : 80 Nm	Connecting Rod STD	BMV1406 1 pc.30x12x6cm
Mitsubishi 4P10-7AT/T2/T4/T6	Citroen Jumper			Connecting Rod SEMI	BMV1406SEMI 1 pc.30x12x6cm
3.0 cc	Mitsubishi Fuso Canter 8B/9BL			Bushing Bimetal Locked-Straight	BMV1406B 4 pcs. 10x6x4cm
R4				Bolt - 10.9 M10x1,25 L:49 mm	
				Con. Rod OEM: 504 341 496	
   				  	
3					
Iveco - Fiat F1AF-F1AG	Iveco Daily		 27,550 59,830-59,850 146,000 27,550 100,580 31,020-31,040 985 gr Torque : 60 Nm	Connecting Rod STD	BMV1407 1 pc.24x10x4cm
2.3 cc	Fiat Ducato			Connecting Rod SEMI	BMV1407SEMI 1 pc.24x10x4cm
R4				Bushing Bimetal Locked-Straight	BMV1407B 4 pcs. 10x6x4cm
Euro 6				Bolt - 10.9 M9x1 L:46 mm 8 pcs. 10x6x4cm	BMV0805CB
				Con. Rod OEM: 5801841535, 5801842210 5802116073	
  				  	

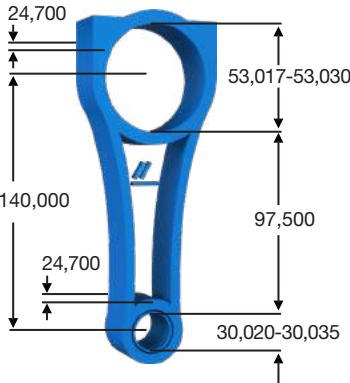
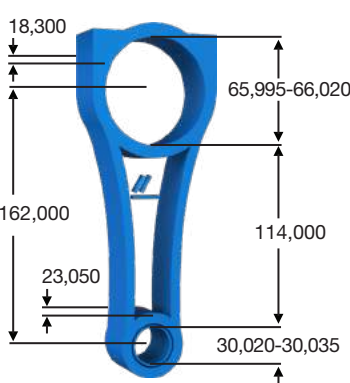
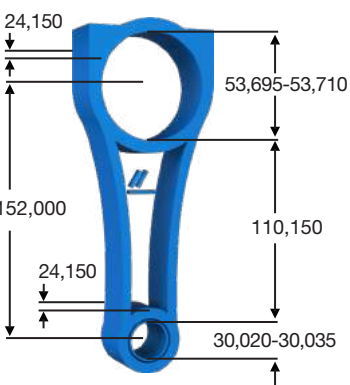
Engine Type	Models	Picture	Sizes (mm)	Products	BM Y Reference
4 Iveco - Fiat Sofim 8140/ S8W/S9W 2.8 cc R4	Iveco Daily Fiat Ducato Renault Master, Mascott Opel Movano Citroën Jumper Peugeot Boxer		 1290 gr Torque : 80 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M10x1,25 L:58 mm Con. Rod OEM: 500 352 497	BM Y0803 1 pc.24x10x4cm BM Y0803SEMI 1 pc.24x10x4cm BM Y0803B 4 pcs. 10x6x4cm
					
5 Iveco F4AF, F6AFE, NEF6 Euro 6 6.8(6728)cc R6	Iveco EuroCargo IV/V, Chassi Bus, Tector I, Crossway, Cityclass Daewoo Prima, Novus Irisbus Crossway	 1780 gr Torque : 60 Nm + 60°	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M10x1,25 L:51mm Con. Rod OEM : 5801441818, 5802086556, 5801441820, 5801839911	BM Y1451 1 pcs.48x15x6cm BM Y1451SEMI 1 pcs.48x15x6cm BM Y1451B 4 pcs.10x6x4cm 	
 					
6 Iveco/Case/ Fiat F3BE Euro III 13(12882) cc R6	Cursor 13, HD9, Stralis I, Trakker I, Eurostar, EuroTrakker	 4820 gr Torque : 120 Nm + 60° + 30°	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Con. Rod OEM: 504028545	BM Y1452 1 pcs.48x15x6cm BM Y1452SEMI 1 pcs.48x15x6cm BM Y1452B 4 pcs.10x6x4cm 	
 					

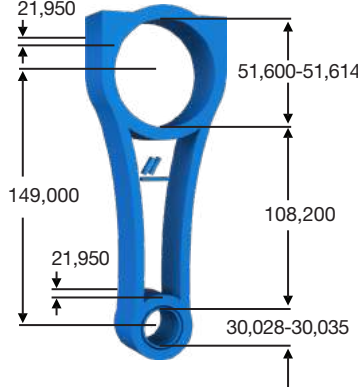
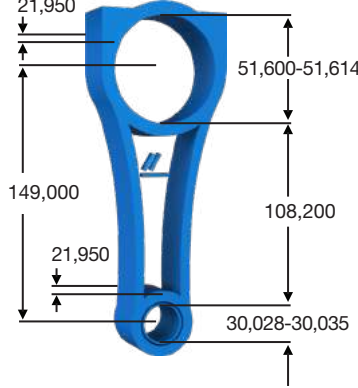
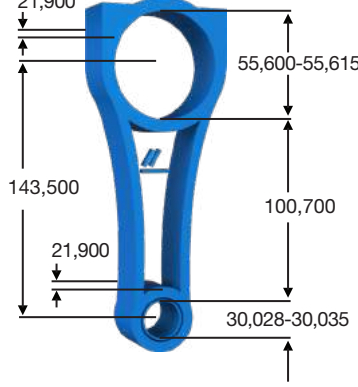
Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
7					
Iveco/Case/ Steyr F2CE, F2CFA, F2CFE, F2CFG, F2CGE, F2CFP, NEF8	Iveco Cursor IX, Stralis II, S Way, Trakker II, T-Way, X-Way, Urbanway Daewoo Novus,			Connecting Rod STD	BMY1453 1 pcs.48x15x6cm
Euro 6				Connecting Rod SEMI	BMY1453SEMI 1 pcs.48x15x6cm
8.8 (8709) cc				Bushing Bimetal Locked-Straight	BMY1453B 4 pcs.10x6x4cm
R6	Fiat Series 300				
			3340gr Torque : 50 Nm + 90°	Con. Rod OEM : 504254665, 5801654901, 5801757115	

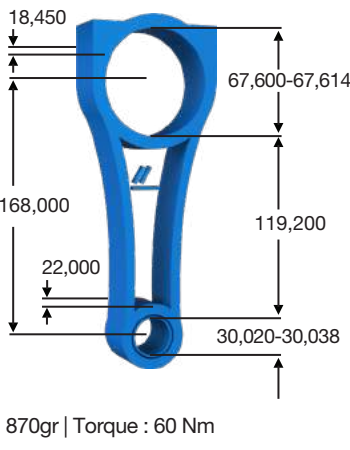
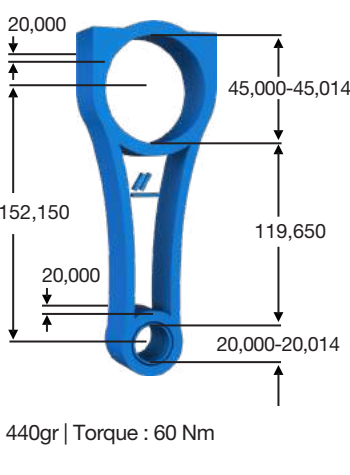

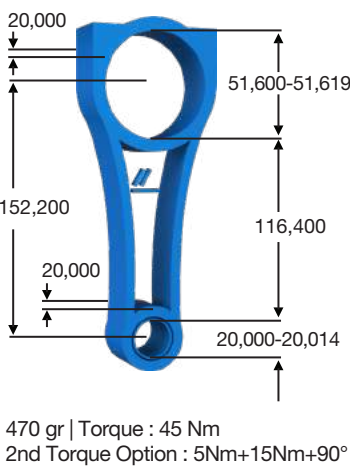
Engine Type	Models	Picture	Sizes (mm)	Products	BMV Reference
1	Jenbacher J320			Connecting Rod STD Bolt - 10.09 M18x1,5 L: 96mm Con. Rod OEM : 424942	BMV2151 1 pc.

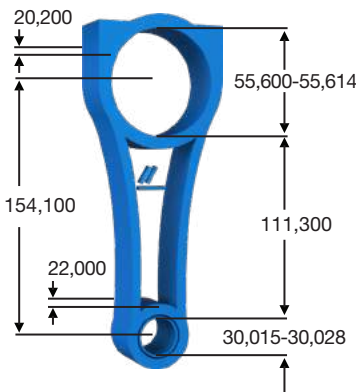
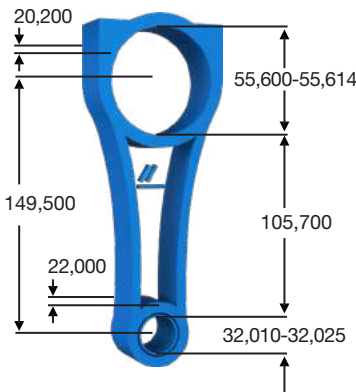


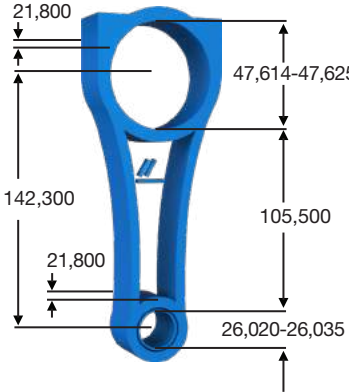
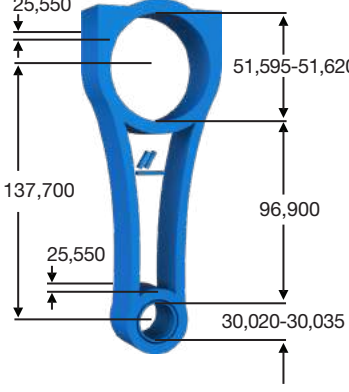

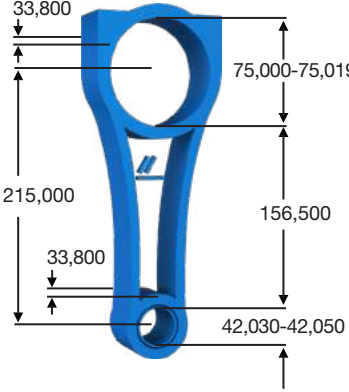
Engine Type	Models	Picture	Sizes (mm)	Products	BMV Reference
1 Land Rover 276DT, TDV6, TVM Peugeot UHZ(DT17) V6 - 2.7 cc Land Rover 368DT V8 - 3.6 cc 2.7 - 3.6 cc	Discovery III - IV Range Rover - Sport Jaguar S-Type, XF, XJ Peugeot 407, 607/Coupe/SW		 683 gr Torque : 45 Nm 2nd Torque Option : 20 Nm + 80 °	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M8x1 L: 47mm	BMV0201 2 pcs.30x12x6cm BMV0201SEMI 2 pcs.30x12x6cm BMV0201B 3 pcs. 10x6x4cm BMV0201CB 12 pcs.10x6x4cm Con. Rod OEM : DE116250 DA6625, LR010297
  				  	
2 Land Rover AJD V6-DT20 306DT, 30DDTX Euro 5 3.0 cc V6	Discovery IV Range Rover IV - Sport Jaguar XF, XF Sportbrake, XJ Citroen C5 III, C6 Peugeot 407 Coupe		 712 gr Torque : 45 Nm 2nd Torque Option : 20 Nm + 80 °	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M8x1 L: 47mm	BMV0202 2 pcs.30x12x6cm BMV0202SEMI 2 pcs.30x12x6cm BMV0202B 3 pcs.10x6x4cm BMV0201CB 12 pcs.10x6x4cm Con. Rod OEM : DA6626, LR051508, LR038168
  				  	
3 Land Rover 204DTA 241ps Jaguar JLR 240ps 2.0 (1999) cc R4 Euro 6	Range Rover Evoque Range Rover Evoque Convertible Range Rover Velar Discovery V Jaguar XE, XF, F-Pace		 817 gr Torque : 50 Nm 2nd Torque Option : 20 Nm + 80 °	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M8x1 L: 47mm	BMV0203 1 pc.30x12x6cm BMV0203SEMI 1 pc.30x12x6cm BMV0203B 4 pcs. 10x6x4cm BMV0201CB 8 pcs. 10x6x4cm Con. Rod OEM: LR124261
  				  	

Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
4 Land Rover 204 DTD 180ps R4 - 2.0cc	Ranger Rover Evoque Ranger Rover Velar Discovery Sport Discovery V		 755 gr Torque : 45 Nm 2nd Torque Option : 20Nm+80°	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M8x1 L: 47mm Con. Rod OEM: LR082540, AJ813171	BMY0204 1 pc.24x10x4cm BMY0204SEMI 1 pc.24x10x4cm BMY0203B 4 pcs. 10x6x4cm BMY0201CB 12 pcs. 10x6x4cm
   				  	
5 Land Rover 448DT Euro 5 4.4 cc V8	Ranger Rover III / IV / Sport II		 705 gr Torque : 45 Nm 2nd Torque Option : 20Nm+80°	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M8x1 L: 47mm Con. Rod OEM: LR035361 (Engine OEM)	BMY0205 1 pc.30x12x4cm BMY0205SEMI 1 pc.30x12x4cm BMY0202B 4 pcs. 10x6x4cm BMY0201CB 8 pcs. 10x6x4cm
 				  	
6 Land Rover/ Jaguar 224DT Peugeot/Citroen/ Opel/Fiat/ Lancia/ Tata/Vauxhall/ Ford DW12C/ FUD/RU/RUC/ RUD/RUE/ MTED4/BTED4/ UTED/ME5/ TED4/DD 2.2 cc R4	Phedra Ulysse 406, 508, 607, 807, Boxer C5, C6, C8, Xsara, Jumper Range Rover Evoque, Freelander II, Discovery Sport XF, XFI, XF Sportbrake		 790 gr Torque : 60 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L:46 mm Con. Rod OEM : 0603 95, 0603 C3, 9688244280, 9688245380, 9833274780 (L.Rover: LR001227, LR019693, LR051836)	BMY0812 1 pc.24x10x4cm BMY0812SEMI 1 pc.24x10x4cm BMY0811B 4 pcs. 10x6x4cm
				  	

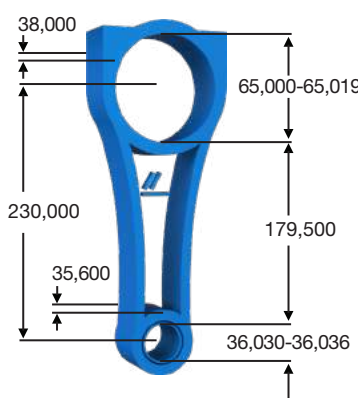
Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
1 Mercedes-Benz OM611, OM613 2.1 - 2.2 - 3.2 cc R4 - R6	Mercedes-Benz C-E-S-Class, Vito, Sprinter		 760 gr Torque : 45 Nm 2nd Torque Option : 25 Nm + 90 °	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M8x1 L:47 mm	BMY0713 1 pc.24x10x4cm BMY0713SEMI 1 pc.24x10x4cm BMY0713B 4 pcs. 10x6x4cm BMY0714CB 8 pcs. 10x6x4cm
				Con. Rod OEM : 611 030 0520	
   		  			
2 Mercedes-Benz OM612, OM646 2.2 - 2.7 cc R4 - R5	Mercedes-Benz C-E-CLK-ML-G Class, Sprinter, Vito, Viano		 750 gr Torque : 45 Nm 2nd Torque Option : 25 Nm + 90 °	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M8x1 L:47 mm	BMY0714 1 pc.24x10x4cm BMY0714SEMI 1 pc.24x10x4cm BMY0714B 4 pcs. 10x6x4cm BMY0714CB 8 pcs. 10x6x4cm
				Con. Rod OEM : 646 030 0020	
   		  			
3 Mercedes-Benz OM651 Jeep OM651 Freightliner OM651 2.2 cc R4	Mercedes-Benz Vito, A-B-C-E GLK-CLS, MLS -SLK Class, Viano, Sprinter Jeep Compass 2.2. CRD Freightliner Sprinter		 760 gr Torque : 45 Nm 2nd Torque Option : 25 Nm + 90 °	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M8x1 L:47 mm	BMY0715 1 pc.24x10x4cm BMY0715SEMI 1 pc.24x10x4cm BMY0714B 4 pcs. 10x6x4cm BMY0714CB 8 pcs. 10x6x4cm
				Con. Rod OEM : 651 030 0020	
   		  			

Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
4 Mercedes-Benz OM642 3.0cc - V6	Vito, Mixto, Sprinter, E300D, CLK, GLK, GLE, GLS, C300 320/350 CDI, Viano, CLK 320 CDI, CLS 320 CDI, CLS 350 BlueTEC, CLS 350 CDI, E280/300/320/350 BlueTEC CDI, G280/300/320/350 CDI/d GL 320/350 CDI, ML 280/300/320/350 BlueTEC CDI, R280/300/320/350 CDI, S320/350 BlueTEC/CDI, X350d			Connecting Rod STD Connecting Rod SEMI Bolt - 10.9 M8x1 L:47 mm	BMY0716 1 pc.30x12x6cm BMY0716SEMI 1 pc.30x12x6cm
			Con. Rod OEM : 642 030 4120, 642 030 5220		
					
5 Mercedes-Benz M270.910, M274.910 2014 → 1.6cc R4	C180/CGI, E180, SLC 180, A160, A200, B160, B180, B200, CLA180, CLA200, GLA180, GLA200			Connecting Rod STD Connecting Rod SEMI Bolt - 10.9 M8x1 L: 38 mm	BMY0717 1 pc.26x10x4cm BMY0717SEMI 1 pc.26x10x4cm
			Con. Rod OEM : 270 030 00 20, 270 030 03 20, 270 030 04 20, 270 030 05 20, 270 030 08 20		
					
6 Mercedes-Benz M270.920 M274.920 M264.920 2.0 cc R4	A, B, C, CLA, E, CLS, GLA, GLC, GLE, GLK, SLK, SLC, S Classes, Vito			Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M7x1 L: 38 mm	BMY0718 1 pc.24x10x4cm BMY0718SEMI 1 pc.24x10x4cm BMY0717B 4 pcs. 10x6x4cm BMY0806CB 8 pcs. 10x6x4cm
			Con. Rod OEM : 2740303400, 2700300120, 2740300020, 2740300400, 2740301800		
					

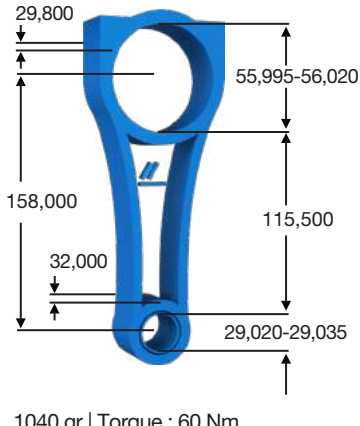
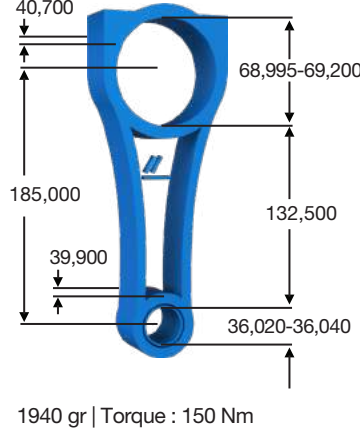
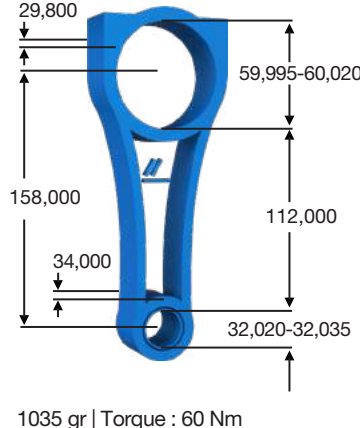
Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
7 Mercedes-Benz OM654.920 2.0(1950)cc R4 Mercedes-Benz OM656.929 3.0 cc R6	A, B, CLA, CLS, C, E, GLA, GLB, GLC, GLE, V Class, Sprinter, Vito S, CLS, E, G, GLE, GLS Class		20,200 55,600-55,614 154,100 111,300 22,000 30,015-30,028 715gr Torque : 45Nm 2nd Torque Option : 25Nm+90°	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M8 L: 40 mm Con. Rod OEM : 654 030 7000, 654 030 0100	BMY0719 1 pc.24x10x4cm BMY0719SEMI 1 pc.24x10x4cm BMY0719B 4 pcs. 10x6x4cm BMY0719CB 8 pcs. 10x6x4cm
   		  			
8 Mercedes-Benz OM654.820 2.0 (1992) cc R4	A, B, CLA, CLS, C, E, GLA, GLB, GLC, GLE, V Class, Sprinter, Vito		20,200 55,600-55,614 149,500 105,700 22,000 32,010-32,025 710 gr Torque : 45 Nm 2nd Torque Option : 25Nm+90°	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M8 L: 40 mm Con. Rod OEM : 654 030 15 00	BMY0720 1 pc.24x10x4cm BMY0720SEMI 1 pc.24x10x4cm BMY0720B 4 pcs. 10x6x4cm BMY0719CB 8 pcs. 10x6x4cm
   		  			
9 Mercedes-Benz OM626 Renault R9M 1.6 cc R4	Mercedes-Benz A, B, C, CLA- Class, Citan		25,550 51,595-51,620 127,200 86,400 25,550 30,020-30,035 655 gr Torque : 60 Nm 2nd Torque Option : 20 Nm + 45 °	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L:42 mm Con. Rod OEM : 626 030 0400, 95518876 Without Oil Hole	BMY0919 1 pc.24x10x4cm BMY0919SEMI 1 pc.24x10x4cm BMY0919B 4 pcs. 10x6x4cm BMY0901CB 8 pcs. 10x6x4cm
   		  			

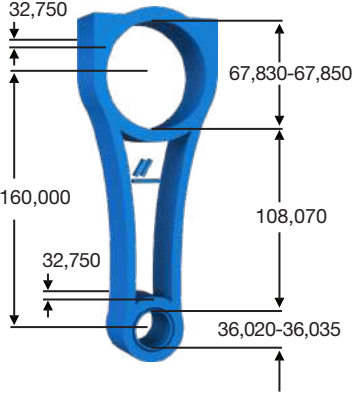
Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
10					
Mercedes-Benz OM607, OM608	Mercedes-Benz A, B, CLA, GLA Class, Citan			Connecting Rod STD	BMY0902 1 pc.24x10x4cm
Renault K9K 846, K9K 608, 872	Infiniti Q30			Connecting Rod SEMI	BMY0902SEMI 1 pc.24x10x4cm
1.5 cc - R4	Renault Megane IV, Kadjar, Scenic IV, Clio Captur			Bushing Bimetal Locked-Straight	BMY0901B 4 pcs. 10x6x4cm
Euro 5/6	Nissan Note, Micra			Bolt - 10.9 M9x1 L:42 mm	BMY0901CB 8 pcs. 10x6x4cm
Used in forged-steel piston engines. Es wird in geschmiedeten Stahlkolbenmotoren. Dövrne çelik pistonlu motorlarda kullanılır.	Dacia Lodgy			Con. Rod OEM : 607 030 0420	
			560 gr Torque : 60 Nm 2nd Torque Option : 20 Nm + 45 °		
11					
Renault/Nissan R9M	Talisman, Fluence, Megane, Trafic Scenic, Koleos, Espace			Connecting Rod STD	BMY0904 1 pc.24x10x4cm
Mercedes-Benz OM626	Qashqai, Juke X-Trail, NV300,			Connecting Rod SEMI	BMY0904SEMI 1 pc.24x10x4cm
Fiat/Opel/Vauxhall R9M	C Class			Bushing Bimetal Locked-Straight	BMY0916B 4 pcs. 10x6x4cm
1.6 cc	Vivaro			Bolt - 10.9 M9x1 L:42 mm	BMY0901CB 8 pcs. 10x6x4cm
R4	Talento			Con. Rod OEM : 121001039R, 121004759R, 1210000Q1H, 626 030 0420	
			675 gr Torque : 60Nm 2nd Torque Option : 20Nm+45°		
12					
Mercedes-Benz OM904, OM907, 4.3(4249)cc R4	Mercedes-Benz Axor I/II, Atego I/II, Zetros, Unimog, Beaver, Econic, Touro (O 500), 7-T/9-T/10-T 11-T/12-T/13-T 14-T/15-T/16-T 17-T/24-T Ser., LK/LN2, OF, OH, LO, OMC, O 500, MB, Cito (O 520), HPN, Boxer, O530, Vario, Allegro, Alliado, Citaro I (O530)/II, Conecto (O345), Touro (O 500), Friehtliner Fap Famos B-Series			Connecting Rod STD	BMY0751 1 pc.48x15x6cm
Mercedes-Benz OM924 4.8(4801)cc				Connecting Rod SEMI	BMY0751SEMI 1 pc.48x15x6cm
Mercedes-Benz OM906, OM909, 6.4 (6374) cc R6				Bushing Bimetal Locked-Straight	BMY0751B 4 pcs. 10x6x4cm
Mercedes-Benz OM926 7.2 (7201) cc R6				Bolt - 10.9 M12x1,25 L: 56	BMY0751CB 8 pcs. 10x6x4cm
				Con. Rod OEM : 906 030 1820, 906 030 1020, 906 030 0320, 906 030 0620, 906 030 2120, 906 030 1720	
			1920 gr Torque : 10Nm+45Nm+90°		

Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
13					
Mercedes-Benz OM470	Mercedes-Benz Actros, Tourismo II, Arocs, Antos, Citaro I/II, Capacity		Connecting Rod STD	BMY0752 1 pc.48x15x6cm	
MTU 6R 1100 C30/C40/C50			Connecting Rod SEMI	BMY0752SEMI 1 pc.48x15x6cm	
Euro 6	Setra Series 400/500		Bushing Bimetal Locked-Straight	BMY0752B 4 pcs. 10x6x4cm	
11.7(10677) cc			Bolt - 10.9 M14x1,50 L:74	BMY0752CB 8 pcs. 10x6x4cm	
R6	MTU 6R			Con. Rod OEM : 470 030 0620, 470 030 0120, 470 030 0220, 470 030 0520	
	Deutz Series 11				
14					
Mercedes-Benz OM471	Mercedes-Benz Actros, Arocs, Antos		Connecting Rod STD	BMY0753 1 pc.48x15x6cm	
Detroit Diesel DD13	Freightliner M2, 114, Cascadia, Century, Columbia, 122		Connecting Rod SEMI	BMY0753SEMI 1 pc.48x15x6cm	
Fuso 6R10			Bushing Bimetal Locked-Straight	BMY0753B 4 pcs. 10x6x4cm	
MTU 6R 1300	Mitsubishi Fuso Super Great		Bolt - 10.9 M15x1,5 L:78,5	BMY0753CB 8 pcs. 10x6x4cm	
Euro 6	Setra Series 400/500			Con. Rod OEM : 471 030 0820	
12.9 (12809) cc					
R6	MTU Serie 1300				
	Deutz Series 11				
	Western Star 4800, 5000, 5800, 6900				

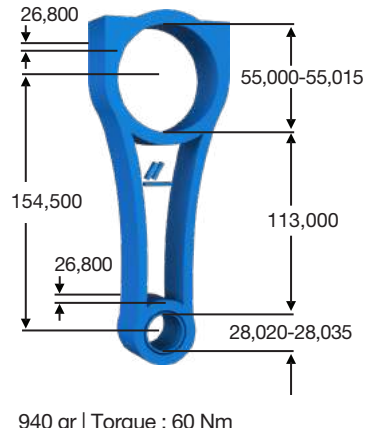
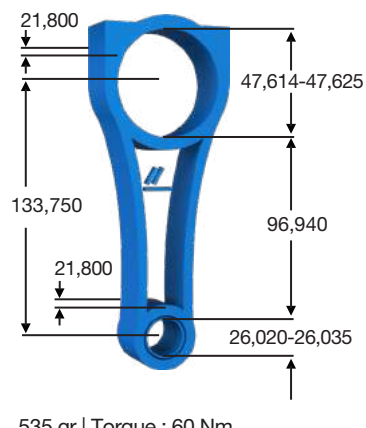
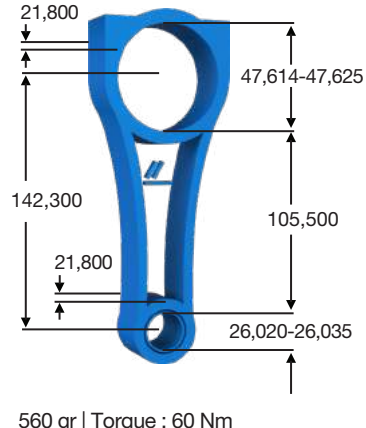
Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
15					
Mercedes-Benz, Fap-Famous, CBT Clark MHC, Hanomog, IHC- Case (CNH), Komatsu, New Holland, Toyota OM304, OM306, OM314, OM340, OM341, OM343, OM344, OM352, OM353, OM354, OM356, OM357, OM362, OM364, OM366, OM370, OM372, OM374, OM376, OM377, OM380, OM382, OM384, OM386, OM390, OM394, OM396, M352	2517, 2521, 1105, 2080, 2105, 2600, 55C, 714SP, 1317, 1318, 1319, 1320, 1414, 1416, 1417, 1418, 1419, 1420, 1421, 1422, 1424, 1513, 1514, 1516, 1521, 1524, 1526, 1551, 1560, 1613, 2214, 2216, 2217, 2219, 2220, 2314, 2318, 2320, 2420, 2421		Connecting Rod STD	BMY0754 1 pc.48x15x6cm	
			1950 gr Torque:40Nm + 90°	Con. Rod OEM : 366 030 3520, 366 030 2520, 366 030 2120, 366 030 7120	
D M Y ★HEAVY DUTY★ D M Y		     			




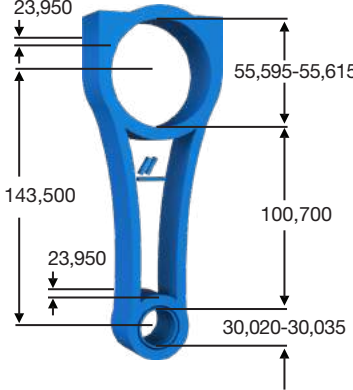
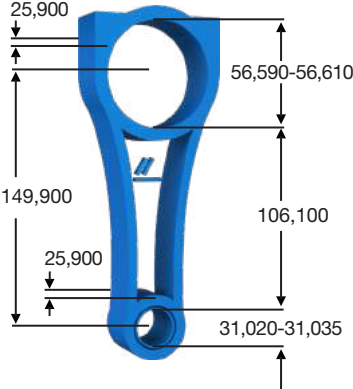
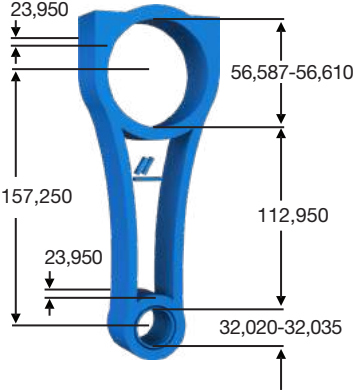
Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
1 Mitsubishi 4D55T, 4D56 Hyundai D4BF, D4BB, D4BH 2.5 cc R4	Mitsubishi L200/300 Hyundai Starex/ H100		 1040 gr Torque : 60 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L:46 mm Con. Rod OEM : MD371001 2351042010	BMY1303 1 pc.24x10x4cm BMY1303SEMI 1 pc.24x10x4cm BMY1303B 4 pcs. 10x6x4cm
   		  			
2 Mitsubishi 4D34T 3.9 cc R4	Mitsubishi Canter FE659T		 1940 gr Torque : 150 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 12.9 M12,5x1,25 L:68 Con. Rod OEM : ME012266	BMY1304 1 pc.24x10x4cm BMY1304SEMI 1 pc.24x10x4cm BMY1304B 4 pcs. 10x6x4cm
  		 			
3 Mitsubishi 4D56 TDI, 4D56T, 4D56U 2.5 cc R4	Mitsubishi L200/300 Hyundai H100 (2015-...)		 1035 gr Torque : 60 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L:46 mm Con. Rod OEM : 1115 A345, 1115 A035, 1115A343	BMY1305 1 pc.24x10x4cm BMY1305SEMI 1 pc.24x10x4cm BMY1305B 4 pcs. 10x6x4cm
   		  			

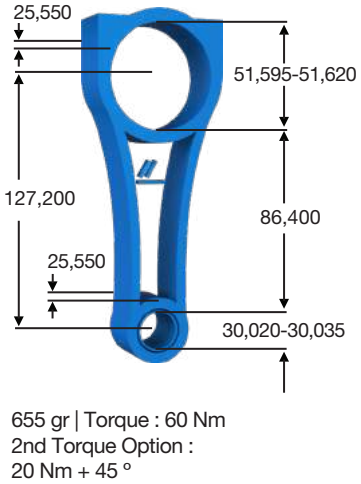
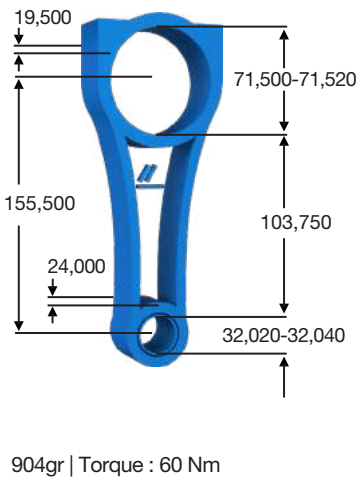
Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
4					
Mitsubishi 4P10-7AT/T2/ T4/T6	Mitsubishi Fuso Canter 8B/9BL			Connecting Rod STD	BMY1406 1 pc.30x12x6cm
	Fiat Ducato			Connecting Rod SEMI	BMY1406SEMI 1 pc.30x12x6cm
Fiat/Iveco 3.0 JTD F1CE	Iveco Daily, Massif			Bushing Bimetal Locked-Straight	BMY1406B 4 pcs. 10x6x4cm
3.0 cc				Bolt - 10.9 M10x1,25 L:49 mm	
R4	Citroen Jumper			Con. Rod OEM : 504 341 496	
			1340 gr Torque : 80 Nm	  	



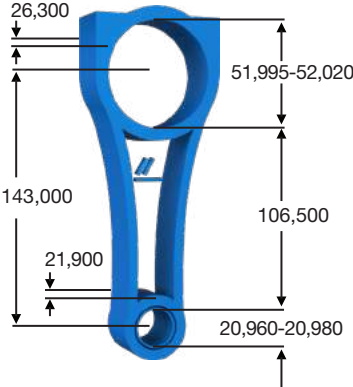
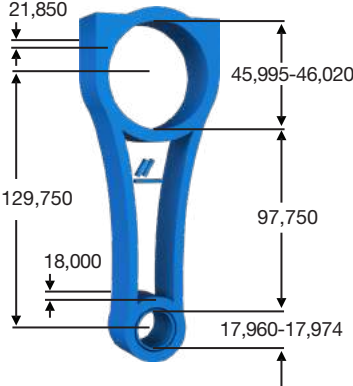

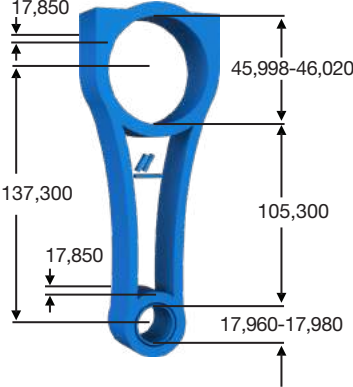
Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
1 Nissan YD22/ YD25 2.5 cc R4	Nissan Primera, Almera X-Trail, Navara, Frontier, Pathfinder		 26,800 55,000-55,015 154,500 26,800 113,000 28,020-28,035 940 gr Torque : 60 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L:46 mm Con. Rod OEM : 12100-EB33A	BMY1201 1 pc.24x10x4cm BMY1201SEMI 1 pc.24x10x4cm BMY1201B 4 pcs. 10x6x4cm
  				  	
2 Nissan - Renault K9K 1.5 cc R4	Nissan Micra, Qashqai, Juke		 21,800 47,614-47,625 133,750 21,800 96,940 26,020-26,035 535 gr Torque : 60 Nm 2nd Torque Option : 20 Nm + 45 °	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L:42 mm Con. Rod OEM : 770 147 5074	BMY0901 1 pc.24x10x4cm BMY0901SEMI 1 pc.24x10x4cm BMY0901B 4 pcs. 10x6x4cm BMY0901CB 8 pcs. 10x6x4cm
  				  	
3 Renault K9K 846, K9K 608, 872 Mercedes-Benz OM607, OM608 1.5 cc - R4 Euro 5/6 Used in forged-steel piston engines. Es wird in geschmiedeten Stahlkolbenmotoren. Dövmə çelik pistonlu motorlarda kullanılır.	Nissan Note, Micra Infiniti Q30 Mercedes-Benz A, B, CLA, GLA Class, Citan Renault Megane IV, Kadjar, Scenic IV, Clio Captur Dacia Lodgy		 21,800 47,614-47,625 142,300 21,800 105,500 26,020-26,035 560 gr Torque : 60 Nm 2nd Torque Option : 20 Nm + 45 °	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L:42 mm Con. Rod OEM : 121008820R 6070302100, 12100-00QAJ, 12100-00Q1J	BMY0902 1 pc.24x10x4cm BMY0902SEMI 1 pc.24x10x4cm BMY0901B 4 pcs. 10x6x4cm BMY0901CB 8 pcs. 10x6x4cm
   				  	

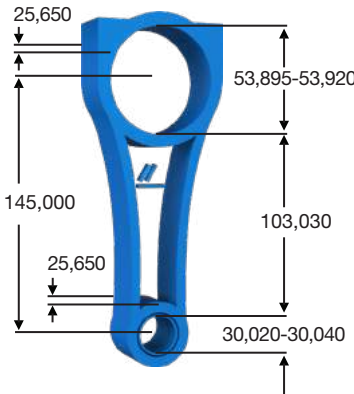
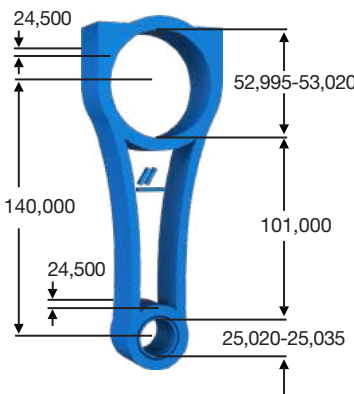
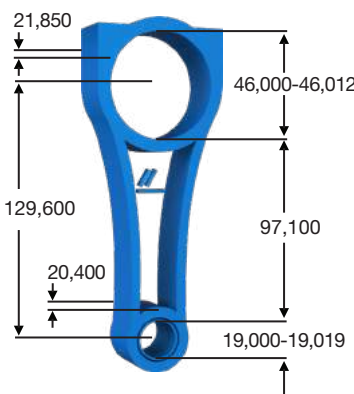
Engine Type	Models	Picture	Sizes (mm)	Products	BMV Reference	
4						
Renault/Nissan R9M Mercedes-Benz OM626 Fiat/Opel/Vauxhall R9M 1.6 cc R4 Long Type Langer Typ Uzun Tip	Talisman, Fluence, Megane, Trafic Scenic, Koleos, Espace Qashqai, Juke X-Trail, NV300, C Class Vivaro Talento		 675 gr Torque : 60Nm 2nd Torque Option : 20Nm+45°	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L:42 mm Con. Rod OEM : 121001039R, 121004759R, 1210000Q1H, 626 030 0420	BMV0904 1 pc.24x10x4cm BMV0904SEMI 1 pc.24x10x4cm BMV0916B 4 pcs. 10x6x4cm BMV0901CB 8 pcs. 10x6x4cm	
5						
Nissan - Renault G9U 2.5 cc R4	Nissan Interstar		 870 gr Torque : 60 Nm 2nd Torque Option : 20 Nm + 45 °	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L:42 mm Con. Rod OEM : 770 147 3615	BMV0913 1 pc.24x10x4cm BMV0913SEMI 1 pc.24x10x4cm BMV0913B 4 pcs. 10x6x4cm BMV0901CB 8 pcs. 10x6x4cm	
6						
Nissan - Renault M9R 2.0 cc R4	Nissan Qashqai, X-Trail		 730 gr Torque : 60 Nm 2nd Torque Option : 20 Nm + 45 °	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L:42 mm Con. Rod OEM : 770 147 7831	BMV0915 1 pc.24x10x4cm BMV0915SEMI 1 pc.24x10x4cm BMV0915B 4 pcs. 10x6x4cm BMV0901CB 8 pcs. 10x6x4cm	

Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
7 Nissan - Renault M9R 2.0 cc R4	Nissan Qashqai, X-Trail		 760 gr Torque : 60 Nm 2nd Torque Option : 20 Nm + 45 °	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L:42 mm	BMY0916 1 pc.24x10x4cm BMY0916SEMI 1 pc.24x10x4cm BMY0916B 4 pcs. 10x6x4cm BMY0901CB 8 pcs. 10x6x4cm Con. Rod OEM : 7701476577, 12100-00Q0A
 				  	
8 Nissan - Renault G9T 2.2 cc R4	Nissan Interstar, Primastar		 873 gr Torque : 60 Nm 2nd Torque Option : 20 Nm + 45 °	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L:42 mm	BMY0917 1 pc.24x10x4cm BMY0917SEMI 1 pc.24x10x4cm BMY0913B 4 pcs. 10x6x4cm BMY0901CB 8 pcs. 10x6x4cm Con. Rod OEM : 770 147 2847
  				  	
9 Nissan - Renault M9T 2.3 cc R4	Nissan NV400, Navara, Qashqai, X-Trail, Primastar Mercedes-Benz X-Class		 805 gr Torque : 60 Nm 2nd Torque Option : 20 Nm + 45 °	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L:42 mm	BMY0918 1 pc.24x10x4cm BMY0918SEMI 1 pc.24x10x4cm BMY0915B 4 pcs. 10x6x4cm BMY0901CB 8 pcs. 10x6x4cm Con. Rod OEM : 121004942R
   				  	

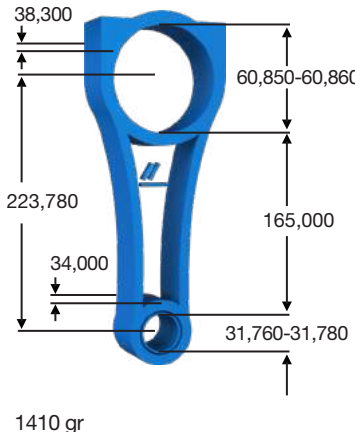
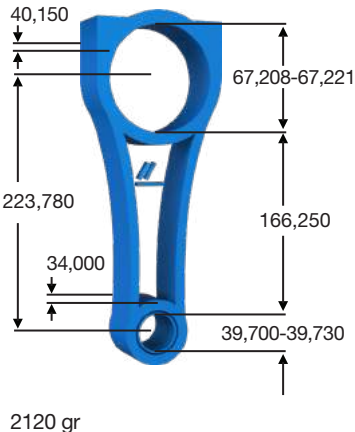
Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
10 Nissan-Renault R9M Mercedes-Benz OM626 1.6 cc R4	Nissan Juke, Almera, Cube, Micra, Note, NV200			Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L:42 mm	BMY0919 1 pc.24x10x4cm BMY0919SEMI 1 pc.24x10x4cm BMY0916B 4 pcs. 10x6x4cm BMY0901CB 8 pcs. 10x6x4cm Con. Rod OEM : 121006304R 121000425R, 1210000Q0K, 95518876
  				  	
12 Renault, Nissan, Infiniti V9X 3.0 cc V6	Renault Laguna III, Latitude Nissan Navara, Pathfinder Infiniti QX70D, FX30d, EX30d, M30d			Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L:50 mm	BMY0923 1 pc.30x12x4cm BMY0923SEMI 1 pc.30x12x4cm BMY0915B 4 pcs. 10x6x4cm BMY0901CB 8 pcs. 10x6x4cm Con. Rod OEM : 7701478766
   				  	



Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
1 Opel OHC C20LET/NE (8V,16V) 1.8 - 2.0 cc R4	Opel Vectra, Astra, Omega Saab 9-3 Lotus Europa S Cadillac BLS		 640 gr Torque : 60 Nm	Connecting Rod STD Bolt - 10.9 M9x1 L:42 mm Con. Rod OEM : 90541753, 622 028	BMY1501 1 pc.24x10x4cm
 			  		
2 Opel OHC X16/ Z16 (8V,16V) 1.6 cc R4	Opel Corsa, Astra, Vectra Chavrolet Aveo		 423 gr Torque : 50 Nm	Connecting Rod STD Bolt - 10.9 M8x1 L:41 mm Con. Rod OEM : 933 251 28 622 035	BMY1502 1 pc.24x10x4cm
 			  		
3 Opel Z12XEP, X12XEP A14XEP, Z14XEP, X14XEP Twinport 1.2 - 1.4 cc R4	Opel/Vauxhall Corsa/Holden Tigra, Astra, Meriva, Astra J Zafira Tourer, Combo C, Adam, Mokka Chevrolet Cruze, Volt Buick Encore		 355 gr Torque : 45 Nm	Connecting Rod STD Bolt - 10.9 M7x1 L:38 mm Con. Rod OEM : 622 558	BMY1503 1 pc.24x10x4cm
 			 		

Engine Type	Models	Picture	Sizes (mm)	Products	BMV Reference
4					
Opel/Vauxhall A20DTH, A20DTJ Y20DTJ, Z20DTJ	Opel Insignia, Astra J		 740 gr Torque : 70 Nm 2nd Torque Option : 25 Nm + 60 °	Connecting Rod STD	BMV1504 1 pc.24x10x4cm
	Fiat Freemont, Doblo, Bravo Lancia/Chrysler Delta			Connecting Rod SEMI	BMV1504SEMI 1 pc.24x10x4cm
Fiat D20AA Euro5				Bushing Bimetal Locked-Straight	BMV1504B 4 pcs. 10x6x4cm
2.0 cc	Alfa Romeo Brera, Spider, 159, Giulietta			Bolt - 10.9 M9x1 L:46 mm	BMV0805CB 8 pcs. 10x6x4cm
R4				Con. Rod OEM : 555 684 66, 555 978 94 Without Bearing Lug (for with Lug BMV1404)	
  		  			
5					
Opel - Vauxhall GM B 16 DTL, B 16 DTE, B 16 DTU, B 16 DTI, B 16 DTN,	Astra J/K, Crossland X, Mervia B, Mokka X, Insignia A/B, Zafira C		 600 gr Torque : 60 Nm 2nd Torque Option : 25 Nm + 60 °	Connecting Rod STD	BMV1506 1 pc.24x10x4cm
				Connecting Rod SEMI	BMV1506SEMI 1 pc.24x10x4cm
	Buick Regal			Bushing Bimetal Locked-Straight	BMV1506B 4 pcs. 10x6x4cm
1.6 cc				Bolt - 10.9 M9x1 L: 46 mm	
R4				Con. Rod OEM : 55596544, 55501529	
  		  			
6					
Opel - Vauxhall GM A16 LET, A16 XER Euro 5, Euro 6	Opel Vauxhall, Astra H, J, Insignia A, Mokka		 420 gr Torque : 45 Nm 2nd Torque Option : 10 Nm + 60 ° + 15 °	Connecting Rod STD	BMV1507 1 pc.24x10x4cm
				Connecting Rod SEMI	BMV1507SEMI 1 pc.24x10x4cm
	Chevrolet Cruze, Aveo, Sonic, Trax			Bushing Bimetal Locked-Straight	BMV1507B 4 pcs. 10x6x4cm
1.6 cc				Bolt - 10.9 M8x1 L : 38 mm	
R4	Buick Excelle			Con. Rod OEM : 622 111, 555 684 67	
  		  			

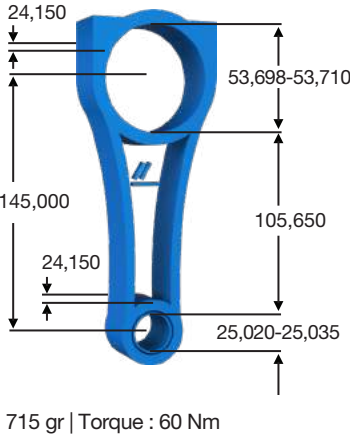
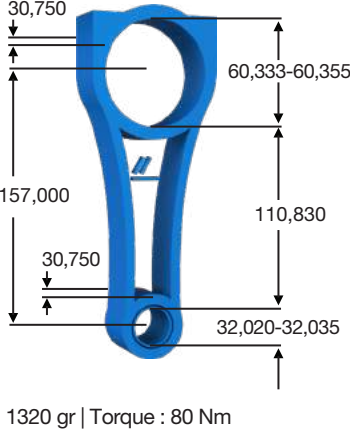
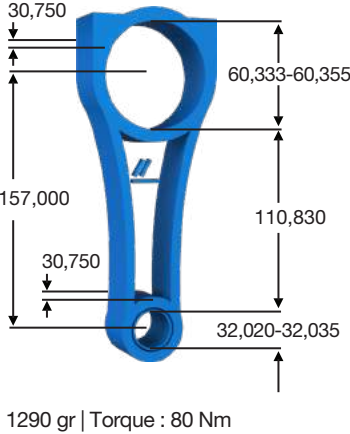
Engine Type	Models	Picture	Sizes (mm)	Products	BMV Reference
7 Opel-Vauxhall Chevrolet - GM A13DTC Euro 5, A13DTE, A13DTR Euro 5, A13FD Euro 5, B13DTC Euro 5, B13DTE, B13DTR, D13A Euro 4, Y13DT Euro 3/4, Z13DT Euro 4, Z13DTE Euro 4, Z13DTH Euro 4, Z13DTI Euro 4, Z13DTJ Euro 4, Z13DTR Euro 4, CDTI 1.3 cc R4	Fiat Albea, Doblò, Fiorino, Grande Punto, Linea, 500, Palio, Panda, Punto Alfa Romeo, MiTo Lancia Musa, Ypsilon Suzuki Swift, SX4, Splach		450 gr Torque : 45 Nm 2nd Torque Option : 20Nm + 40 °	Connecting Rod STD BMV1401 1 pc.24x10x4cm Connecting Rod SEMI BMV1401SEMI 1 pc.24x10x4cm Bushing Bimetal Locked-Straight BMV1401B 4 pcs. 10x6x4cm Bolt - 10.9 M8x1 L:38 mm BMV1401CB 8 pcs. 10x6x4cm Con. Rod OEM : 735 012 29, 552 086 24	
8 Opel Z19DT/H 1.9 cc R4	Alfa Romeo 146,147,159,GT Cadillac BLS Fiat Doblo, Bravo, Punto Fiat Croma, Marea, Stilo Lancia Delta, Lybra, Musa Opel Signum, Vectra C Opel Zafira B Saab 9-3, 9-5, Suzuki SX4		760 gr Torque : 60 Nm	Connecting Rod STD BMV1402 1 pc.24x10x4cm Connecting Rod SEMI BMV1402SEMI 1 pc.24x10x4cm Bushing Bimetal Locked-Straight BMV1402B 4 pcs. 10x6x4cm Bolt - 10.9 M9x1 L:46 mm Con. Rod OEM : 467 689 51	
9 Opel-Chevrolet Z20DMH, Z20S, Z20DM 2.0 cc R4	Chevrolet Captiva, Cruze, Lacetti, Epica Opel Antara 4x2, 4x4 150ps		885 gr Torque : 50 Nm	Connecting Rod STD BMV0602 1 pc.24x10x4cm Connecting Rod SEMI BMV0602SEMI 1 pc.24x10x4cm Bushing Bimetal Locked-Straight BMV0602B 4 pcs. 10x6x4cm Bolt - 10.9 M8x1 L:47 mm Con. Rod OEM : 23510 27000, 23510 27300, 23510 27010, 23510 27400, 23510 27410, 96440175, 4807976	

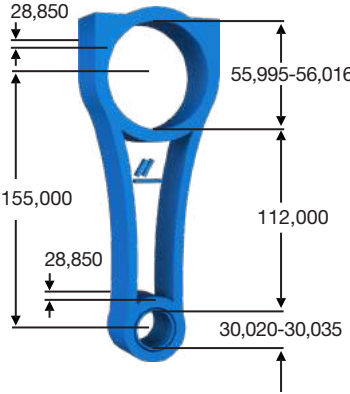
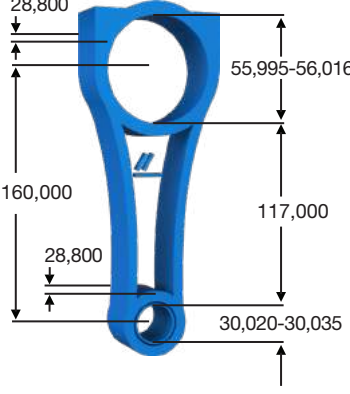
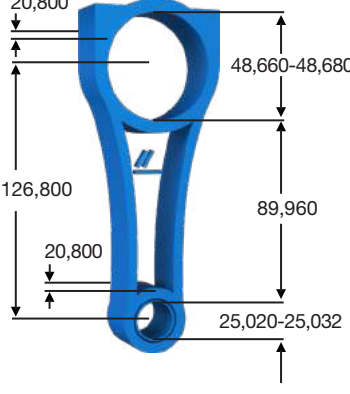
Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
1	Perkins/ Massey Ferguson D152, D203			Connecting Rod STD	BMY2001 1 pc.48x15x6cm
2	Perkins, Massey Ferguson, Atlas Copco 1004-40, 1004-42, 1006-60 Caterpillar 3054C/E, 3056E			Connecting Rod STD	BMY2002 1 pc.48x15x6cm

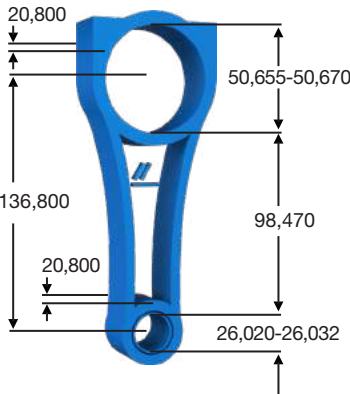
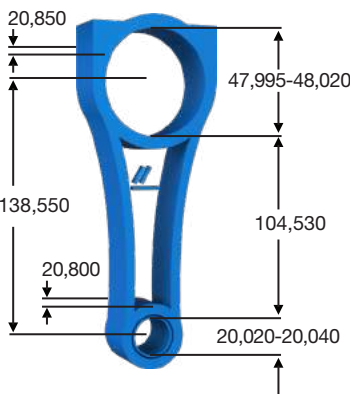
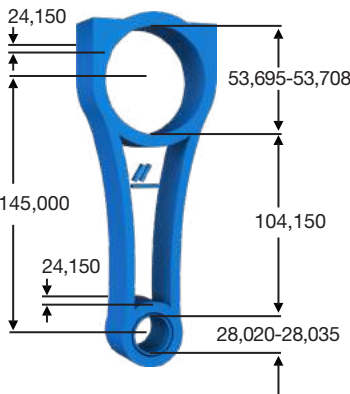



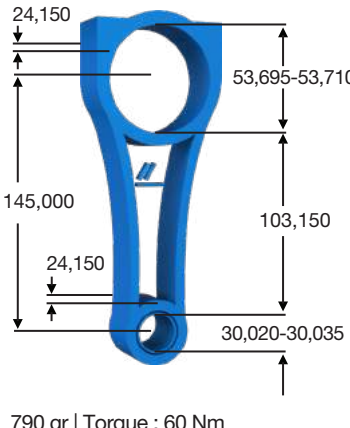


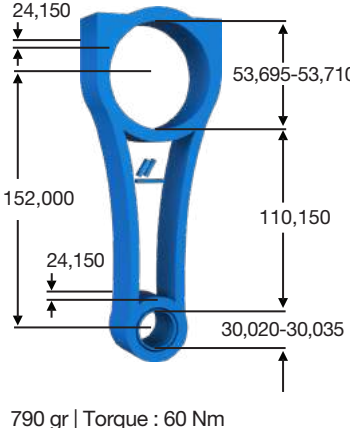

Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
1 Porsche M96.01 M96.02 M96.04 3.4 cc B6 Porsche M96.03 M96.05 3.6 cc B6	Boxter, Cayman, Tagra, 911		Connecting Rod STD BMY0501 1 pc.24x10x4cm Connecting Rod SEMI BMY0501SEMI 1 pc.24x10x4cm Bushing Bimetal Locked-Straight BMY0501B 6 pcs. 10x6x4cm Bolt - 10.9 M9x1 L:57 mm Con. Rod OEM : 9961031025R, 9961031026R, 9961031028R		
2 Porsche M96.22 M96.23 M97.20 2.7 cc B6	Boxter, Cayman, Tagra		Connecting Rod STD BMY0502 1 pc.24x10x4cm Connecting Rod SEMI BMY0502SEMI 1 pc.24x10x4cm Bushing Bimetal Locked-Straight BMY0501B 6 pcs. 10x6x4cm Bolt - 10.9 M9x1 L:57 mm Con. Rod OEM : 9961031102R		



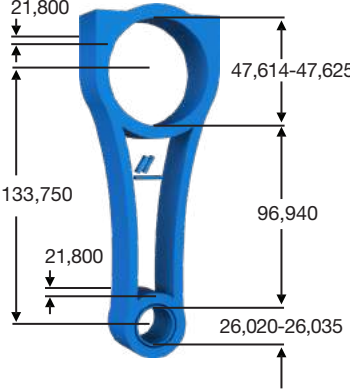
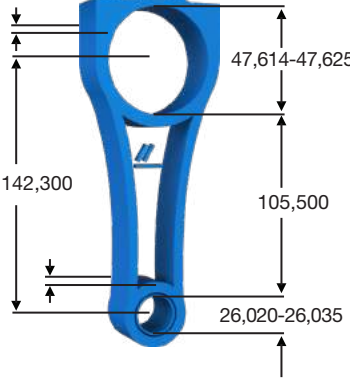
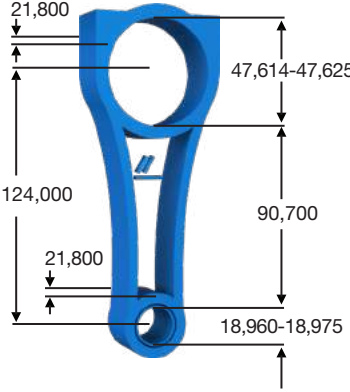
Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
1 Peugeot DW8/ XUD9, A, Z, B 1.9 cc R4	Peugeot Partner, Boxer, 306, 406 Citroen Jumper, Jumpy Fiat Scudo, Ducato Suzuki Baleno		 715 gr Torque : 60 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L:46 mm Con. Rod OEM : 0603 77	BMY0801 1 pc.24x10x4cm BMY0801SEMI 1 pc.24x10x4cm BMY0801B 4 pcs. 10x6x4cm
   		  			
2 Peugeot Sofim S8U, S9U 2.5 cc R4	Peugeot Boxer		 1320 gr Torque : 80 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M10x1,25 L: 58 mm Con. Rod OEM : 7473171	BMY0802 1 pc.24x10x4cm BMY0802SEMI 1 pc.24x10x4cm BMY0803B 4 pcs. 10x6x4cm
  		  			
3 Peugeot Sofim S8W, S9W 2.8 cc R4	Peugeot Boxer		 1290 gr Torque : 80 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M10x1,25 L: 58 mm Con. Rod OEM : 500 352 497	BMY0803 1 pc.24x10x4cm BMY0803SEMI 1 pc.24x10x4cm BMY0803B 4 pcs. 10x6x4cm
  		  			

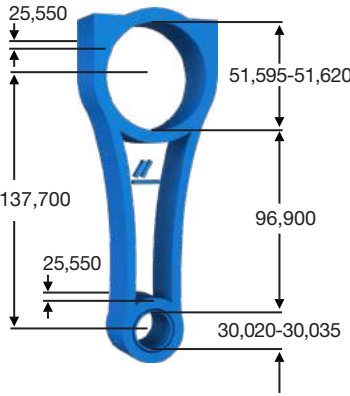



Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
4 Peugeot 4HG 110ps 4HH 130ps 4HJ 150ps 2.2 cc R4	Peugeot Boxer		 28,850 55,995-56,016 155,000 28,850 112,000 30,020-30,035	Connecting Rod STD	BMY0804 1 pc.24x10x4cm
	Citroen Jumper			Connecting Rod SEMI	BMY0804SEMI 1 pc.24x10x4cm
				Bushing Bimetal Locked-Straight	BMY0804B 4 pcs. 10x6x4cm
				Bolt - 10.9 M9x1 L:46 mm	BMY0805CB 8 pcs. 10x6x4cm
				Con. Rod OEM : 0603 E3/E4/E5	
    			882 gr Torque : 60 Nm 2nd Torque Option : 30 Nm+100 °	  	
5 Peugeot 4HU, 120ps 4HV 100ps Fiat 4HU 120ps 4HV 100ps 2.2 cc R4	Peugeot Boxer		 28,800 55,995-56,016 160,000 28,800 117,000 30,020-30,035	Connecting Rod STD	BMY0805 1 pc.24x10x4cm
	Citroen Jumper			Connecting Rod SEMI	BMY0805SEMI 1 pc.24x10x4cm
				Bushing Bimetal Locked-Straight	BMY0805B 4 pcs. 10x6x4cm
				Bolt - 10.9 M9x1 L:46 mm	BMY0805CB 8 pcs. 10x6x4cm
				Con. Rod OEM PSA : 0603 97/98 Con. Rod OEM FIAT : 9659672280, 9661857980, 9661858180, 9667060880, 9667061080	
    			873 gr Torque : 60 Nm 2nd Torque Option : 30 Nm+100 °	  	
6 Peugeot DV4 TD/TED4 1.4 cc R4	Peugeot 206, 207, 1007		 20,800 48,660-48,680 126,800 20,800 89,960 25,020-25,032	Connecting Rod STD	BMY0806 1 pc.24x10x4cm
	Ford Fiesta, Fusion			Connecting Rod SEMI	BMY0806SEMI 1 pc.24x10x4cm
	Citroen C1, C2, C3, Xsara			Bushing Bimetal Locked-Straight	BMY0806B 4 pcs. 10x6x4cm
	Mazda 2			Bolt - 10.9 M7x1 L: 38 mm	BMY0806CB 8 pcs. 10x6x4cm
	Suzuki Liana			Con. Rod OEM : 0603 88	
	Toyota Aygo		500 gr Torque : 45 Nm 2nd Torque Option : 5 Nm + 10 Nm + 130 °	  	


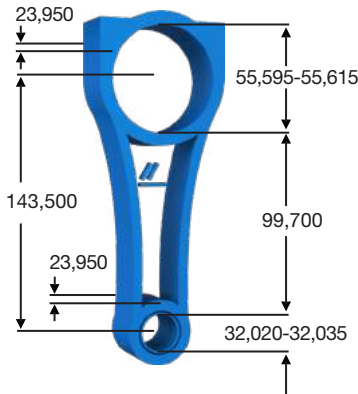


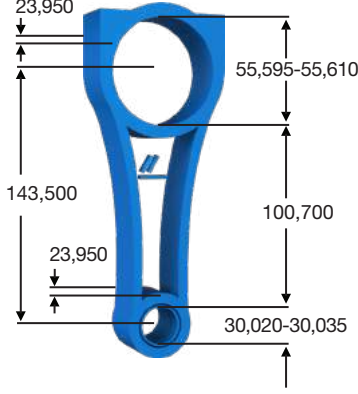

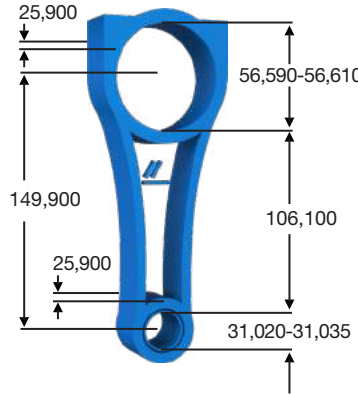

Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
7 Puegeot DV6 ATED4B, TED4C 1.6 cc R4	 Peugeot 207, 307, 308, 407, Partner, 508 Citroen C3, C4, Berlingo Ford C-Max, Focus, Fiesta MINI Cooper D Mazda 2, 3 Volvo C30, S40, V50/60, S60 Suzuki SX4		 600 gr Torque : 45 Nm 2nd Torque Option : 5 Nm + 10 Nm + 130 °	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M7x1 L: 38 mm	BMY0807 1 pc.24x10x4cm BMY0807SEMI 1 pc.24x10x4cm BMY0807B 4 pcs. 10x6x4cm BMY0806CB 8 pcs. 10x6x4cm Con. Rod OEM : 060392 - 0603C0
					
8 PSA EP6, EP6C EP6DT, EP6CDTX BMW MINI N13 B16 N14 B16 N18 B16 1.6 cc R4	 Peugeot 207, 208, 2008, 308, 3008, 508 Citroen C4, DS3, DS4, C3		 465 gr Torque : 45 Nm 2nd Torque Option : 5 Nm + 15 Nm + 130 °	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M7x1 L: 38 mm	BMY0808 1 pc.24x10x4cm BMY0808SEMI 1 pc.24x10x4cm BMY0808B 4 pcs. 10x6x4cm BMY0806CB 8 pcs. 10x6x4cm Con. Rod OEM : 0603 96, 161 366 51 80 11247621253 BMW
					
9 Peugeot DW10BTED4/ RHK/ RHR/RHF/ RHJ/FD/FC Volvo D4204T/ D4204T2 2.0 cc R4	 Peugeot Partner/Berlingo 307, 407, 607, 807 308, 508 Volvo C30, C70, S40, V50, S80, V70 2.0D		 780 gr Torque : 70 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L:56 mm	BMY0810 1 pc.24x10x4cm BMY0810SEMI 1 pc.24x10x4cm BMY0810B 4 pcs. 10x6x4cm Con. Rod OEM : 0603 90 - 0603 A6
					

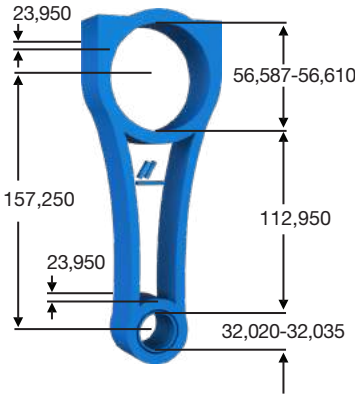

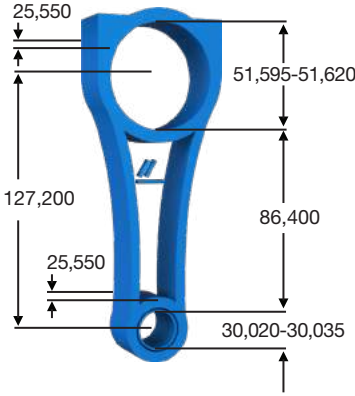

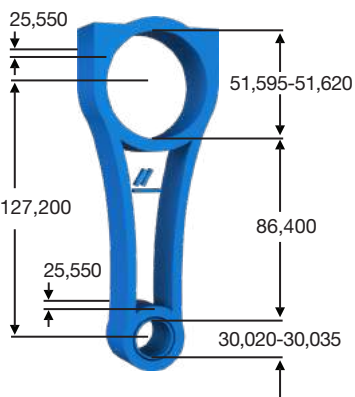

Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
10					
Peugeot DW10CTED4, DW10FUD RHH, RHE, RH02	Peugeot 308, 407, 508, 3008, 5008, RCZ, Partner			Connecting Rod STD	BMY0811 1 pc.24x10x4cm
2.0 cc	Citroen C4, C5, DS4, DS5, Berlingo, Jumpy, Xsara			Connecting Rod SEMI	BMY0811SEMI 1 pc.24x10x4cm
R4	Ford Focus, C-Max, Transit Panther C			Bushing Bimetal Locked-Straight	BMY0811B 4 pcs. 10x6x4cm
				Bolt - 10.9 M9x1 L:46 mm	
		Con. Rod OEM : 0603 C5, 1613238180, 1406651180, 1606651180			
					
11					
Peugeot/Citroen/ Opel/Fiat/ Lancia/ Tata/Vauxhall/ Ford DW12C/ FUD/RU/RUC/ RUD/RUE/ MTED4/BTED4/ UTED/ME5/ TED4/DD	406, 508, 607, 807, Boxer C5, C6, C8, Xsara, Jumper Range Rover Evoque, Freelander II, Discovery Sport XF, XFI, XF Sportbrake			Connecting Rod STD	BMY0812 1 pc.24x10x4cm
Land Rover/ Jaguar 224DT	Phedra			Connecting Rod SEMI	BMY0812SEMI 1 pc.24x10x4cm
2.2 cc	Ulysse			Bushing Bimetal Locked-Straight	BMY0811B 4 pcs. 10x6x4cm
R4				Bolt - 10.9 M9x1 L:46 mm	
		Con. Rod OEM : 0603 95, 0603 C3, 9688244280, 9688245380, 9833274780 (L.Rover: LR001227, LR019693, LR051836)			
					


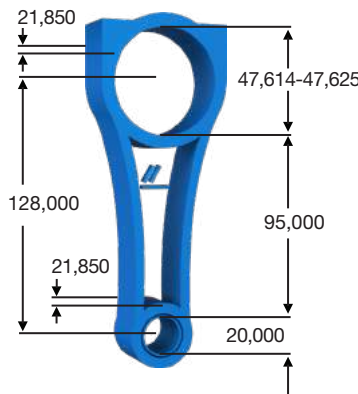


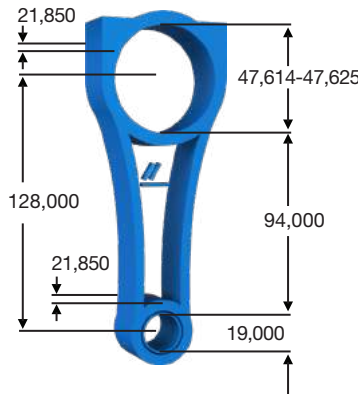

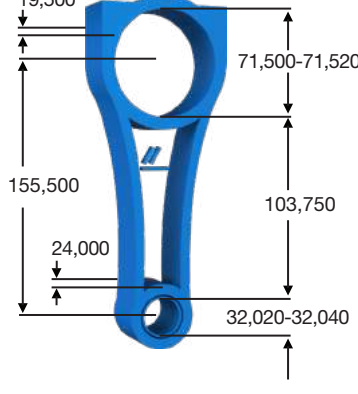



Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
1	Renault K9K			Connecting Rod STD	BMY0901 1 pc.24x10x4cm
	1.5 cc R4			Connecting Rod SEMI	BMY0901SEMI 1 pc.24x10x4cm
	Renault Clio, Kangoo, Fluence Megane, Latitude, Laguna, Captur Dacia Logan, Sandero, Duster			Bushing Bimetal Locked-Straight	BMY0901B 4 pcs. 10x6x4cm
	Nissan Micra, Qashqai, Juke Mercedes-Benz Citan, A-B-CLA 180 CDI Suzuki Jimny			Bolt - 10.9 M9x1 L:42 mm	BMY0901CB 8 pcs. 10x6x4cm
				Con. Rod OEM : 770 147 5074	
			535 gr Torque : 60 Nm 2nd Torque Option : 20 Nm + 45 °	  	
2	Renault K9K 846, K9K 608, 872			Connecting Rod STD	BMY0902 1 pc.24x10x4cm
	Mercedes-Benz OM607, OM608			Connecting Rod SEMI	BMY0902SEMI 1 pc.24x10x4cm
	1.5 cc - R4			Bushing Bimetal Locked-Straight	BMY0901B 4 pcs. 10x6x4cm
	Euro 5/6			Bolt - 10.9 M9x1 L:42 mm	BMY0901CB 8 pcs. 10x6x4cm
	Used in forged-steel piston engines. Es wird in geschmiedeten Stahlkolbenmotoren. Dövmne çelik pistonlu motorlarda kullanılır.			Con. Rod OEM : 121008820R, 607 030 0420, 6070302100, 12100-00QAJ, 12100-00Q1J	
	Nissan Note, Micra Dacia Lodgy		560 gr Torque : 60 Nm 2nd Torque Option : 20 Nm + 45 °	  	
3	Renault, Dacia E7J			Connecting Rod STD	BMY0903 1 pc.24x10x4cm
	1,4 cc			Bolt - 10.9 M9x1 L:42 mm	
	R4			Con. Rod OEM : 7701465085, 8200454199	
	Fuel injected		510gr Torque : 60 Nm	  	
	Renault 9, 19, Clio I, II, Megane I, Express, Kangoo				
	Dacia Solenza, SuperNova				

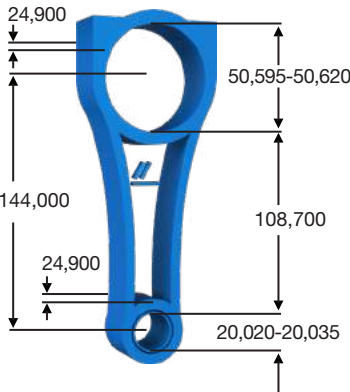
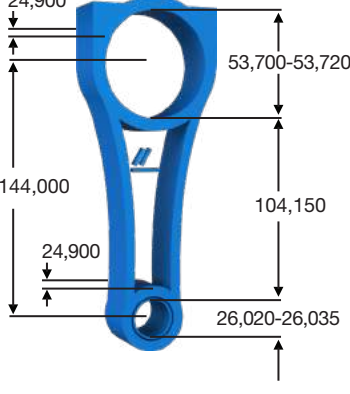
Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
4 Renault/Nissan R9M Mercedes-Benz OM626 Fiat/Opel/Vauxhall R9M 1.6 cc R4 Long Type Langer Typ Uzun Tip	Talisman, Fluence, Megane, Trafic Scenic, Koleos, Espace Qashqai, Juke X-Trail, NV300, C Class Vivaro Talento		675 gr Torque : 60Nm 2nd Torque Option : 20Nm+45°	Connecting Rod STD BMY0904 1 pc.24x10x4cm Connecting Rod SEMI BMY0904SEMI 1 pc.24x10x4cm Bushing Bimetal Locked-Straight BMY0916B 4 pcs. 10x6x4cm Bolt - 10.9 M9x1 L:42 mm BMY0901CB 8 pcs. 10x6x4cm Con. Rod OEM : 121001039R, 121004759R, 1210000Q1H, 626 030 0420	 
5 Renault G9U 2.5 cc R4	Renault Master II, Laguna Nissan Interstar Opel Movano		870 gr Torque : 60 Nm 2nd Torque Option : 20 Nm + 45 °	Connecting Rod STD BMY0913 1 pc.24x10x4cm Connecting Rod SEMI BMY0913SEMI 1 pc.24x10x4cm Bushing Bimetal Locked-Straight BMY0913B 4 pcs. 10x6x4cm Bolt - 10.9 M9x1 L:42 mm BMY0901CB 8 pcs. 10x6x4cm Con. Rod OEM : 770 147 3615	 
6 Renault F9Q 1.9 cc R4	Renault Master, Trafic, Laguna, Kangoo, Megane, Clio Opel Vivaro Mitsubishi Carisma, Spacestar Volvo S40 Suzuki Grand Vitara		670 gr Torque : 60 Nm 2nd Torque Option : 20 Nm + 45 °	Connecting Rod STD BMY0914 1 pc.24x10x4cm Connecting Rod SEMI BMY0914SEMI 1 pc.24x10x4cm Bushing Bimetal Locked-Straight BMY0914B 4 pcs. 10x6x4cm Bolt - 10.9 M9x1 L:42 mm BMY0901CB 8 pcs. 10x6x4cm Con. Rod OEM : 770 147 6250	 

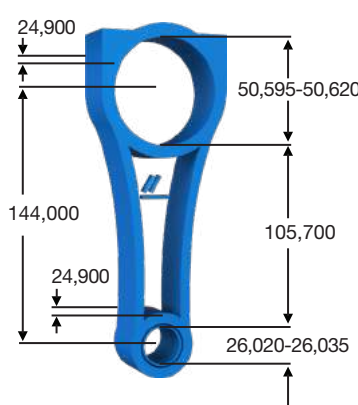
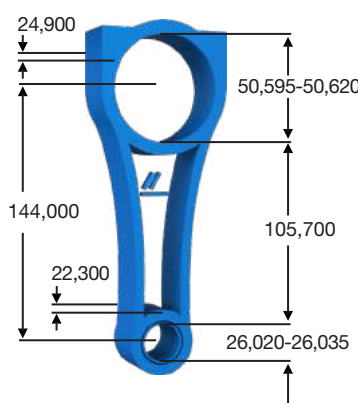
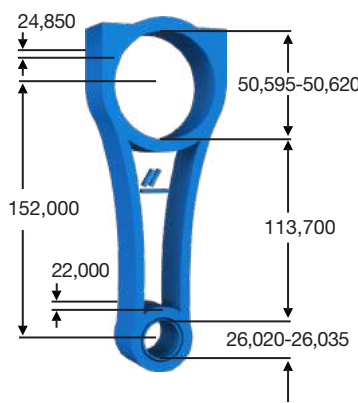
Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
7					
Renault M9R	Renault Megane, Laguna, Master, Trafic			Connecting Rod STD	BMY0915 1 pc.24x10x4cm
2.0 cc	Connecting Rod SEMI			BMY0915SEMI 1 pc.24x10x4cm	
R4	Nissan Qashqai, X-Trail			Bushing Bimetal Locked-Straight	BMY0915B 4 pcs. 10x6x4cm
				Bolt - 10.9 M9x1 L:42 mm	BMY0901CB 8 pcs. 10x6x4cm
				Con. Rod OEM : 770 147 7831	
			730 gr Torque : 60 Nm 2nd Torque Option : 20 Nm + 45 °		
					
8					
Renault M9R	Renault Megane, Laguna, Master, Trafic			Connecting Rod STD	BMY0916 1 pc.24x10x4cm
2.0 cc	Connecting Rod SEMI			BMY0916SEMI 1 pc.24x10x4cm	
R4	Nissan Qashqai, X-Trail			Bushing Bimetal Locked-Straight	BMY0916B 4 pcs. 10x6x4cm
				Bolt - 10.9 M9x1 L:42 mm	BMY0901CB 8 pcs. 10x6x4cm
				Con. Rod OEM : 7701476577, 12100-00Q0A	
			760 gr Torque : 60 Nm 2nd Torque Option : 20 Nm + 45 °		
					
9					
Renault G9T	Renault Laguna, Espace, Master, Trafic, Vel Satis			Connecting Rod STD	BMY0917 1 pc.24x10x4cm
2.2 cc	Connecting Rod SEMI			BMY0917SEMI 1 pc.24x10x4cm	
R4	Opel/Vauxhall Movano, Vivaro			Bushing Bimetal Locked-Straight	BMY0913B 4 pcs. 10x6x4cm
	Nissan Interstar, Primastar			Bolt - 10.9 M9x1 L:42 mm	BMY0901CB 8 pcs. 10x6x4cm
				Con. Rod OEM : 770 147 2847	
			873 gr Torque : 60 Nm 2nd Torque Option : 20 Nm + 45 °		
					

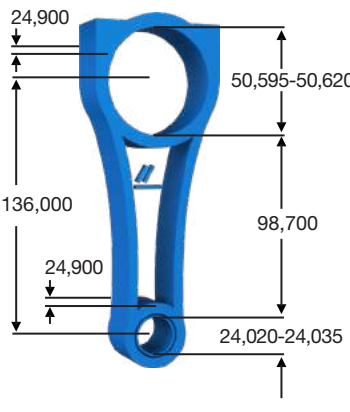
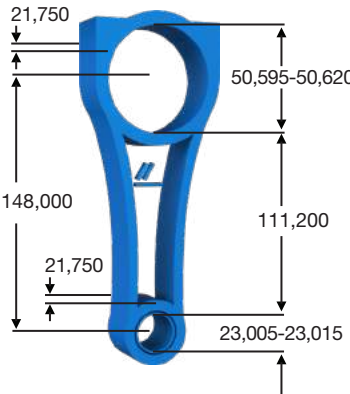
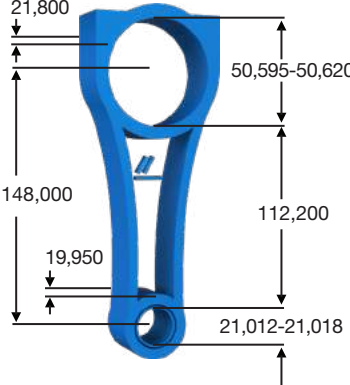
Engine Type	Models	Picture	Sizes (mm)	Products	BMV Reference
10 Renault M9T 2.3 cc R4	Renault Master, Koleos, Alaskan			Connecting Rod STD	BMV0918 1 pc.24x10x4cm
	Opel/Vauxhall Movano			Connecting Rod SEMI	BMV0918SEMI 1 pc.24x10x4cm
	Nissan NV400, Navara, Qashqai, X-Trail, Primastar			Bushing Bimetal Locked-Straight	BMV0915B 4 pcs. 10x6x4cm
	Mercedes-Benz X-Class			Bolt - 10.9 M9x1 L:42 mm	BMV0901CB 8 pcs. 10x6x4cm
				Con. Rod OEM : 121004942R	
		805 gr Torque : 60 Nm 2nd Torque Option : 20 Nm + 45 °			
11 Renault R9M Mercedes-Benz OM626 1.6 cc R4	Renault Talisman, Fluence			Connecting Rod STD	BMV0919 1 pc.24x10x4cm
	Dacia Duster, Logan, Sandero			Connecting Rod SEMI	BMV0919SEMI 1 pc.24x10x4cm
	Mercedes-Benz A, B, C, CLA-Class, Citan			Bushing Bimetal Locked-Straight	BMV0916B 4 pcs. 10x6x4cm
	Nissan Juke, Almera, Cube, Micra, Note			Bolt - 10.9 M9x1 L:42 mm	BMV0901CB 8 pcs. 10x6x4cm
				OEM : 121006304R, 121000425R, 95518876 Without Oil Hole	
		655 gr Torque : 60 Nm 2nd Torque Option : 20 Nm + 45 °			
12 Renault R9M Mercedes-Benz OM626 1.6 cc R4	Renault Talisman, Fluence			Connecting Rod STD	BMV0920 1 pc.24x10x4cm
	Dacia Duster, Logan, Sandero			Connecting Rod SEMI	BMV0920SEMI 1 pc.24x10x4cm
	Mercedes-Benz A, B, C, CLA-Class, Citan			Bushing Bimetal Locked-Straight	BMV0916B 4 pcs. 10x6x4cm
	Nissan Juke, Almera, Cube, Micra, Note			Bolt - 10.9 M9x1 L:42 mm	BMV0901CB 8 pcs. 10x6x4cm
				121006304R, 121000425R With Oil Hole	
		655 gr Torque : 60 Nm 2nd Torque Option : 20 Nm + 45 °			

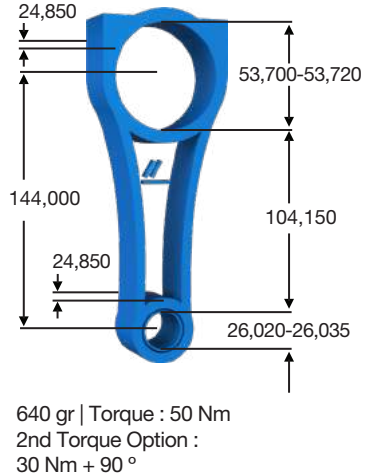
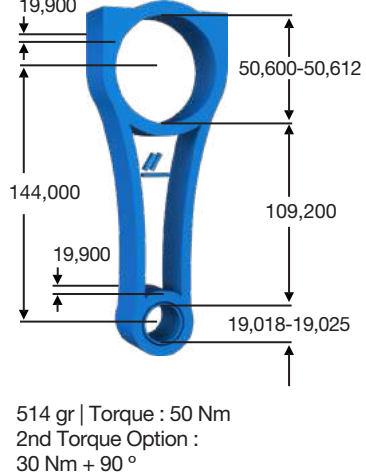
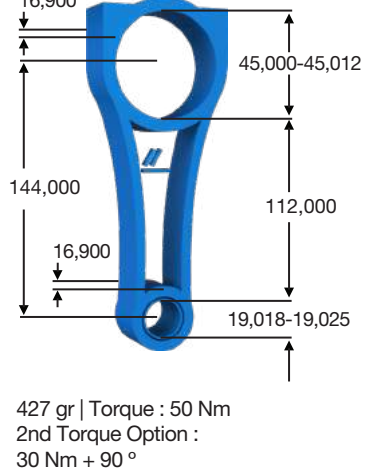


Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
13 Renault K4M 1.6 K4J 1.4 C1J, C2J, C3J, C6J, C2L 810 01/02/03/05/06 842 01, 847 05/06 Volvo B14, B14E	 Renault Clio I/III, Kangoo, Scenic I/II, Megane I/II, Laguna, Modüs, R9, R12 Volvo 340, 343, 345		 550gr Torque : 60 Nm	Connecting Rod STD Bolt - 10.9 M9x1 L:42 mm	BMY0921 1 pc.24x10x4cm Con. Rod OEM : 7701471281, 121009455R, 7701477612, 6001543049, 7701458393
					
14 Renault K7M 1.6 K7J 1.4 E6J 1.4 E5F 1.2 E7F 1.2	 Renault Clio, Megane II/Coupe, 19, Express Dacia Logan, Solenza		 530gr Torque : 60 Nm	Connecting Rod STD Bolt - 10.9 M9x1 L:42 mm	BMY0922 1 pc.24x10x4cm Con. Rod OEM : 121000999R, 7701476393
					
15 Renault, Nissan, Infiniti V9X 3.0 cc V6	 Renault Laguna III, Latitude Nissan Navara, Pathfinder Infiniti QX70D, FX30d, EX30d, M30d		 904gr Torque : 60 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L:50 mm	BMY0923 1 pc.30x12x4cm BMY0923SEMI 1 pc.30x12x4cm BMY0915B 4 pcs. 10x6x4cm BMY0901CB 8 pcs. 10x6x4cm Con. Rod OEM : 7701478766
					

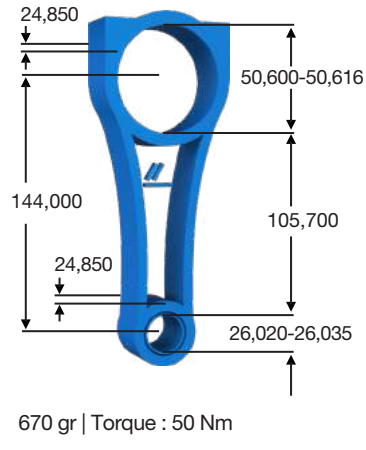
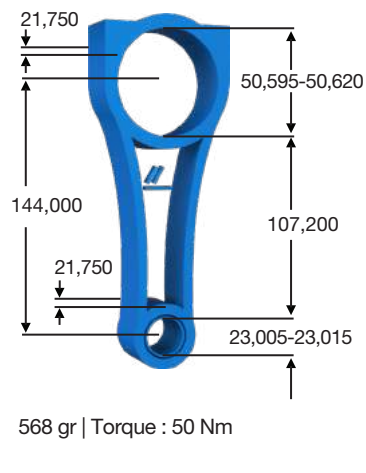
Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
1 Toyota Lexus 1VD-FTV Euro 4 4.5 cc V8	Land Cruiser LX			Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L:42 mm	BMY1901 1 pc.24x10x4cm BMY1901SEMI 1 pc.24x10x4cm BMY1901B 4 pcs. 10x6x4cm
2 Toyota 4A-F 1.6 cc R4	Corolla, Carina, Celica			Connecting Rod STD Bolt - 10.9 M9x1 L:42 mm	BMY1902 1 pc.24x10x4cm
3 Toyota 4A-FE 1.6 cc R4	Corolla, Carina, Celica, Avensis			Connecting Rod STD Bolt - 10.9 M9x1 L:42 mm	BMY1903 1 pc.24x10x4cm

Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
1 Volkswagen APT, AGN, ARG APU, AWU, AUM, AEB, BJX, BKF 1.8 cc R4 	Volkswagen Passat, Golf Bora, Jetta Audi A3, A4, A6, TT Seat Leon, Toledo, Ibiza Skoda Octavia, Superb		 560 gr Torque : 50 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt w. Nut- 12.9 M8x1 L:54 mm	BMY1001 1 pc.24x10x4cm BMY1001SEMI 1 pc.24x10x4cm BMY1001B 4 pcs. 10x6x4cm Con. Rod OEM : 027 198 401 B 027 198 401 D 
2 Volkswagen/Audi Seat/Skoda, AXD, AXE, AZV, BAC, BGW, BHW, BJJ, BJK, BJL, BJM, BKD, BLJ, BLK, BMM, BMN, BMP, BNZ, BPC, BPD, BPW, BPE, BPZ, BRT, BSS, BSV, BVH, BWW, CAAA, CAAB, CAAC, CAAD, CAAE, CBAA, CBAB, CBAC, CBBA, CBBB, CBDA, CBDB, CBDC, CBEA, CBHA, CBJA, CBJB, CBKA, CCHA, CCHB, CDBA, CDCA, CEBA, CEBB, CECA, CECB, CEGA, CFCA, CFFA, CFFB, CFFD, CFFE, CFGB, CFGC, CFGD, CFHA, CFHB, CFHC, CFHD, CFHE, CFHF, CFJA, CFJB, CJAA, CJDA, CJDD, CKRA, CKTB, CKTC, CKUB, CKUC, CLCA, CLCB, CLJA, CLLA, CLLB, CNEA, CNFA, CNFB, CSHA, CSLB, CSNA 2.0 - 2.5 cc R4  	Volkswagen Crafter, Passat, Transporter Audi A4, A6, A8 Seat Toledo, Leon Skoda Octavia, Superb		 670 gr Torque : 50 Nm 2nd Torque Option : 30 Nm + 90 °	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M8x1 L:44 mm	BMY1002 1 pc.24x10x4cm BMY1002SEMI 1 pc.24x10x4cm BMY1002B 4 pcs. 10x6x4cm BMY1002CB 8 pcs. 10x6x4cm Con. Rod OEM : 038 105 401 J 038 198 401 D, 038 198 401 E, 038 198 401 F 

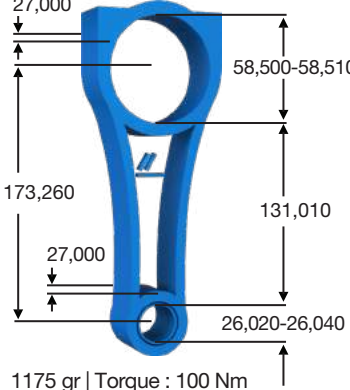
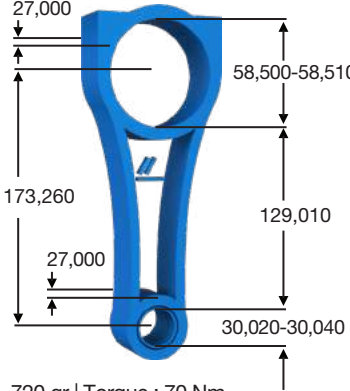
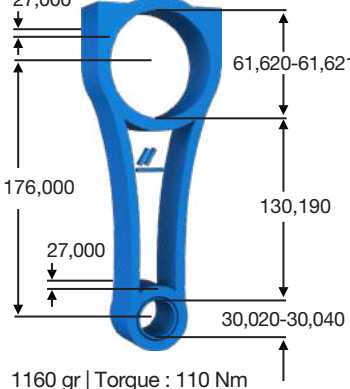
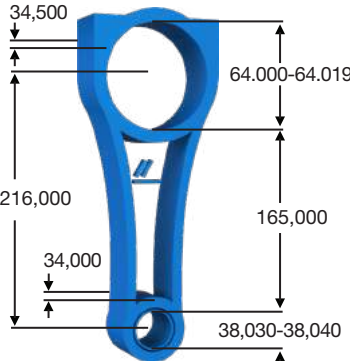
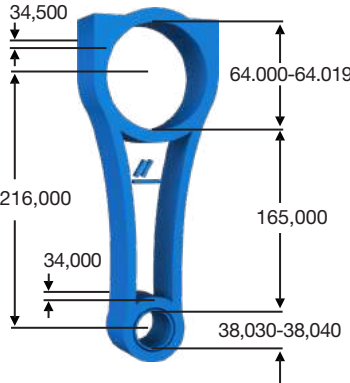
Engine Type	Models	Picture	Sizes (mm)	Products	BMV Reference
3 Volkswagen BSU, ATJ, BRU, BSW, AUY, ARL, ANU, BTB, AVQ, AVB, BLS, BXE, BXF, BXJ, BMT Audi ANU, ATJ, AVB Seat BJB, BLS, BXE, BXF, BXJ Skoda BJB, BLS, BXE 1.9 cc R4	Volkswagen Caddy, Passat, Jetta, Bora, Touran Audi A4, A6 Seat Toledo, Leon, Altea, Ibiza Skoda Octavia, Superb		 635 gr Torque : 50 Nm 2nd Torque Option : 30 Nm + 90 °	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M8x1 L:44 mm Con. Rod OEM : 038 105 401 G, 038 198 401 H	BMV1003 1 pc.24x10x4cm BMV1003SEMI 1 pc.24x10x4cm BMV1002B 4 pcs. 10x6x4cm BMV1002CB 8 pcs. 10x6x4cm
  		  			
4 Volkswagen Audi/Seat BAY, BMS, BNM BNV, BWB, AMF, CUSA, CUSB, CUTA 1.4 cc R3	Volkswagen Polo, Lupo Audi A2 Seat Ibiza, Leon		 610 gr Torque : 50 Nm 2nd Torque Option : 30 Nm + 90 °	Connecting Rod STD Connecting Rod SEMI Bolt - 10.9 M8x1 L:44 mm Con. Rod OEM : 045 198 401 B , 045 198 401 C, 045 198 401 A, 04B 105 401, 045 198 401 B/C	BMV1004 1 pc.24x10x4cm BMV1004SEMI 1 pc.24x10x4cm BMV1002CB 8 pcs. 10x6x4cm
 		  			
5 Volkswagen Audi/Seat/Skoda CAYA, CAYB, CAYC, CAYE, CLHA, CRKA, CFWA 1,2 - 1,6 cc R3 - R4	Volkswagen Caddy, Golf Jetta, Passat Polo 1.2TDI Audi A3 Seat Ibiza, Leon Skoda Octavia, Superb		 630 gr Torque : 50 Nm 2nd Torque Option : 30 Nm + 90 °	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M8x1 L:44 mm Con. Rod OEM : 03L 105 401 A	BMV1005 1 pc.24x10x4cm BMV1005SEMI 1 pc.24x10x4cm BMV1002B 4 pcs. 10x6x4cm BMV1002CB 8 pcs. 10x6x4cm
 		  			

Engine Type	Models	Picture	Sizes (mm)	Products	BMV Reference
6 Volkswagen Audi CR, CS, CY, JX, KY, ME, MF, SB, 68A, 68B, 68C, ADK 1,6 - 1,7 cc R4	Volkswagen T3, Golf, Jetta, Santana, Rabbit Audi 80, 90, 4000		 630 gr Torque : 60 Nm	Connecting Rod STD Bushing Bimetal Locked-Straight Bolt - 10.9 M9x1 L : 46mm	BMV1006 1 pc.24x10x4cm BMV1006B 4 pcs. 10x6x4cm
				Con. Rod OEM : 068 198 401 D	
				  	
7 Volkswagen BZB, CABD, CDAA, CDAB, CDHA, CDHB, CJEB, CHED, CJEE, CJSA, CJSB, CJSC, CNSA, CNSB, CPKA, CPRA, CYGA, DAJA, DAJB, 1,8 cc TFSI R4	Volkswagen Passat, Jetta, Polo, Golf, Beetle, CC, Sharan Audi A1, A3, A4, A5, A6, TT Skoda Superb, Octavia, Yeti Seat Altea, Leon, Toledo, Exeo, Alhambra		 565 gr Torque : 50 Nm	Connecting Rod STD Bolt - 10.9 M8x1 L:47 mm	BMV1007 1 pc.24x10x4cm
				Con. Rod OEM : 06J 198 401 H, 06J 198 401 D	
				  	
8 Volkswagen Seat/Skoda BZB, CEA, CEAA, CGYA, BYJ Audi BYT, BZB, CABA, CABB, CABD 1,8 cc TSI, TFSI R4	Volkswagen Tiguan, Passat, CC Audi A3, A4, A5 Skoda Superb, Octavia Seat Altea/XL, Leon, Toledo VW FAW Magotan, Sagitar		 520 gr Torque : 50 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M8x1 L: 47 mm	BMV1008 1 pc.24x10x4cm BMV1008SEMI 1 pc.24x10x4cm BMV1008B 4 pcs. 10x6x4cm
				Con. Rod OEM : 06H 198 401 Q, 06J 198 401 F, 06J 198 401 K	
				  	

Engine Type	Models	Picture	Sizes (mm)	Products	BMV Reference
9	Volkswagen/ Audi/Skoda CNHA, CNHC, CRLB, CRLD, DDAA 2,0 cc R4			Connecting Rod STD	BMV1009 1 pc.24x10x4cm
				Connecting Rod SEMI	BMV1009SEMI 1 pc.24x10x4cm
10	Volkswagen BLG, BMV, BWK, CAVA, CAVB, CAVC, CAVD, CAVE, CAXA, CDGA, CKMA, CMSB, CNWA, CTHA, CTHB, CTHC, CTHD, CTHE, CTKA, DAGA, Audi CAVG, CAXA, CAXC, CNVA, CTHG, Seat CAVA, CAVE, CAVF, CAXA, CAXC, CNUB, CNWB, CTHA, CTHE, CTHF, CTJB, CTJC Skoda CAVE, CAXA, CAXC, CTHE 1,4 cc TSI R4			Bushing Bimetal Locked-Straight	BMV1002B 4 pcs. 10x6x4cm
				Bolt - 10.9 M8x1 L:44 mm	BMV1002CB 8 pcs. 10x6x4cm
11	Volkswagen CBZA, CBZB, CYA, CYVB, DJN Audi CBZA, CBZB, CYVA, Seat CBZA, CBZB Skoda CBZA, CBZB, CYVA, DJNB 1,2 cc TSI R4			Connecting Rod STD	BMV1011 1 pc.24x10x4cm
				Connecting Rod SEMI	BMV1011SEMI 1 pc.24x10x4cm
12	Volkswagen CBZA, CBZB, CYA, CYVB, DJN Audi CBZA, CBZB, CYVA, Seat CBZA, CBZB Skoda CBZA, CBZB, CYVA, DJNB 1,2 cc TSI R4			Bushing Bimetal Locked-Straight	BMV1011B 4 pcs. 10x6x4cm
				Bolt - 10.9 M8x1 L:44 mm	BMV1002CB 8 pcs. 10x6x4cm

Engine Type	Models	Picture	Sizes (mm)	Products	BMV Reference
12 Volkswagen/ ACV, ACV, AGX, AHD, AHY, AJT, ANF, ANG, ANH, ANJ, APA, AUF, AVR, AFN, AVG Audi 1T, AAT, ABP, AEL 2.5cc TDI R5	LT28, LT35, Transporter T4 A6, A6 Avant, 100		 670 gr Torque : 50 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M8x1 L:44 mm	BMV1012 1 pc.24x10x4cm BMV1012SEMI 1 pc.24x10x4cm BMV1012B 4 pcs. 10x6x4cm BMV1002CB 8 pcs. 10x6x4cm
Con. Rod OEM : 028 198 401 H, 028 198 401 F, 074 198 401 B, 028H    FORGE CRACKED STRAIGHT					
13 Volkswagen/ Seat, Skoda CAWA, CAWB, CBFA, CCTA, CCZA, CCZB, CCZC, CCZD, CDAB, CFPA, CHHA, CHHB, CJKK, CJKB, CJXA, CJXB, CJXC, CJXD, CJXE, CJXG, CNTC, CULA, CULC, CYFB, CZPA, CZPB, DEDA, DJHA, CHHB Audi CPMB, CPSA, CULB, CULC, CVJA, CVKB, CWZA, CYFB, CYMC, CYNB, CYPB, CYPB, CYRB, CYRC, CZPB, DJHA, CESA, DKNA, DLHB, CAEA, CAEB, CAED, CAWB, CBFA, CCTA, CCZA, CCZC, CDNB, CDNC, CFKA, CHHB, CHHC, CHJA, CJXB, CJXC, CJXD, CJXF, CJXG, CNCB, CNCD, CNCE, CNTC, CPMA Porsche DKNA, DLHB, MCN.CC, MCY.NA, MCY.NB, MCY.PA 2.0 cc TFSI/TSI/ FSI R4	Passat, Golf, Multivan, CC, Scirocco, Eos Bettle, Jetta, Sharan, Transporter Caravelle, Bora, Vento Tiguan,T-Roc, Amarok A1, A2, A3, A4, A5, A6, A7, Q2, Q3, Q5, Q7, TT Mecan Leon, Altea, Alhambra, Ateca Superb, Kadiah, Octavia, Yeti		 568 gr Torque : 50 Nm	Connecting Rod STD Bolt - 10.9 M8x1 L: 47 mm	BMV1013 1 pc.24x10x4cm Con. Rod OEM : 06H 198 401 D, 06J 198 401 B 06LB, 06LJ, 06LL
Con. Rod OEM : 06H 198 401 D, 06J 198 401 B 06LB, 06LJ, 06LL   FORGE CRACKED TAPERED					

Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference	
14						
Audi CZZA/B,CLZB, CZVA/B/C/D/E/F, CVUA/B/C, CUEA,CRCA, CTCB/C, CTBA/B/ C/D CRTC/D/E/F CPNA/B,CCLA CNRB, CMHA CLAA/B, CJMA, CKVB/C/D, CGQB, CDUC/D, CDTA/B/C	Audi A4, A5, A6, A7, A8, SQ5, Q7, SQ7, Q8 Porsche Panamera, Cayenne, Macan Volkswagen Touareg		715 gr Torque : 45Nm 2nd Torque Option : 35Nm +90°	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M8x1 L:47 mm Con. Rod OEM : 059198401N, 059198401H, 59AE	BMY1014 1 pc. 30x12x4cm BMY1014SEMI 1 pc. 30x12x4cm BMY1014B 4 pcs. 10x6x4cm BMY1014CB 8 pcs. 10x6x4cm	
Porsche MCVA/B/C, MCTBA/B/C/D, MCRC-/A/B/C MCRNB, MCDUD						
Volkswagen CVWA, CVVA, CRCA, CRCD, CNRB, CJMA						
3.0 TDI						
V6						
				FORGE	CRACKED	TAPERED
15						
Audi CAJA, CAKA, CCAA, CCBA, CMDA, CGWA/B/ C/D, CGXA/B/C, CHMA/B, CJTB/C, CJWB/C/E, CMUA, CNAA, CREA/C/D, CREG/H, CTDA, CTTA, CTUA/B/C/D, CTVA, CTXA, CTWA/B, CWGD, DLZA CZSA/E, DCBD/E	A4, A5, A6, A7, A8, Q7, Q8, TT Bentayga Cayenne, Panamera Touareg		580 gr Torque : 45 Nm	Connecting Rod STD Connecting Rod SEMI Bushing Bimetal Locked-Straight Bolt - 10.9 M8x1 L:47 mm Con. Rod OEM : 06E198401J, 06E198401D, 06E198401E	BMY1015 1 pc. 24x10x4cm BMY1015SEMI 1 pc. 24x10x4cm BMY1015B 4 pcs. 10x6x4cm	
Bentley, Porsche DCBE, DLZB, MCX.TA, MDC.BE						
Volkswagen CGEA, CGFA, CJTA, CPFA, CYJA, DCBE						
3.0 TFSI						
V6						
				FORGE	CRACKED	TAPERED

Engine Type	Models	Picture	Sizes (mm)	Products	BMY Reference
1 Deutz BFL 1011 R4	  		 27,000 58,500-58,510 173,260 131,010 27,000 26,020-26,040 1175 gr Torque : 100 Nm	Connecting Rod STD Con. Rod OEM : 0428 6691  	BMY0301 1 pc.30x12x6cm
2 Deutz BFL 1011/F R4	  		 27,000 58,500-58,510 173,260 129,010 27,000 30,020-30,040 720 gr Torque : 70 Nm	Connecting Rod STD Con. Rod OEM : 0427 2007, 0417 8999  	BMY0302 1 pc.30x12x6cm
3 Deutz TD/TCD 3.6 L4 1011N, TD2011 Euro III, IV, V R4	  		 27,000 61,620-61,621 176,000 130,190 27,000 30,020-30,040 1160 gr Torque : 110 Nm	Connecting Rod STD Con. Rod OEM : 0428 6940  	BMY0303 1 pc.30x12x6cm
4 Deutz/KHD, Deutz Fahr, Fendt BF 6L 912, F 2L 912, F 3L 912 D, F 3L 912 W, F 4L 912D/W, F 5L 912 D, F 6L 912 D/W	  		 34,500 64,000-64,019 216,000 165,000 34,000 38,030-38,040 1800 gr Torque : 20 Nm+60°+30°	Connecting Rod STD Con. Rod OEM : 0415 0450, 0337 1614  	BMY0304 1 pc. 24x10x4cm

BMV CONNECTING ROD

Manufacturer: Basaran Motor Ltd. Şti.
Marketing Co: BMV İç ve Dış Tic. Ltd. Şti.

Address: Büyükkayacık OSB Mah. 15. Sk.
No: 3 42160 Konya, Turkey

Tel : +90 332 251 55 65

Fax: +90 332 251 24 26

Web: www.bmv.com.tr

General Information & Sales: bmv@bmv.com.tr

Latin America Sales: latin@bmv.com.tr

Eurasia Sales: eurasia@bmv.com.tr

M: +90 552 312 05 42

Domestic Sales - Support

Inlandsverkäufe - Förderung

Yurtiçi Satış - Destek:

satisdestek@bmv.com.tr

M: +90 506 487 28 51

