





Spicer® – Demand the Best. **Demand Genuine Spicer.**

For more than a century, the Spicer® name has built a legacy of success with quality drivetrain solutions. Genuine Spicer products are manufactured to the same high standards as Original Equipment because in most cases, they are OE parts. We offer a variety of drivetrain solutions and service parts for light vehicle, commercial vehicle, off-highway, military, industrial, and performance applications.

Aftermarket Products

Dana manufactures Spicer driveshafts, axles, transmission parts, and related components for light-vehicle, commercial vehicle, off-highway, military, industrial, and performance applications. This product line includes driveshafts formerly branded as GWB™ and Italcardano™ while legacy axle/ transmission marques include Clark™, Clark Hurth™, Comaxle™, Sige, and Kirkstall™.



Market Applications:

- Light Vehicle
- Passenger Cars / SUVs / Pickup Trucks / CUVs / Light Commercial Vehicles
- Commercial Vehicle
- Medium and Heavy Trucks / Buses
- Construction / Agricultural / Forestry / Mining / Material Handling / Industrial



Online Catalog

DanaAftermarket.com



Service Center Network

SpicerParts.com /en-emea/servicecenters



Literature Library

SpicerParts.com/en-emea/literature-library



Facebook

www.facebook.com/ SpicerPartsEMEA



YouTube

www.youtube.com/@spiceremea7744



LinkedIn

www.linkedin.com /showcase/spicer-emea

Heavy Duty Driveshafts

Every original Spicer® driveshaft is designed, engineered, and manufactured by Dana to the highest standards of quality and performance expected by original equipment (OE) manufacturers - because Spicer is THE original equipment manufacturer. Spicer driveshafts provide the top performance, reliability and durability of OE products, in a robust, cost-effective, virtually maintenance-free aftermarket solution.

As the global leader in driveline technology, Dana combines its commitment to innovation and original equipment excellence with the quality of its Spicer products to deliver superior solutions that are driving the aftermarket industry.

Spicer Product Line:

Driveshafts

- Complete driveshafts
- Driveshaft components
- U-joints
- Flanges
- Tube yokes
- Center bearings
- Tubes
- Tight joints

- Single reduction/non-drive axles
- Independent carriers
- Agricultural planetary axles
- Industrial planetary axles
- Portal axles
- Differentials
- Ring and pinions
- Gearing

Transmissions

- Powershift Transmissions
- Hydrostatic Transmissions
- Mechanical Transmissions
- Transfer Cases
- Torque Converters
- Electronic controls



DanaAftermarket.com

Spicer Materials Suitable For

Scania Applications

Dana has a long history of supplying Spicer driveshafts for Scania heavy-duty commercial vehicles as an original equipment manufacturer, using specialized equipment and proprietary manufacturing processes including friction welding to meet the unique needs of Scania vehicles.

Spicer driveshaft components were also adapted for Scania's aftermarket replacement needs, utilizing MIG/MAG welding for universal fabrication, scalability and production, while keeping the original equipment properties, dimensions, and quality of the driveshaft components intact.

Spicer original driveshaft components are now available for virtually every Scania model currently in production, and to service all of Scania's original equipment and aftermarket vehicle needs.

Select your Spicer for Scania replacement driveshaft components – or build your own driveshaft from Spicer components. Components to build Spicer driveshafts for Scania – from the U-joints to the tuber and more – are now available for the aftermarket.

Select the Spicer original driveshaft components you need, or build your own OE driveshaft from 100% Spicer original parts. Visit the Spicer website at www.SpicerParts.com, select your components, and start building your complete Spicer driveshaft package.

See the next page for a complete list of Dana Spicer driveshaft components for Scania Heavy Duty Commercial Vehicles. All Spicer products are shipped from Dana's European Distribution Center in Györ, Hungary.

To stay up-to-date on Spicer products and news, subscribe to our newsletter

SpicerNews.com.

Check out more **DanaAftermarket.com**

	Spicer Part Number	All Series
0	F-10001-00	Nut
2	B-10005-00	Center Bearing Assembly
3	C-10003-00	Outer Flinger

	Spicer Part Number	Suitable for Scania P300
4	U-10058-00	U-Joint - Service Free
4	U-10058-20	U-Joint with bolts - Service Free
4	U-10059-00	U-Joint - Lube
4	U-10059-20	U-Joint with bolts - Lube
6	G-10007-20	Tube yoke - MIG/MAG
10	H-10010-00	End Yoke
10	H-10010-10	End Yoke with bolts
7	M-10009-20	Midship stub shaft - MIG/MAG
8	S-10016-20	Slip Joint w/o U-Joint - MIG/MAG
9	T-10081-00	Tube - 89 X 4 mm

	Spicer Part Number	Suitable for Scania P400
4	U-10060-00	U-Joint - Service Free
4	U-10060-20	U-Joint with bolts - Service Free
4	U-10061-00	U-Joint - Lube
4	U-10061-20	U-Joint with bolts - Lube
6	G-10001-20	Tube yoke - MIG/MAG
10	H-10001-00	End Yoke
10	H-10001-10	End Yoke with bolts
7	M-10006-20	Midship stub shaft - MIG/MAG
8	S-10006-20	Slip Joint w/o U-Joint - MIG/MAG
9	T-10079-00	Tube - 100 X 4,75 mm

	Spicer Part Number	Suitable for Scania P420
4	U-10060-00	U-Joint - Service Free
4	U-10060-20	U-Joint with bolts - Service Free
4	U-10061-00	U-Joint - Lube
4	U-10061-20	U-Joint with bolts - Lube
6	G-10008-20	Tube yoke - MIG/MAG
8	S-10018-20	Slip Joint w/o U-Joint - MIG/MAG
9	T-10062-00	Tube - 91 X 4,5 mm

	Spicer Part Number	Suitable for Scania P500
4	U-10062-00	U-Joint - Service Free
4	U-10062-20	U-Joint with bolts - Service Free
4	U-10063-00	U-Joint - Lube
4	U-10063-20	U-Joint with bolts - Lube
6	G-10002-20	Tube yoke - MIG/MAG
10	H-10003-00	End Yoke
10	H-10003-10	End Yoke with bolts
7	M-10007-20	Midship stub shaft - MIG/MAG
8	S-10009-20	Slip Joint w/o U-Joint - MIG/MAG
9	T-10080-00	Tube - 108 X 5,5 mm



	Spicer Part Number	Suitable for Scania P520
4	U-10062-00	U-Joint - Service Free
4	U-10062-20	U-Joint with bolts - Service Free
4	U-10063-00	U-Joint - Lube
4	U-10063-20	U-Joint with bolts - Lube
6	G-10009-20	Tube yoke - MIG/MAG
8	S-10019-20	Slip Joint w/o U-Joint - MIG/MAG
9	T-10062-00	Tube - 91 X 4,5 mm

	Spicer Part Number	Suitable for Scania P600
6	U-10064-00	U-Joint - Service Free
6	U-10065-00	U-Joint - Lube
10	E-10001-00	XS Flange Yoke
6	G-10004-20	Tube yoke - MIG/MAG
10	H-10005-00	End Yoke
10	H-10005-10	End Yoke with bolts and plated
10	H-10006-00	Companion Flange
7	M-10008-20	Midship stub shaft - MIG/MAG
8	S-10012-20	Slip Joint w/o U-Joint - MIG/MAG
9	T-10055-00	Tube - 114,3 X 5,5 mm

 \neg 4

Spicer Driveshafts For

Mercedes 385.60-Series

Spicer® Relaunches Driveshafts for Mercedes-Benz Trucks

For decades, Dana has been the original-equipment (OE) supplier of driveshafts for Mercedes-Benz heavy-duty commercial vehicles. After seeing increased demand for an OE quality version of the Mercedes-Benz driveshafts, Dana has decided to leverage its strong history with the platform and reactivate its 385.60 series driveshafts to support commercial truck customers.

Using state-of-the-art equipment, proprietary manufacturing processes, the newest technical specifications, and delivering the desired OE quality that Dana is known for, the company is offering both 100% Spicer original parts and components that make up the driveshaft and the finished OE-quality driveshafts.

With its robust and trusted engineering skills and expertise, Dana is producing and selling the complete range of ISR-technology-based components, and offering customers the option to purchase subassemblies to alleviate assembly activities and the complete shaft themselves.

These new offerings are available from its European Distribution Center in Győr, Hungary. More so, the driveshafts are available via the Spicer ReadyShaft™ Program, which is aimed at driving commercial and off-highway vehicle uptime by conveniently providing next-day pickup of warrantied, world-class Spicer driveshaft assemblies.

Complete materials related to the 385.60 series driveshafts are available on **TecDoc** and **DanaAftermarket.com**.



Check out more **DanaAftermarket.com**

Spicer Material	Description	Bearing Cup Ø [mm]	Span [mm]	Snap ring span mm]	Retainer Type	U-Joint Type	Flange	Flange Height [mm]	No. of Holes	Holes Ø [mm]	Length [mm]	Move ment [mm]	Suitable for tube with outer 0: [mm]	Tube wall thickness [mm]		CB Ø [mm]	CB Width [mm]	CB Height [mm]	Bracket Holes Distance [mm]	Mounting Holes [mm]	Thread [mm]
1 7385600600240	U-Joint	68	166	89	ISR	Lube															
7385600600160	U-Joint	68	166	89	ISR	Service Free															
2 B-10029-00	Center Bearing Assembly															70	20	90.5	35.5	4 square nuts 19x19mm, M12x1.5	M12x1.5
3 E-10004-00	Flange Yoke XS				ISR		XS 180	97	4	15.1											
4 H-10015-00	Companion Flange XS						XS 180	101.5	4	15.1											
6 G-10021-00	Tube Yoke				ISR						115		110	6							
6 G-10022-00	Tube Yoke				ISR						115		140	5							
6 M-10033-00	Midship Stub Shaft										148		110	6							M20x1.5x75
6 M-10034-00	Midship Stub Shaft										155		140	5							M20x1.5x7
7 S-10111-00	Slip Joint XS				ISR	Lube					378	150	110	6	Greaser on cover tube.						
7 S-10112-00	Slip Joint XS				ISR	Lube					393	150	140	6	Greaser on cover tube.						
1 C-10258-00	Washer																				M20x1.5x75
9 F-10014-00	Bolt																				
S S-10222-00	Slip Joint XS				ISR	Service Free	XS 180	97	4	15.1	475	150	140	5	Greaser on cover tube.						
S S-10223-00	Slip Joint XS				ISR	Service Free	XS 180	97	4	15.1	490	150	110	6	Greaser on cover tube.						
M-10057-00	Midship Assembly XS						XS 180	101.5	4	15.1	250		110	6		70	20	90.5	35.5	4 square nuts 19x19, M12x1.5	
M-10058-00	Midship Assembly XS						XS 180	101.5	4	15.1	257		140	5		70	20	90.5	35.5	4 square nuts 19x19, M12x1.5	
P-10086-00	Fix Joint XS				ISR	Service Free	XS 180	97	4	15.1	212		110	6							
P-10085-00	Fix Joint XS				ISR	Service Free	XS 180	97	4	15.1	212		140	5							
P-10087-00	Fix Joint XS				ISR	Lube	XS 180	97	4	15.1	212		110	6							
P-10088-00	Fix Joint XS				ISR	Lube	XS 180	97	4	15.1	212		140	5							
S-10228-00	Slip Joint XS				ISR	Lube	XS 180	97	4	15.1	475	150	140	5	Greaser on cover tube.						
S S-10229-00	Slip Joint XS				ISR	Lube	XS 180	97	4	15.1	490	150	110	6	Greaser on cover tube.						

Commercial Vehicle and Off-Highway Spicer Ready Shaft™ Program

Driveshaft Assemblies Next-Day Shipment



When your vehicle is down, Dana is there to meet your need for a fast-turnaround replacement driveshaft solution. Spicer ReadyShaft™ offers the convenience that you demand, providing world-class driveshaft assemblies that are made available within one business day of order and feature warranty coverage. Get your vehicle back on track quickly with a driveshaft built with Genuine Spicer® parts.




ReadyShaft™ Next-Day Shipment

Valuable time and money can be lost while awaiting replacement parts after a driveshaft fails. With the Spicer ReadyShaft™ Program, Dana offers pickup by the next business day—so you'll never have to worry about when a driveshaft will arrive. If you need help with ordering, we are here to make the process easy.



Search for What You Need

- By reference
- By dimension




Already Packed

- For easy shipping
- For easy forwarding
- For storage



Order Your Way

- Log onto DanaAftermarket.com
- Call customer operations
- Call custoffier operations



Driveshaft Arrives

• Ready for installation

Spicer ReadyShaft™ Benefits:

- Convenience of next-day shipment from receipt of order
- Seamless ordering process
- Thousands of parts in program, daily increasing
- Driveshaft built with Genuine Spicer components
- Built to OE specifications
- Eliminates the need for stocking replacement driveshafts
- Sturdy, secure cardboard tube packaging
- Available for many popular driveshaft series including Compact, Compact Plus, Wing Style and many more!



For more information on this or any other Spicer driveline products, contact your sales representative or visit SpicerParts.com.


For Trucks And Buses From 8-60 Tonnes Spicer[®] Compact[™] Plus

Dana Brings its Reliable Spicer® Compact™ **Series Plus Driveshafts to the Aftermarket**

Leveraging its extensive expertise in driveshaft design, Dana introduces its Spicer® Compact™ Series Plus driveshafts to the aftermarket worldwide. Spicer Compact Series Plus driveshafts are the world's lightest steel driveshafts in their class, helping original-equipment manufacturers meet efficiency standards.

Engineered to Reduce Weight and Extend Life

Designed to help commercial vehicles meet increasingly stringent global environmental regulations, this next-generation technology offers innovative engineering advancements that reduce weight by up to 10 percent and increase the life of the driveshaft by as much as 25 percent.

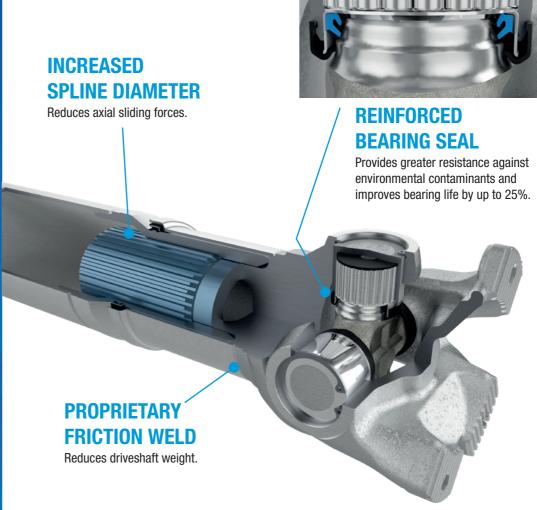

Check out more DanaAftermarket.com

Specifications	Spicer® Compact™ Series Plus Driveshaft														
	20	40	20	45	2047	2055	2060	2065							
Functional Limit Torque (KNm)	1	4	1	7	19	25	30	35							
Connection	XS	150	XS	180	XS 180	XS 180	XS 180	XS 180							
Optional	XS	180	XS	150	XS 150	-	-	-							
Flange-ø (mm)	15	55	1	80	180	180	180	180							
Max. Joint Angle (°)	27	44	27	44	27	27	30	27							
Max. Rotation-ø (mm)	16	60	1	74	174	178	196	206							
Standout (mm)	82	102	87	108	87	92	100	105							
Compressed Length (mm)	550	695	582	730	582	619	641	677							
Sliding Movement (mm)	110	180	110	180	110	110	110	110							
Tube (mm)	119.4x2.7	99.2x4.1	118.8x3.4	108.2x4.1	118.2x4.1	118.4x5.2	128.4x5.2	140.2x5.1							
Weight of 1m-Shaft (kg)	29.21	33.68	35.36	40.92	36.24	44.25	50.55	62.72							
Weight of 1m-Tube (kg)	7.77	9.62	9.68	10.53	11.54	14.52	15.8	16.99							

Increase the performance of your commercial vehicle and reduce driveline weight with the Spicer® Compact™ Series Plus driveshaft.

To learn more visit Dana.com/cv

Superior Vehicle Efficiency, **Performance, and Reliability**

In addition to significant weight savings, Spicer® Compact™ Series Plus, the lightest steel driveshaft in its class, also enhances vehicle performance, offers extended product life, increases part durability, and improves sealing performance. A variety of new and existing processes are used to design and manufacture this family of driveshafts, creating an optimized system, unlike other products currently available in the market.

Product features include:

- Upgraded sealing package for 25% greater durability
- Lightweight slip member reduces sliding force for improved noise, vibration, and harshness (NVH) and less component wear
- Advanced tubing design engineered with high strength material for reduced weight
- Optimized center bearing design with wider support ring and more reliable labyrinth seal for superior performance and reliability



Spicer PN (Part Number)	Descr.	Series	Bearing Cup (Ø mm)	Span (mm)	U-Joint (Type)	U-Joint (Grease)	Length [mm]	Slip [mm]	Max Angle	Flange Type	Holes	Holes (Ø mm)	Tube	Tube Dim [mm]	Mtg Holes [mm]	Mtg Dist [mm]	CB Height [mm]	CB width	CB (Ø mm)	Shore	Remark
U-10074-00	U-Joint	COMPACT PLUS 2040	47.6	135.3	Service Free	XD															
U-10075-00	U-Joint	COMPACT PLUS 2040	47.6	135.3	Lube	STD															
U-10085-00	U-Joint	COMPACT PLUS 2040	47.6	135.3	Lube	STD															With cover on lubricator
U-10096-00	U-Joint	COMPACT PLUS 2040	47.6	135.3	Lube	STD															1 Bearing Cup with lubricator
U-10101-00	U-Joint	COMPACT PLUS 2040	47.6	135.3	Lube	STD															2 Bearing Cups with lubricator
U-10106-00	U-Joint	COMPACT PLUS 2040	47.6	135.3	Lube	STD															4 Bearing Cups with lubricator
U-10087-00	U-Joint	COMPACT PLUS 2045/47	52	147.3	Service Free	STD															
U-10088-00	U-Joint	COMPACT PLUS 2045/47	52	147.3	Service Free	XD															
U-10080-00	U-Joint	COMPACT PLUS 2045/47	52	147.3	Lube	STD															
U-10086-00	U-Joint	COMPACT PLUS 2045/47	52	147.3	Lube	STD															With cover on lubricator
U-10097-00	U-Joint	COMPACT PLUS 2045/47	52	147.3	Lube	STD															1 Bearing Cup with lubricator
U-10102-00	U-Joint	COMPACT PLUS 2045/47	52	147.3	Lube	STD															2 Bearing Cups with lubricator
U-10107-00	U-Joint	COMPACT PLUS 2045/47	52	147.3	Lube	STD															4 Bearing Cups with lubricator
U-10078-00	U-Joint	COMPACT PLUS 2055	57	152.4	Service Free	STD															
U-10081-00	U-Joint	COMPACT PLUS 2055	57	152.4	Service Free	XD															
U-10084-00	U-Joint	COMPACT PLUS 2055	57	152.4	Lube	STD															
U-10089-00	U-Joint	COMPACT PLUS 2055	57	152.4	Lube	STD															With cover on lubricator
U-10098-00	U-Joint	COMPACT PLUS 2055	57	152.4	Lube	STD															1 Bearing Cup with lubricator
U-10103-00	U-Joint	COMPACT PLUS 2055	57	152.4	Lube	STD															2 Bearing Cups with lubricator
U-10108-00	U-Joint	COMPACT PLUS 2055	57	152.4	Lube	STD															4 Bearing Cups with lubricator
U-10090-00	U-Joint	COMPACT PLUS 2060	59	167.8	Service Free	STD															
U-10091-00	U-Joint	COMPACT PLUS 2060	59	167.8	Service Free	XD															
U-10083-00	U-Joint	COMPACT PLUS 2060	59	167.8	Lube	STD															
U-10092-00	U-Joint	COMPACT PLUS 2060	59	167.8	Lube	STD															With cover on lubricator
U-10099-00	U-Joint	COMPACT PLUS 2060	59	167.8	Lube	STD															1 Bearing Cup with lubricator
U-10104-00	U-Joint	COMPACT PLUS 2060	59	167.8	Lube	STD															2 Bearing Cups with Iubricator
U-10109-00	U-Joint	COMPACT PLUS 2060	59	167.8	Lube	STD															4 Bearing Cups with lubricator
U-10093-00	U-Joint	COMPACT PLUS 2065	65	172	Service Free	STD															
U-10095-00	U-Joint	COMPACT PLUS 2065	65	172	Service Free	XD															
U-10082-00	U-Joint	COMPACT PLUS 2065	65	172	Lube	STD															
U-10094-00	U-Joint	COMPACT PLUS 2065	65	172	Lube	STD															With cover on lubricator
U-10100-00	U-Joint	COMPACT PLUS 2065	65	172	Lube	STD															1 Bearing Cup with lubricator
U-10105-00	U-Joint	COMPACT PLUS 2065	65	172	Lube	STD															2 Bearing Cups with lubricator
U-10110-00	U-Joint	COMPACT PLUS 2065	65	172	Lube	STD															4 Bearing Cups with lubricator
S-10043-00	Slip Joint XS		47.6	135.3	SF	STD	419	180	27°	XS 155	4	13	T-10083-00	99.2 x 4.1							
S-10025-00	·	COMPACT PLUS 2040	47.6	135.3	SF	STD	327	110	27°	XS 180	4	15	T-10084-00	119.4 x 2.7							Slip joint with LT grease
S-10038-00		COMPACT PLUS 2040	47.6	135.3	SF	STD	439	180	44°	XS 155	4	13	T-10083-00	99.2 x 4.1							
S-10026-00	•	COMPACT PLUS 2040	47.6	135.3	SF	STD	332	110	27°	XS 155	4	13	T-10083-00	99.2 x 4.1							
S-10027-00		COMPACT PLUS 2040	47.6	135.3	SF	STD	332	110	27°	XS 180	4	15	T-10083-00	99.2 x 4.1							
S-10044-00	•	COMPACT PLUS 2040	47.6	135.3	SF	XD	327	110	27°	XS 155	4	13	T-10084-00	119.4 x 2.7							
S-10030-00	Slip Joint XS	COMPACT PLUS 2040	47.6	135.3	SF	STD	327	110	27°	XS 180	4	15	T-10084-00	119.4 x 2.7							

 $\neg 12$

Spicer PN (Part Number)	Descr.	Series	Bearing Cup (Ø mm)	Span (mm)	U-Joint (Type)	U-Joint (Grease)	Length [mm]	Slip [mm]	Max Angle	Flange Type	Holes	Holes (Ø mm)	Tube	Tube Dim [mm]	Mtg Holes [mm]	Mtg Dist [mm]	CB Height [mm]	CB width	CB (Ø mm)	Shore	Remark
S-10023-00	Slip Joint SAE	COMPACT PLUS 2040	47.6	135.3	SF	STD	315,5	110	25°	SAE 1700	12	9.7	T-10084-00	119.4 x 2.7							
S-10039-00	Slip Joint XS	COMPACT PLUS 2040	47.6	135.3	SF	STD	439	180	44°	XS 180	4	15	T-10083-00	99.2 x 4.1							
S-10040-00	Slip Joint XS	COMPACT PLUS 2040	47.6	135.3	SF	STD	439	180	44°	XS 180	4	15	T-10083-00	99.2 x 4.1							Slip joint with LT grease
S-10045-00	Slip Joint XS	COMPACT PLUS 2040	47.6	135.3	SF	XD	332	110	27°	XS 155	4	13	T-10083-00	99.2 x 4.1							
S-10041-00	Slip Joint XS	COMPACT PLUS 2040	47.6	135.3	RE	STD	439	180	44°	XS 180	4	15	T-10083-00	99.2 x 4.1							With grease on cover tube
S-10031-00	Slip Joint XS	COMPACT PLUS 2040	47.6	135.3	SF	STD	419	180	27°	XS 180	4	15	T-10083-00	99.2 x 4.1							
S-10046-00	Slip Joint XS	COMPACT PLUS 2040	47.6	135.3	RE	STD	332	110	27°	XS 180	4	15	T-10083-00	99.2 x 4.1							
S-10047-00	Slip Joint XS	COMPACT PLUS 2040	47.6	135.3	RE	STD	327	110	27°	XS 155	4	13	T-10084-00	119.4 x 2.7							
S-10048-00	Slip Joint XS	COMPACT PLUS 2040	47.6	135.3	SF	STD	327	110	27°	XS 180	4	15	T-10084-00	119.4 x 2.7							With greaser with cover on cover tube, slip joint with LT grease
S-10020-00	Slip Joint DIN	COMPACT PLUS 2040	47.6	135.3	SF	STD	347	110	44°	DIN 150	8	12.1	T-10084-00	119.4 x 2.7							
S-10032-00	Slip Joint XS	COMPACT PLUS 2040	47.6	135.3	SF	STD	327	110	27°	XS 155	4	13	T-10084-00	119.4 x 2.7							
S-10028-00	Slip Joint XS	COMPACT PLUS 2045/47	52	147.3	SF	XD	360	110	27°	XS 155	4	13	T-10085-00	118.8 x 3.4							
S-10033-00	Slip Joint XS	COMPACT PLUS 2045/47	52	147.3	SF	STD	347	110	27°	XS 180	4	15	T-10085-00	118.8 x 3.4							
S-10049-00	Slip Joint XS	COMPACT PLUS 2045/47	52	147.3	SF	STD	461	180	44°	XS 180	4	15	T-10086-00	108.2 x 4.1							
S-10034-00	Slip Joint XS	COMPACT PLUS 2045/47	52	147.3	SF	STD	360	110	41°	XS 155	4	13	T-10085-00	118.8 x 3.4							
S-10050-00	Slip Joint XS	COMPACT PLUS 2045/47	52	147.3	SF	STD	453	180	41°	XS 155	4	13	T-10086-00	108.2 x 4.1							
S-10029-00	Slip Joint XS	COMPACT PLUS 2045/47	52	147.3	SF	XD	347	110	27°	XS 180	4	15	T-10085-00	118.8 x 3.4							
S-10042-00	Slip Joint XS	COMPACT PLUS 2045/47	52	147.3	SF	XD	453	180	41°	XS 155	4	13	T-10086-00	108.2 x 4.1							
S-10051-00	Slip Joint XS	COMPACT PLUS 2045/47	52	147.3	RE	STD	347	110	27°	XS 180	4	15	T-10085-00	118.8 x 3.4							
S-10052-00	Slip Joint XS	COMPACT PLUS 2045/47	52	147.3	RE	STD	360	110	41°	XS 155	4	13	T-10085-00	118.8 x 3.4							
S-10021-00	Slip Joint DIN	COMPACT PLUS 2045/47	52	147.3	RE	STD	355	110	27°	DIN 180	8	14.1	T-10085-00	118.8 x 3.4							
S-10053-00	Slip Joint XS	COMPACT PLUS 2045/47	52	147.3	RE	STD	347	110	27°	XS 180	4	15	T-10085-00	118.8 x 3.4							With grease on cover tube
S-10022-00	Slip Joint DIN	COMPACT PLUS 2045/47	52	147.3	SF	STD	355	110	27°	DIN 180	8	14.1	T-10085-00	118.8 x 3.4							
S-10054-00	Slip Joint XS	COMPACT PLUS 2045/47	52	147.3	SF	STD	347	110	27°	XS 180	4	15	T-10090-00	118.2 x 4.1							
S-10055-00	Slip Joint XS	COMPACT PLUS 2045/47	52	147.3	RE	STD	347	110	27°	XS 180	4	15	T-10090-00	118.2 x 4.1							
S-10056-00	Slip Joint XS	COMPACT PLUS 2055	57	152.4	RE	STD	371	110	27°	XS 180	4	15	T-10087-00	118.4 x 5.2							
S-10035-00	Slip Joint XS	COMPACT PLUS 2055	57	152.4	SF	STD	441	180	27°	XS 180	4	15	T-10087-00	118.4 x 5.2							Slip joint with LT grease
S-10057-00	Slip Joint XS	COMPACT PLUS 2055	57	152.4	SF	STD	441	180	27°	XS 180	4	15	T-10087-00	118.4 x 5.2							
S-10036-00	Slip Joint XS	COMPACT PLUS 2055	57	152.4	SF	STD	371	110	27°	XS 180	4	15	T-10087-00	118.4 x 5.2							
S-10037-00	Slip Joint XS	COMPACT PLUS 2060	59	167.8	SF	STD	378	110	30°	XS 180	4	15	T-10088-00	128.4 x 5.2							
S-10058-00	Slip Joint XS	COMPACT PLUS 2060	59	167.8	RE	STD	378	110	30°	XS 180	4	15	T-10088-00	128.4 x 5.2							
S-10059-00	Slip Joint XS	COMPACT PLUS 2060	59	167.8	SF	STD	448	180	30°	XS 180	4	15	T-10088-00	128.4 x 5.2							
S-10060-00	Slip Joint XS	COMPACT PLUS 2065	65	172	SF	STD	406	110	27°	XS 180	4	15	T-10089-00	140.2 x 5.1							
S-10061-00	Slip Joint XS	COMPACT PLUS 2065	65	172	RE	STD	406	110	27°	XS 180	4	15	T-10089-00	140.2 x 5.1							
P-10016-00	Fixed Joint XS	COMPACT PLUS 2040	47.6	135.3	SF	STD	163		27°	XS 155	4	13	T-10084-00	119.4 x 2.7							
P-10017-00	Fixed Joint XS	COMPACT PLUS 2040	47.6	135.3	SF	STD	163		27°	XS 180	4	15	T-10084-00	119.4 x 2.7							
P-10018-00	Fixed Joint XS	COMPACT PLUS 2040	47.6	135.3	SF	STD	163		27°	XS 180	4	15	T-10085-00	118.8 x 3.4							
P-10006-00	Fixed Joint XS	COMPACT PLUS 2040	47.6	135.3	SF	STD	163		27°	XS 155	4	13	T-10085-00	118.8 x 3.4							
P-10027-00	Fixed Joint XS	COMPACT PLUS 2040	47.6	135.3	SF	STD	196		44°	XS 155	4	13	T-10083-00	99.2 x 4.1							
P-10019-00	Fixed Joint XS	COMPACT PLUS 2040	47.6	135.3	SF	STD	176		27°	XS 155	4	13	T-10083-00	99.2 x 4.1							
P-10028-00	Fixed Joint XS	COMPACT PLUS 2040	47.6	135.3	SF	XD	163		27°	XS 155	4	13	T-10084-00	119.4 x 2.7							

¬ 14

Spicer PN (Part Number)	Descr.	Series	Bearing Cup (Ø mm)	Span (mm)	U-Joint (Type)	U-Joint (Grease)	Length [mm]	Slip [mm]	Max Angle	Flange Type	Holes	Holes (Ø mm)	Tube	Tube Dim [mm]	Mtg Holes [mm]	Mtg Dist [mm]	CB Height [mm]	CB width	CB (Ø mm)	Shore	Remark
P-10005-00	Fixed Joint SAE	COMPACT PLUS 2040	47.6	135.3	SF	STD	151,5		27°	SAE 1700	12	9.7	T-10084-00	119.4 x 2.7							
P-10029-00	Fixed Joint XS	COMPACT PLUS 2040	47.6	135.3	RE	STD	196		44°	XS 180	4	15	T-10083-00	99.2 x 4.1							
P-10030-00	Fixed Joint XS	COMPACT PLUS 2040	47.6	135.3	SF	XD	176		27°	XS 155	4	13	T-10083-00	99.2 x 4.1							
P-10007-00	Fixed Joint XS	COMPACT PLUS 2040	47.6	135.3	RE	STD	163		27°	XS 155	4	13	T-10084-00	119.4 x 2.7							
P-10031-00	Fixed Joint XS	COMPACT PLUS 2040	47.6	135.3	RE	STD	196		44°	XS 180	4	15	T-10083-00	99.2 x 4.1							
P-10020-00	Fixed Joint XS	COMPACT PLUS 2040	47.6	135.3	SF	STD	176		27°	XS 180	4	15	T-10083-00	99.2 x 4.1							
P-10008-00	Fixed Joint XS	COMPACT PLUS 2040	47.6	135.3	RE	STD	176		27°	XS 180	4	15	T-10083-00	99.2 x 4.1							
P-10032-00	Fixed Joint XS	COMPACT PLUS 2040	47.6	135.3	SF	XD	163		27°	XS 180	4	15	T-10084-00	119.4 x 2.7							
P-10033-00	Fixed Joint XS	COMPACT PLUS 2040	47.6	135.3	RE	STD	163		27°	XS 155	4	13	T-10084-00	119.4 x 2.7							U-Joint with greaser with covers on u-joint
P-10001-00	Fixed Joint DIN	COMPACT PLUS 2040	47.6	135.3	SF	STD	183		44°	DIN 150	8	12.1	T-10084-00	119.4 x 2.7							
P-10002-00		COMPACT PLUS 2040	47.6	135.3	SF	STD	183		44°	DIN 180	10	16.1	T-10084-00	119.4 x 2.7							
P-10034-00		COMPACT PLUS 2045/47	52	147.3	SF	STD	201		41°	XS 155	4	13	T-10086-00	108.2 x 4.1							
P-10035-00		COMPACT PLUS 2045/47	52	147.3	SF 2=	XD	188		27°	XS 155	4	13	T-10085-00	118.8 x 3.4							
P-10021-00		COMPACT PLUS 2045/47	52	147.3	SF	STD	188		27°	XS 155	4	13	T-10085-00	118.8 x 3.4							
P-10036-00		COMPACT PLUS 2045/47	52	147.3	SF	XD	175		27°	XS 180	4	15	T-10085-00	118.8 x 3.4							
P-10037-00		COMPACT PLUS 2045/47	52	147.3	SF	XD	201		41°	XS 155	4	13	T-10086-00	108.2 x 4.1							
P-10009-00		COMPACT PLUS 2045/47	52	147.3	RE	STD	175		27°	XS 180	4	15	T-10085-00	118.8 x 3.4							
P-10003-00		COMPACT PLUS 2045/47	52	147.3	RE	STD	183		27°	DIN 180	8	14.1	T-10085-00	118.8 x 3.4							
P-10004-00 P-10022-00		COMPACT PLUS 2045/47 COMPACT PLUS 2045/47	52	147.3	SF	STD	183		27°	DIN 180	10	16.1	T-10085-00 T-10085-00	118.8 x 3.4							
P-10022-00 P-10010-00		COMPACT PLUS 2045/47	52 52	147.3 147.3	SF SF	STD STD	175 175		27° 27°	XS 180 XS 180	4	15 15	T-10065-00	118.8 x 3.4 118.2 x 4.1							
S-10100-00		COMPACT PLUS 2055	57	152.4	SF	XD	371	110	27°	XS 180	4	15	T-10090-00	118.4 x 5.2							
P-10023-00		COMPACT PLUS 2055	57	152.4	SF	XD	188		27°	XS 180	4	15	T-10087-00	118.4 x 5.2							
P-10011-00		COMPACT PLUS 2055	57	152.4	RE	STD	188		27°	XS 180	4	15	T-10087-00	118.4 x 5.2							
P-10024-00		COMPACT PLUS 2055	57	152.4	SF	STD	188		27°	XS 180	4	15	T-10087-00	118.4 x 5.2							
S-10101-00		COMPACT PLUS 2060	59	167.8	SF	XD	378	110	30°	XS 180	4	15	T-10088-00	128.4 x 5.2							
P-10025-00	,	COMPACT PLUS 2060	59	167.8	SF	STD	203		30°	XS 180	4	15	T-10088-00	128.4 x 5.2							
P-10026-00		COMPACT PLUS 2060	59	167.8	SF	XD	203		30°	XS 180	4	15	T-10088-00	128.4 x 5.2							
P-10012-00	Fixed Joint XS	COMPACT PLUS 2060	59	167.8	RE	STD	203		30°	XS 180	4	15	T-10088-00	128.4 x 5.2							
S-10102-00	Slip Joint XS	COMPACT PLUS 2065	65	172	SF	XD	406	110	27°	XS 180	4	15	T-10089-00	140.2 x 5.1							
P-10013-00	Fixed Joint XS	COMPACT PLUS 2065	65	172	SF	STD	211		27°	XS 180	4	15	T-10089-00	140.2 x 5.1							
P-10014-00	Fixed Joint XS	COMPACT PLUS 2065	65	172	SF	XD	211		27°	XS 180	4	15	T-10089-00	140.2 x 5.1							
P-10015-00	Fixed Joint XS	COMPACT PLUS 2065	65	172	RE	STD	211		27°	XS 180	4	15	T-10089-00	140.2 x 5.1							
M-10019-00	Midship Assembly XS	COMPACT PLUS 2040					136			XS 155	4	13	T-10084-00	119.4 x 2.7	15 x 15	220	90				Fitted with center bearing B-10022-00
M-10020-00	Midship Assembly XS	COMPACT PLUS 2045/47					136			XS 155	4	13	T-10085-00	118.8 x 3.4	15 x 15	220	90				Fitted with center bearing B-10022-00
M-10021-00	Midship Assembly XS	COMPACT PLUS 2040					136			XS 180	4	15	T-10084-00	119.4 x 2.7	15 x 15	220	90				Fitted with center bearing B-10022-00
M-10022-00	Midship Assembly XS Midship	COMPACT PLUS 2045/47					136			XS 180	4	15	T-10085-00	118.8 x 3.4	15 x 15	220	90				Fitted with center bearing B-10022-00
M-10023-00	Assembly XS	COMPACT PLUS 2055					162			XS 180	4	15	T-10087-00	118.4 x 5.2	15 x 15	220	90				Fitted with center bearing B-10015-00
M-10024-00	Midship Assembly XS	COMPACT PLUS 2060					162			XS 180	4	15	T-10088-00	128.4 x 5.2	15 x 15	220	90				Fitted with center bearing B-10015-00

 $\neg 16$

Spicer PN (Part Number)	Descr.	Series	Bearing Cup (Ø mm)	Span (mm)	U-Joint (Type)	U-Joint (Grease)	Length [mm]	Slip [mm]	Max Angle	Flange Type	Holes	Holes (Ø mm)	Tube	Tube Dim [mm]	Mtg Holes [mm]	Mtg Dist [mm]	CB Height [mm]	CB width	CB (Ø mm)	Shore	Remark
M-10025-00	Midship Assembly XS	COMPACT PLUS 2065					162			XS 180	4	15	T-10089-00	140.2 x 5.1	15 x 15	220	90				Fitted with center bearing B-10015-00
M-10026-00	Midship Assembly XS	COMPACT PLUS 2065					143,5			XS 180	4	15	T-10089-00	140.2 x 5.1	22	203	79.4				Fitted with center bearing 1000008707013
T-10083-00	Tube	COMPACT PLUS 2040												99.2 x 4.1							
T-10084-00	Tube	COMPACT PLUS 2040												119.4 x 2.7							
T-10085-00	Tube	COMPACT PLUS 2045/47												118.8 x 3.4							
T-10086-00	Tube	COMPACT PLUS 2045/47												108.2 x 4.1							
T-10087-00	Tube	COMPACT PLUS 2055												118.4 x 5.2							
T-10088-00	Tube	COMPACT PLUS 2060												128.4 x 5.2							
T-10089-00	Tube	COMPACT PLUS 2065												140.2 x 5.1							
T-10090-00	Tube	COMPACT PLUS 2045/47												118.2 x 4.1							
B-10022-00	CB Assembly	COMPACT PLUS 2040, COMPACT PLUS 2045/47													15 x 15	220	90	22	55	84	
B-10015-00	CB Assembly	COMPACT PLUS 2055, COMPACT PLUS 2060, COMPACT PLUS 2065													15 x 15	220	90	26	70	84	
100000 8707013	CB Assembly														22	203	79.4	48.5	70		
X-10070-00	CB Kit	COMPACT PLUS 2040, COMPACT PLUS 2045/47													15 x 15	220	90	26	75	84	Including glue and needle
X-10071-00	CB Kit	COMPACT PLUS 2055													15 x 15	220	90	26	85	84	Including glue and needle
X-10072-00	CB Kit	COMPACT PLUS 2055, COMPACT PLUS 2060, COMPACT PLUS 2065													15 x 15	220	90	26	70	84	B-10015-00 and bolts
A-10001-00	Sleeve Muff Assembly	COMPACT PLUS 2040					170						T-10084-00	119.4 x 2.7	15 x 15	220	90				Use boot 1000008401011
A-10002-00	Sleeve Muff Assembly	COMPACT PLUS 2045/47					179						T-10085-00	118.8 x 3.4	15 x 15	220	90				Use boot 1000008401011
A-10003-00	Sleeve Muff Assembly	COMPACT PLUS 2055					192						T-10087-00	118.4 x 5.2	15 x 15	220	90				Use boot 1000008401015
X-10067-00	MIS Yoke shaft kit	COMPACT PLUS 2040	47.6	135.3	SF	STD		110	27°				T-10084-00	119.4 x 2.7							Use boot 1000008401011
X-10068-00	MIS Yoke shaft kit	COMPACT PLUS 2045/47	52	147.3	SF	STD		110	27°				T-10085-00	118.8 x 3.4							Use boot 1000008401011
X-10069-00	MIS Yoke shaft kit	COMPACT PLUS 2055	57	152.4	SF	STD		110	27°				T-10087-00	118.4 x 5.2							Use boot 1000008401015

¬ 18





Dana Investment GmbH Reinzstrasse 3-7 89233 Neu-Ulm Germany SpicerParts.com