

# KWL® Ventilation Systems

for your feel-good climate.



Enjoyment comes when  
**everything fits into place.**

---



# Contents

## Why Helios is your partner for ventilation with heat recovery:

- An overview of our ventilation systems
- Everything from a single source
- Our focus on design-oriented air inlets and outlets
- Advantages for end users, tradesmen, specialist planners and housing companies
- Online design with KWLeasyPlan

→ from page 2



### Decentralised domestic ventilation with heat recovery

- Wall installation units KWL EC 60 and KWL EC 45-160


→ from page 14



### Decentralised ventilation with heat recovery

- KWL YOGA with up to 400, 700 or 1000 m³/h

→ from page 60

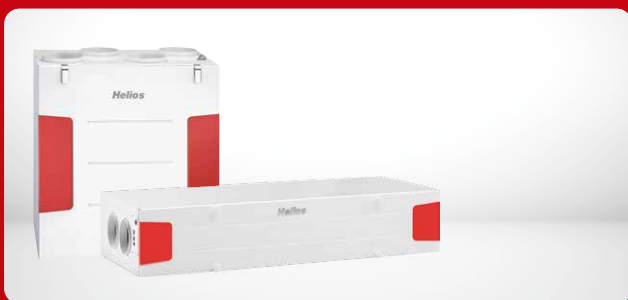

### Central ventilation units

- Wall installation "W": Wall units with up to 170, 200, 300, 360, 470, 500 or 890 m³/h
- Ceiling installation "D": Ceiling units with up to 220, 340, 700, 1400 or 2000 m³/h
- Standing installation "S": Central units with up to 800, 1200, 1800 or 2600 m³/h

→ from page 20




### The peripherals:

- *flexpipeplus* for installation in, on or under the ceiling
- IsoPipe for intake and exhaust ducting
- *renopipe* for installation in existing housing
- Flat duct system for installation on unfinished floors
- Additional accessories for KWL units
- KWL MultiZoneBox for compact supply and extract ventilation
- KWL HygroBox for active humidification
- Ground-to-brine/air heat exchangers

→ from page 70

# For individual rooms and residential units: Decentralised ventilation systems.

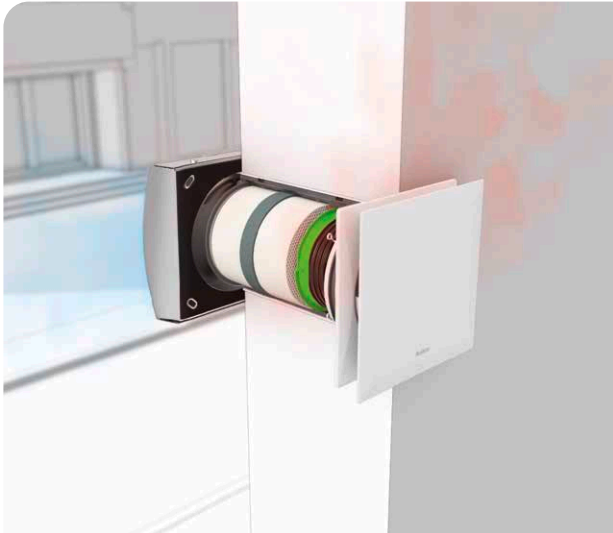

## KWL EcoVent Verso

The KWL EcoVent Verso heat recovery is regenerative via a ceramic heat accumulator. In extract air mode, this absorbs the heat from the indoor air and stores it in the ceramic core in order to transfer it to the inflowing intake air in the following supply air phase.

- A functional unit consists of at least two units, which operate out of phase.
- Particularly space-saving thanks to a diameter of just 160 mm.
- KWL EcoVent Verso achieves the energy efficiency class A+ with additional room sensors.

Page 16



## KWL EcoVent

Helios EcoVent is the compelling solution for a comfortable living environment and energy savings in individual rooms. A heat recovery efficiency of more than 70 % is achieved due to the large-scale aluminium plate heat exchanger.

- Compact wall installation unit for the energy-saving supply and extract ventilation of individual rooms without an air distribution system.
- Convenient, room-by-room control, with automatic humidity element upon request.
- Ideal for bringing existing buildings up to the legally required EnEV standard in the course of a renovation.

Page 18




## KWL Yoga

Whether in schools or public buildings, at work or in leisure time – the new ventilation units with heat recovery KWL Yoga provide the best indoor air quality. This is possible thanks to the decentralised functionality with minimal installation work and space requirements. It is also ideal for subsequently and substantially improving the air quality in individual rooms.

- Flexible: Three available unit sizes for flow rates up to 400, 700 and 1000 m<sup>3</sup>/h.
- Customised: 12 different equipment options.
- Available with standard and enthalpy heat exchanger.

Page 60

# For residential and commercial buildings: Central ventilation solutions.

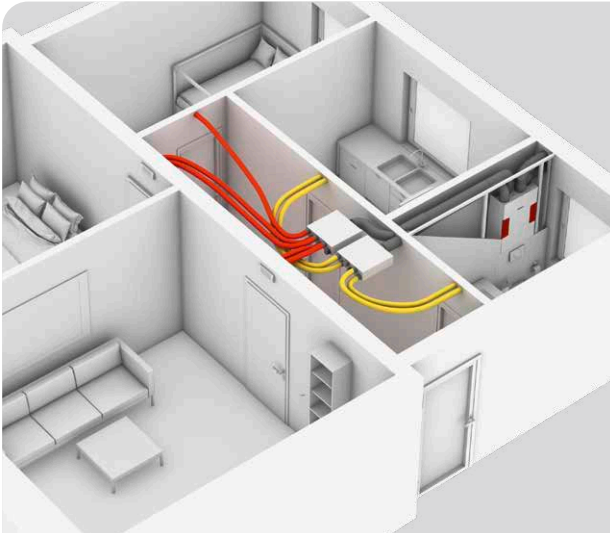


## KWL compact units

Central KWL compact units are available in many sizes with air capacities up to 890 m³/h and they offer a variety of ventilation solutions for apartments and single family houses – individually adapted to the needs of residents.

- Wall and ceiling units in different gradations.
- Intuitive and modern control concept easyControls 3.0.
- Compact dimensions and high installation flexibility.
- Passive house certified units.

Page 26

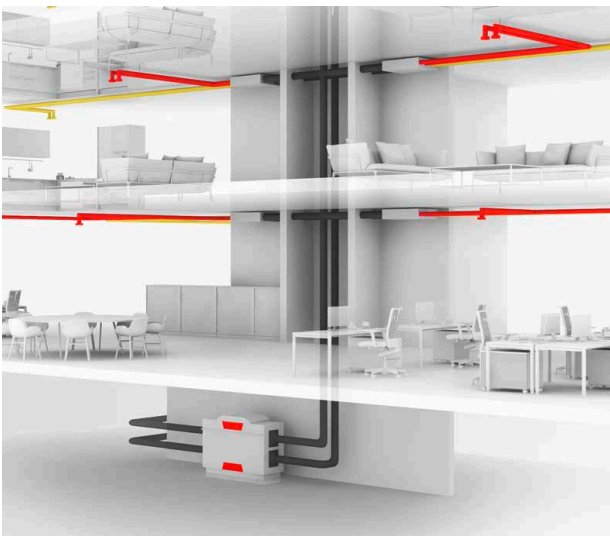

## KWL large units

Reliable solutions for the supply and extract ventilation of all residential units are sought after in residential buildings and apartment buildings. Helios KWL large units are available in many equipment variants - for air capacities up to 2600 m³/h.

- Floor-standing and ceiling units with passive house certification for a variety of requirements.
- Certified according to VDI 6022.
- Various comfort and equipment variants.

Page 46

**Do you already know about our energy-efficient compact ventilation units Helios AIR1?** These large units with heat recovery offer a wide range of solutions with air capacities of up to 15,000 m³/h – for almost any application.

- 4 series, more than 30 types and >100 configuration options.
- Various heating and cooling options.
- Components with German Hygiene- (VDI 6022), Eurovent- and Passive house Certification.




More info at:  
[www.eurovent-certification.com](http://www.eurovent-certification.com)

AIR1 XC series

[www.HeliosAIR1.com](http://www.HeliosAIR1.com)



# Everything from a single source.

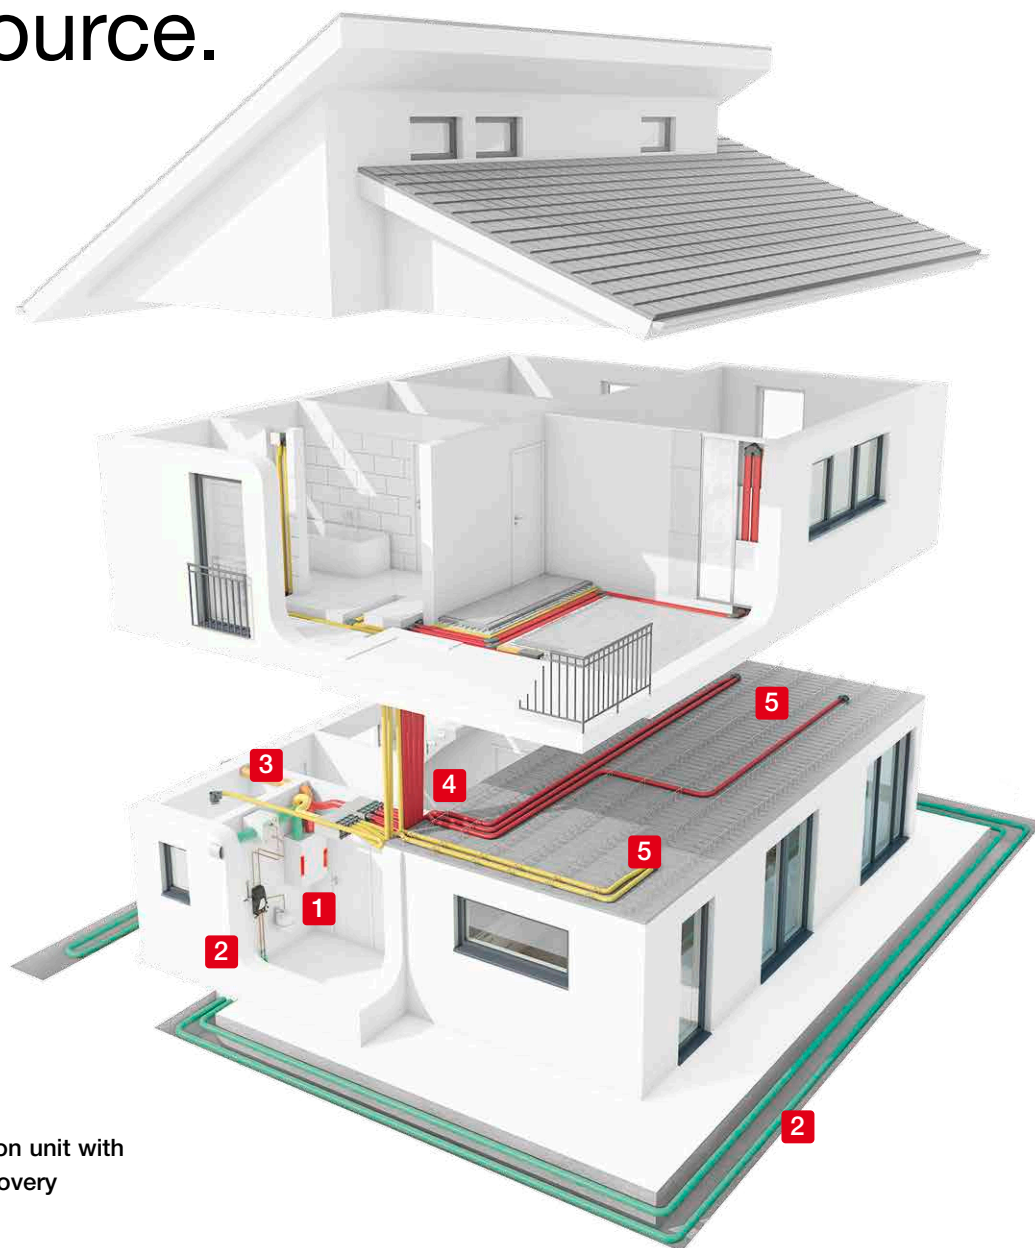

Ventilation unit with heat recovery



Ground-to-brine/air heat exchanger



Insulated ducting system IsoPipe for intake and exhaust ducting





Air distribution system FlexPipe<sup>plus</sup> for extract and supply air



Accessories such as silencers, air inlets and outlets, etc.

## Always the perfect solution with *flexpipe<sup>plus</sup>*.

- Suitable for solid, timber or prefabricated house construction.
- Installation in concrete ceilings, on unfinished flooring, in walls or in suspended ceilings.
- Vertical and horizontal adapters allow any desired combination round/oval, oval/oval, round/round for maximum flexibility.



## Universal, flexible and individual. The *flexpipe<sup>plus</sup>* distribution boxes.



- The sophisticated distribution concept from Helios offers the ideal solution for all installation requirements.
- All connections to the distributors are freely selectable, whether they are on the front, offset by 90° or combined.
- Mixed installation with round and oval connectors is possible depending on the requirements.
- Supply and extract air ducts can also be installed directly in the concrete ceiling.

## Eye-catching with added value: The KWL design wall grilles.



The elegant wall grilles are available in three classic designs (in stainless steel or signal white). They fit perfectly in any room atmosphere and provide for a pleasant and draught-free supply air flow.


We are not only developing innovative ventilation systems – **comfort and aesthetics also play a major role.**




**Harry Haas,**  
Business Unit Manager HRV

### **Design ventilation valves**


Our design ventilation valves are near-invisible and thus always fit perfectly with the respective environment.

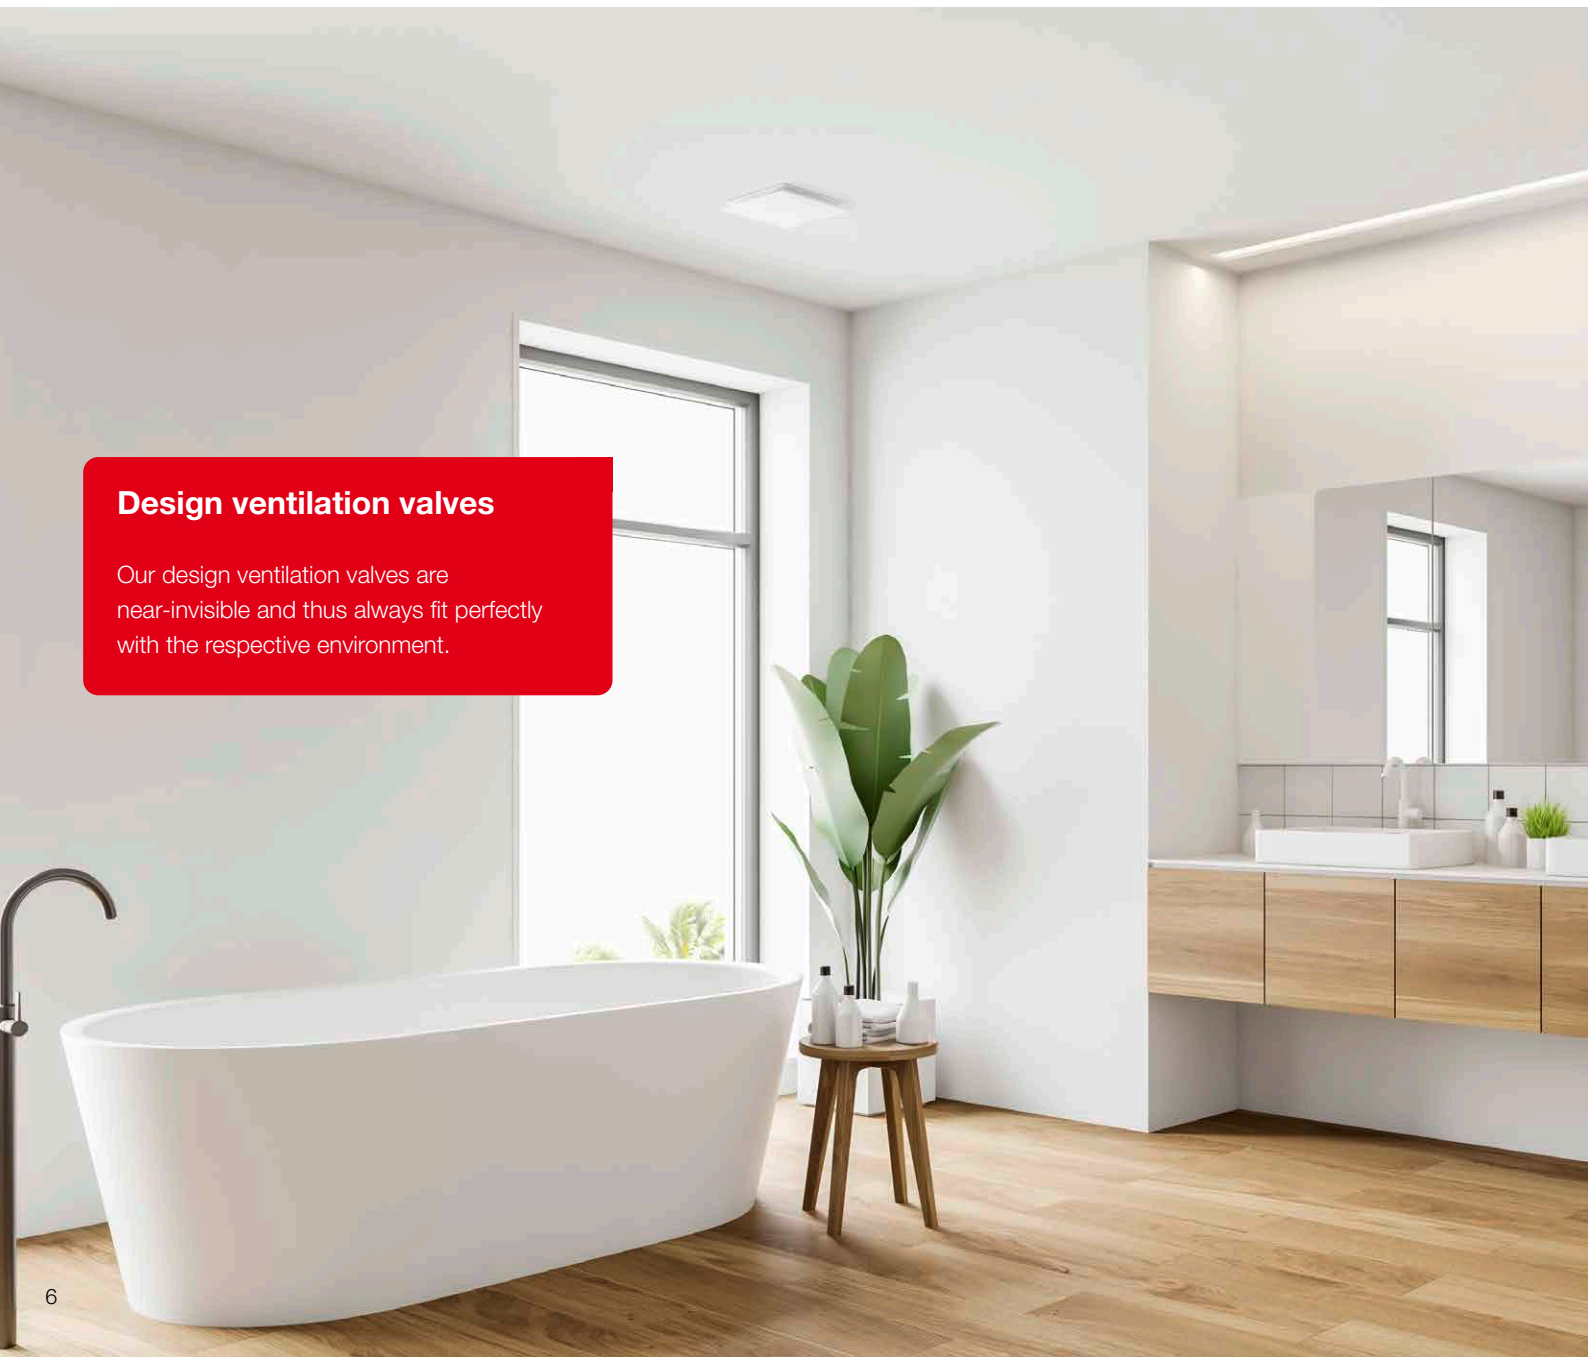

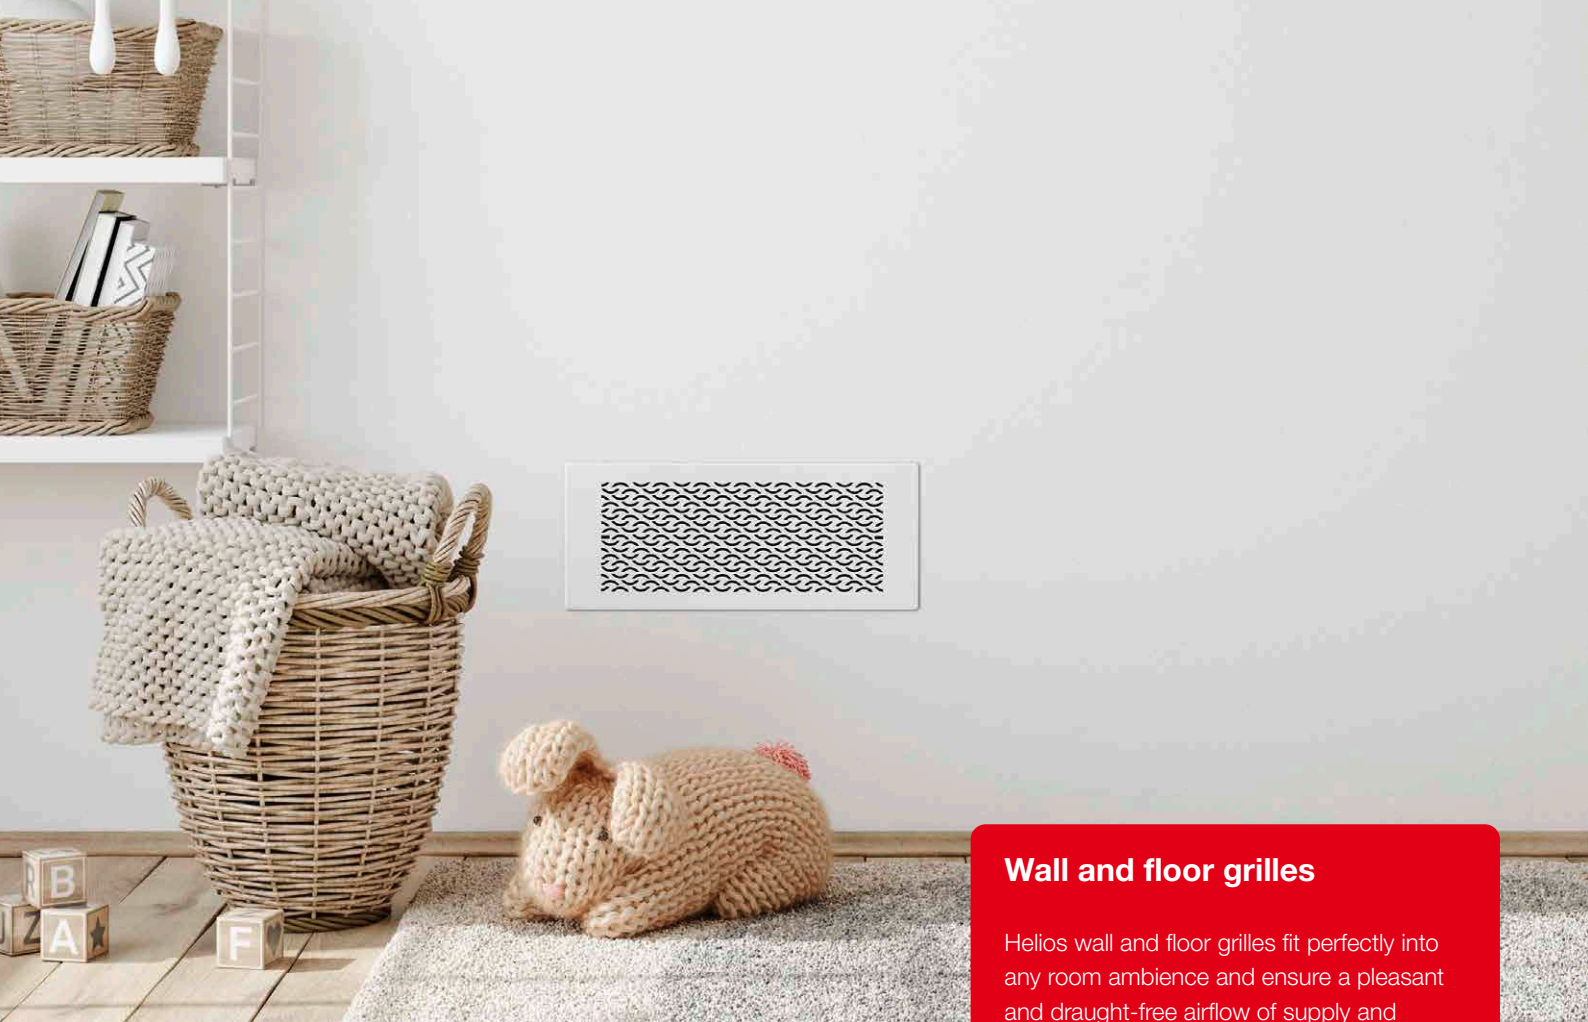

### Wall and floor grilles

Helios wall and floor grilles fit perfectly into any room ambience and ensure a pleasant and draught-free airflow of supply and extract air. The elegant wall grilles are available in three designs, both in stainless steel or signal white.

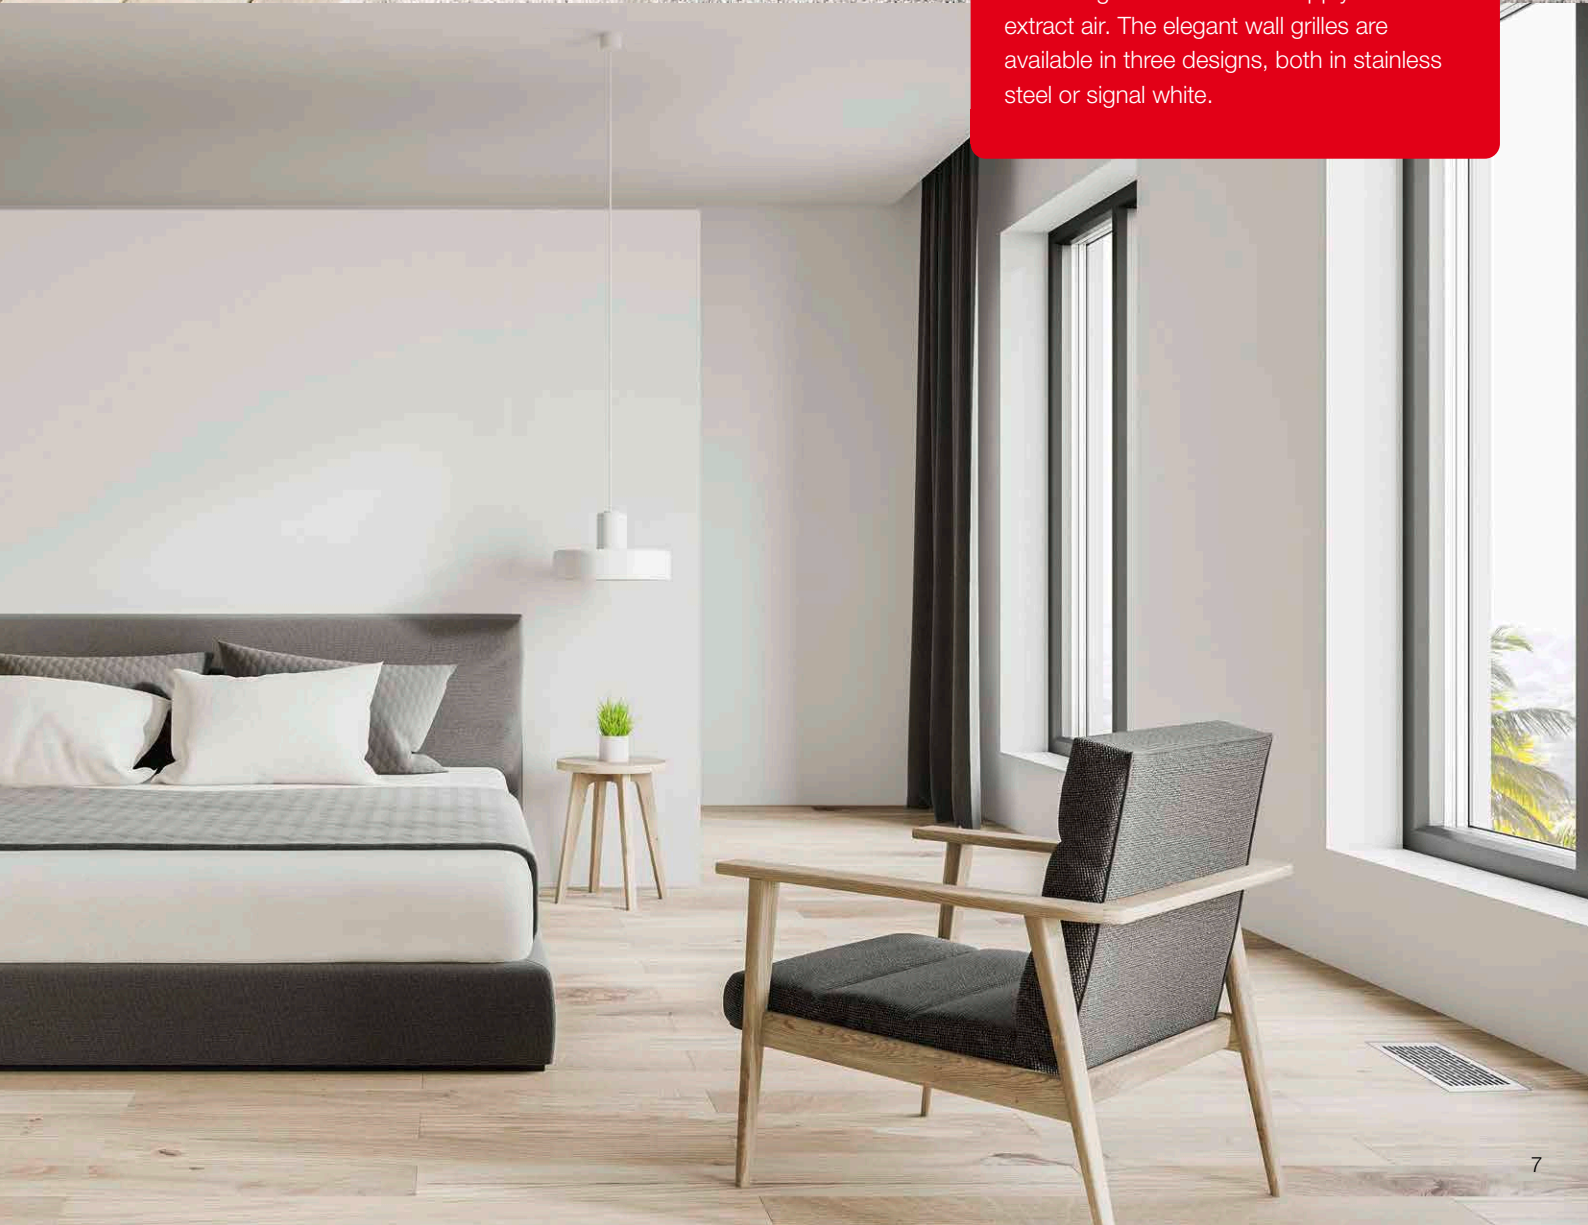

# Added safety. Added value for you.

Whether it is installers, specialist planners, architects or end users – the systems from Helios benefit everyone across the board. Discover your personal advantages now and be inspired by the many highlights of our KWL ventilation systems.

Helios is  
**award-winning:**



## Advantages for end users

- **Take full advantage:**  
You will always have a healthy, sustainable feel-good atmosphere and save on energy costs at the same time.
- **Not just for allergy sufferers:**  
The first-class filters effectively remove pollen and dust from the room air.
- **Fully automatic ventilation system control:**  
With modern sensors, without any user intervention and according to your needs.
- **The right unit for every requirement:**  
Whether it is building quality A++ (passive house), A+ or A – the individual classes can only be reached with a ventilation system with heat recovery.
- **Award-winning design:**  
The multiple award-winning system components can be ideally integrated into any room atmosphere.
- **Flexible, intuitive and smart:**  
Convenient and intuitive controllers facilitate everyday use.



## Advantages for tradesmen

- **Everything from a single source:**  
Our system components are ideally tuned to each other.
- **Decades of experience:**  
We always consider the needs of installers and we only develop systems which are quick and easy to install on site.
- **Simple commissioning:**  
Every system is ready for operation in no time thanks to the various commissioning assistants.



## Advantages for specialist planners, architects and housing companies

- **Best support:**  
You will find us right around the corner from you thanks to our nationwide sales force.
- **It couldn't be simpler:**  
You can plan your individual solution for a variety of applications easily, quickly and in compliance with DIN standards with our online tool KWL easyPlan.
- **Fulfils every customer request:**  
You can meet all requirements thanks to our wide range of products.



# Simple, fast and safe:

## Online design with KWL<sup>®</sup>easyPlan.

Our online software [www.KWLeasyPlan.de](http://www.KWLeasyPlan.de) takes all the hassle out of creating a ventilation concept and the DIN-compliant design of a ventilation system. The obtained results can be transferred to a Material Assistant, which will suggest the suitable Helios system components for your project – simple, uncomplicated and in no time at all. All results can also be provided as a PDF document and in other data formats.

All programme functions are available free of charge, without obligation and without registration.

Registered “easyPlanners” have additional options, such as saving, re-editing or copying projects. A list of materials with list price information is also issued.

### > Smart assistants quickly guide you to your goal

The online software is divided into three steps. The user guidance through each step is always intuitive and dialogue-oriented and maintains an overview at all times:

1.

#### Creation of a ventilation concept

- Check whether a ventilation measure is required for your project with just a few clicks and entering the living area.
- The results can be determined for both single family houses and apartment buildings.

2.








#### Select and design the ventilation measure

- If a ventilation measure is required, you can choose between different solutions for each residential unit.
- Once the rooms per residential unit are entered, KWLeasyPlan automatically creates a DIN-compliant ventilation design. Experienced users can also adjust this design manually.
- The air volumes per residential unit are clearly illustrated in tabular form for each room.
- The required number of air inlets/outlets per room is determined once the desired pipe diameter is selected.
- Finally, the location of the ventilation unit must be selected and the programme will automatically provide a schematic diagram of the ventilation unit including the air volume details.


3.

#### The Material Assistant

- The ventilation design results can be transferred directly to the Material Assistant.
- The Material Assistant suggests suitable Helios products and system components – perfect for inexperienced or occasional users. Of course, professionals can adjust the selection if necessary.
- The generated material list generally includes all required system components for the domestic ventilation system and is perfectly suited for quotation requests or for an initial cost estimate.

	Type	Installation			Decentralised / Central	Typical areas of application					Maximum energy efficiency class*	Moisture recovery	With passive house certificate	
		Wall mounting / wall	Ceiling	Floor		Living room	Single family house	Apartment building – apartment central	Apartment building – building central	Commercial / municipal buildings				
	KWL EC 45-160	■			D	■	■	■			A+			
	KWL EC 60	■			D	■	■	■			A			
  	KWL 170 W	■			C		■	■			A+		■	
	KWL 170 W ET	■			C		■	■			A	■	■	
	KWL 200 W	■			C		■	■			A			
	KWL 200 W ET	■			C		■	■			A	■		
	KWL 250 W	■			C		■	■			A+			
	KWL 250 W ET	■			C		■	■			A	■		
	KWL 300 W	■			C		■	■			A			
	KWL 300 W ET	■			C		■	■			A	■		
	KWL 360 W	■			C		■	■			A+		■	
	KWL 360 W ET	■			C		■	■			A	■	■	
	KWL 470 W	■			C		■	■		■	A+			
	KWL 470 W ET	■			C		■	■		■	A	■		
	KWL 500 W	■			C		■	■		■	A			
	KWL 500 W ET	■			C		■	■		■	A	■		
	KWL 890 W	■			C		■	■	■	■	A+		■	
	KWL 890 W ET	■			C		■	■	■	■	A+	■		
	KWL 220 D		■		C		■	■			A+		■	
	KWL 340 D		■		C		■	■			A+			
	KWL EC 700 D		■		C				■	■			■	
	KWL EC 1400 D		■		C				■	■			■	
	KWL EC 2000 D		■		C				■	■			■	
	KWL EC 800 S			■	C				■	■			■	
	KWL EC 1200 S			■	C				■	■			■	
	KWL EC 1800 S			■	C				■	■			■	
	KWL EC 2600 S			■	C				■	■			■	
	KWL YOGA Style 400		■		D					■				
	KWL YOGA Style 400 ET		■		D					■		■		
	KWL YOGA Style 700		■		D					■				
	KWL YOGA Style 700 ET		■		D					■		■		
	KWL YOGA Style 1000		■		D					■				
	KWL YOGA Style 1000 ET		■		D					■		■		
	KWL® peripherals <b>flexpipe</b> <sup>plus</sup> , KWL® MultiZoneBox, IsoPipe, <b>renopipe</b> , Flat duct, KWL HygroBox, Ground heat exchanger													

\* See KWL® unit product pages for details.

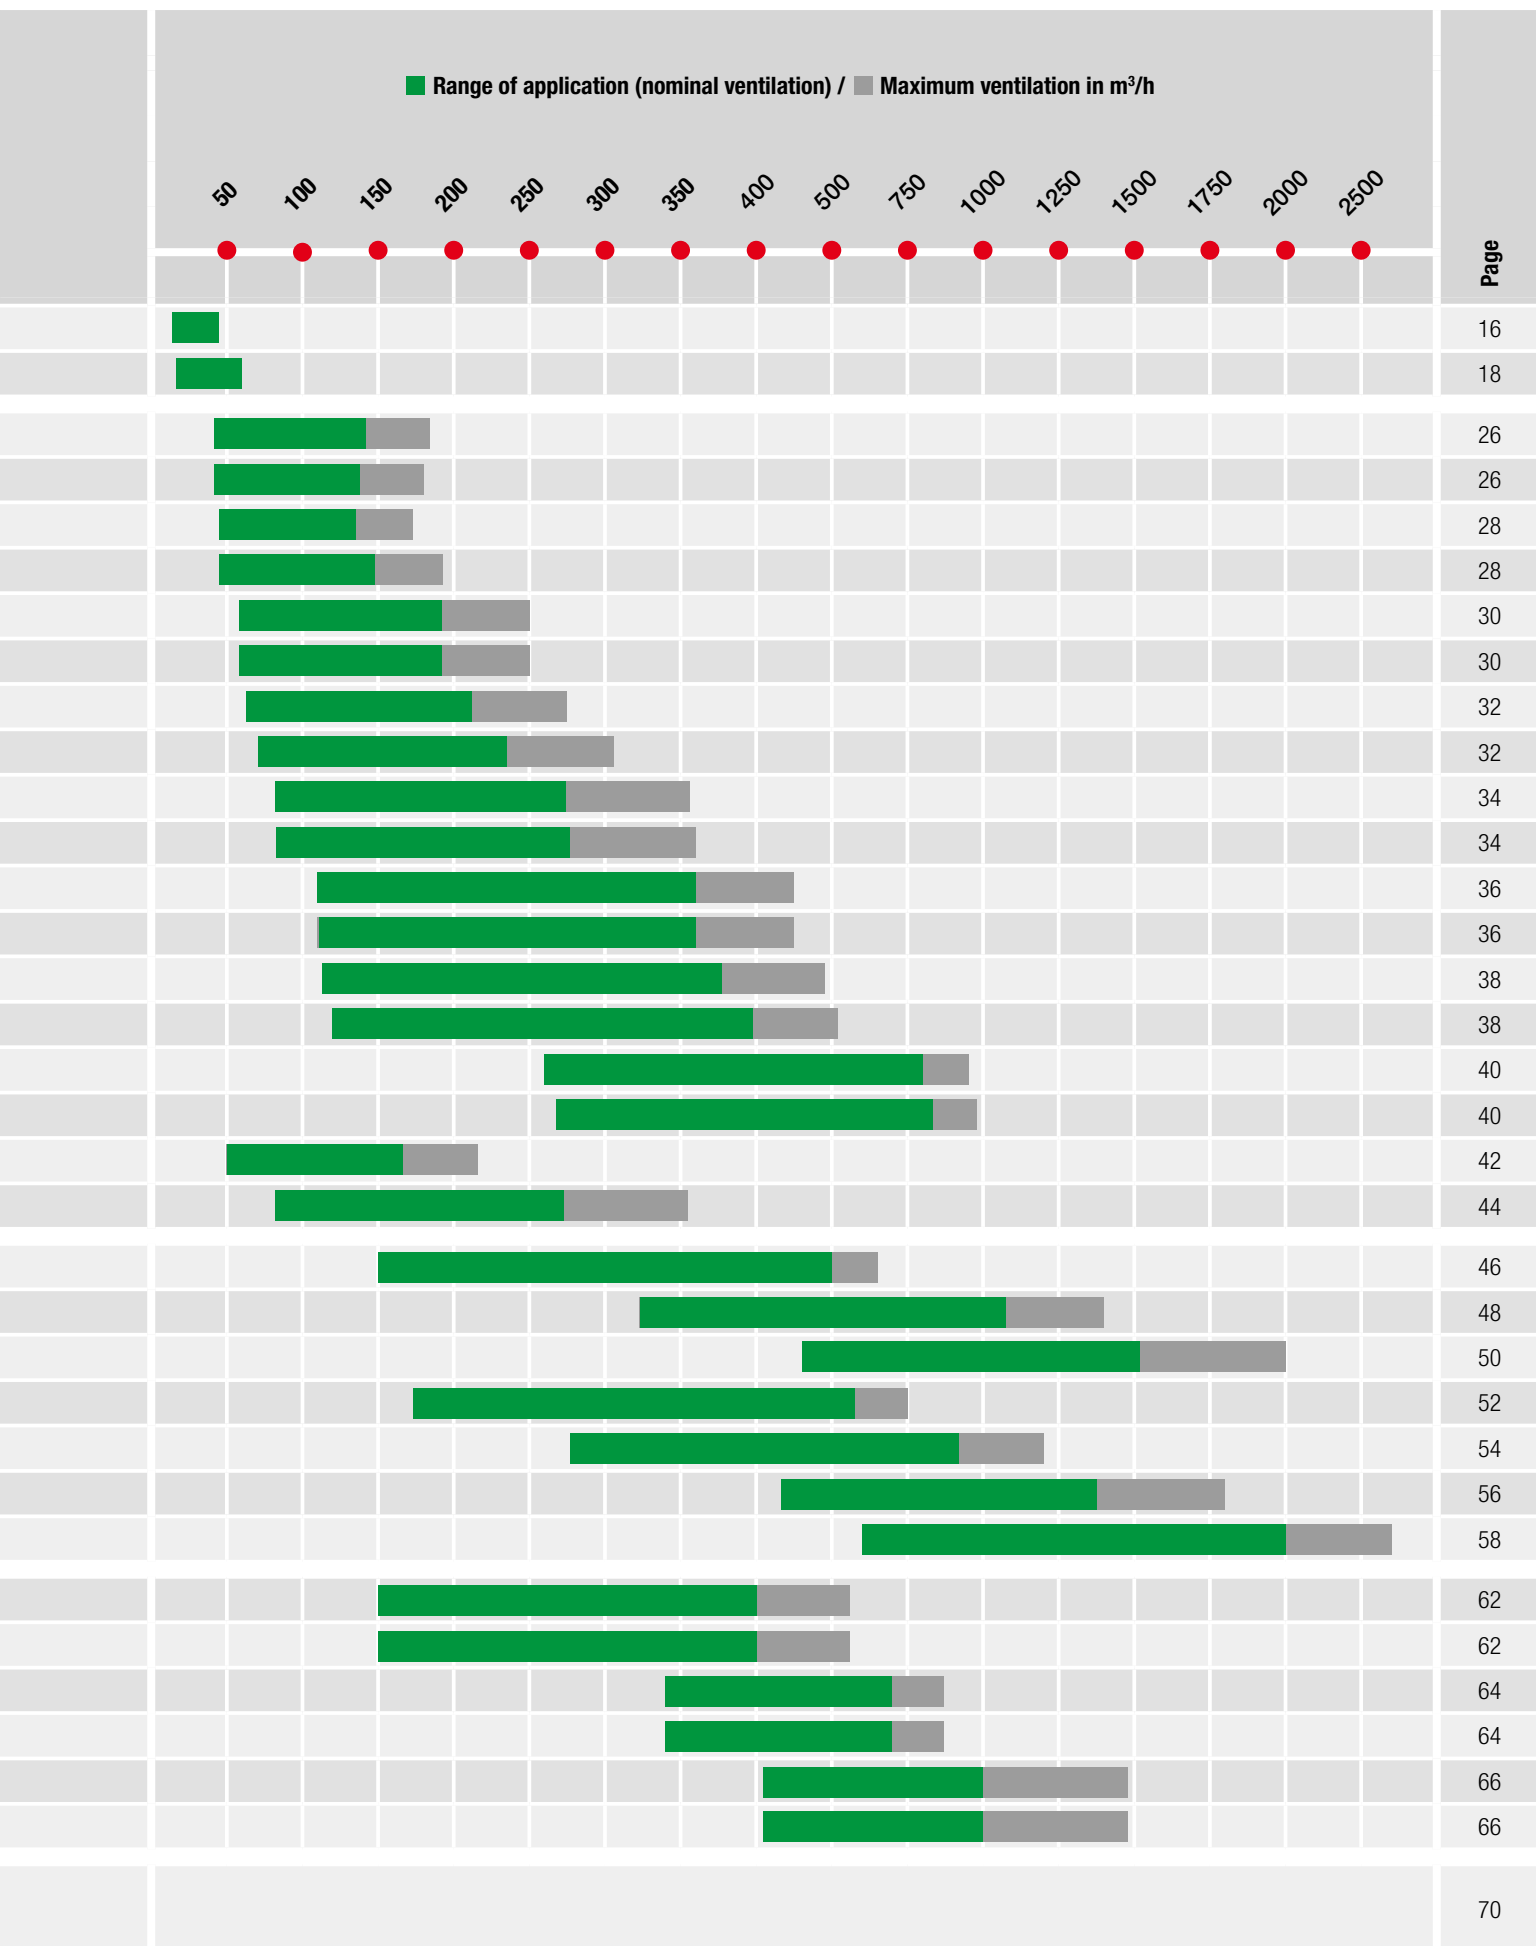

# Decentralised domestic ventilation **with heat recovery.**



Controlled domestic ventilation with heat recovery (KWL) fully ensures ventilation pursuant to DIN 1946-6 and thus guarantees that not only the indoor environment, but also the energy balance sheet benefit from the ventilation technology measures.


In this respect, a decentralised ventilation system with heat recovery offers major advantages, especially in renovation, as it is an economical and simple solution for single rooms.

**The focus is on two main points:**

On the one hand, high efficiency is a prerequisite for the economical operation of the units and, on the other hand, the individual ventilation units must form a complete system in perfect coordination with each other.

**The decentralised ventilation units with heat recovery from Helios are among the best in their class in both categories.**

Thanks to the quick and simple installation, they provide an economical solution for the supply and extract ventilation of single rooms. Residents can sit back, relax and take a deep breath of fresh air!


▶ **PLAY**

Learn about the many possibilities offered by EcoVent Verso KWL EC 45-160 now on our YouTube channel.



#### ■ EcoVent Verso KWL EC 45-160

With a ceramic heat exchanger, flow straightener and EC fan. For flush wall mounting in single rooms, ideal if space is limited.


16<sup>f</sup>

#### ■ EcoVent KWL EC 60

With a large-scale aluminium plate heat exchanger and two EC fans. For flush wall mounting in single rooms - the optimal renovation solution.


18<sup>f</sup>

#### ■ Selection matrix

12<sup>f</sup>


### Dimensions KWL EC 45-160



**A+**

**A**

KWL EC 45-160

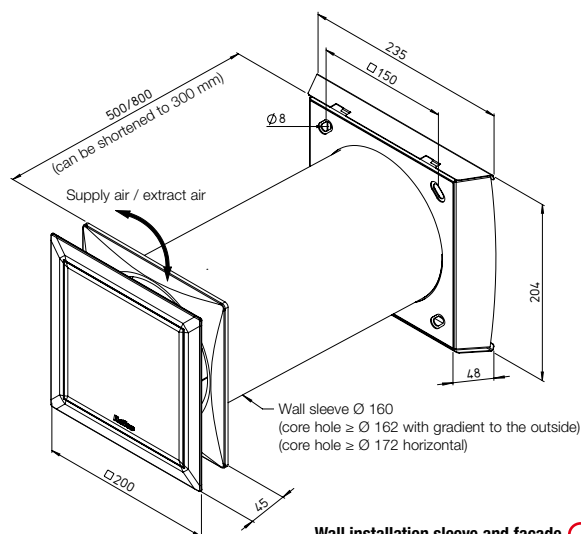

Dimensions in mm

Wall installation sleeve and facade panel essential for unit installation. 

Unit <sup>1)</sup>	KWL EC 45-160 <sup>1)</sup>			Ref. no. 09361	
<b>Flow rate at level</b>	<b>5</b>	<b>4</b>	<b>3</b>	<b>2</b>	<b>1</b>
supply air / extract air $\dot{V}$ m <sup>3</sup> /h	45	37	32	24	14
Sound pressure L <sub>PA</sub> dB(A) at 3 m	34	29	27	21	14
Sound power L <sub>WA</sub>	52	47	45	39	32
Standard sound level diff. D <sub>n,e,w</sub> dB <sup>2)</sup>	Facade panel 44 / Soffit				
Power consumption W	4.5	3.4	2.8	2.1	1.6
Heat recovery efficiency <sup>3)</sup>	up to 88 %				
Operating voltage mains adapter	Input 230 V~, 50/60 Hz / Output 12 V=				
Rated current mA	42	32	27	21	17
El. supply line mains adapter <sup>4)</sup>	NYM-O 2 x 1.5 mm <sup>2</sup>				
El. supply line power supply control <sup>4)</sup>	NYM-O 2 x 1.5 mm <sup>2</sup>				
El. supply line to fan <sup>5)</sup>	J-Y (ST) Y 3 x 0.8 mm				
Protection class III, protection cat.	IP20				
Wiring diagram no.	1091 / 1093				
Temperature operating range	- 12 °C to + 40 °C				
Weight (unit+inner panel) approx. kg	2.8				

5) Use of J-Y (ST) Y 2 x 2 x 0.8 mm is permitted.

## ■ Unit with inner panel

**KWL 45-160** No. 09361

Consists of design inner panel with filter, ceramic heat exchanger, flow straightener, insect screen, EC axial fan with protection grille, removal tool (cord) and EPP half shell base.



## ■ Wall installation sleeve

**Length 500 mm**

**KWL 45-160 WH** No. 09319

**Length 800 mm**

**KWL 45-160 WH-L** No. 09320

Ø 160 mm, plastic, incl. condensate wedge and 2 covers.



## ■ Facade panel

**Made of stainless steel**

**KWL 45-160 FB-E** No. 09321

**With additional coating**

**KWL 45-160 FB-B** No. 09322

For use in environments with severe air pollution or high salt concentration in the air (near the coast).

**With white coating**

**KWL 45-160 FB-W** No. 09323



## ■ Facade panel DEEP

**Made of stainless steel**

**KWL 45-160 FBT-E** No. 09324

For installation in external wall thicknesses from 250 – 300 mm.

**With additional coating**

**KWL 45-160 FBT-B** No. 09326

For use in environments with severe air pollution or high salt concentration in the air (near the coast).

**With white coating**

**KWL 45-160 FBT-W** No. 09340



## ■ Control set UP

**KWL 45 STS-UP** No. 03006

Consists of control element KWL 45 BEU and switching power supply KWL 45 SNU for installation in flush-mounted box. Allows the connection of up to 6 units. In case of more than 6 units, an additional KWL 45 SNU is required. Max. 8 units per control element.



## ■ Reference

A flush-mounted box (depth 61 mm) is required for the control element KWL 45 BEU and for each installed switching power supply KWL 45 SNU.

**Control element (w/o adapter)**

**KWL 45 BEU** No. 03041

## ■ Control set HS

**KWL 45 STS-HS** No. 03007

Consists of control element KWL 45 BEU and switching power supply KWL 45 SNH for top-hat rail (2 pcs). Allows the connection of up to 4 units. In case of more than 4 units, an additional KWL 45 SNH is required. Max. 8 units per control element.

## ■ Switching power supply HS

**KWL 45 SNH** No. 03001

For extending the control set KWL 45 STS-HS from 4 to 8 units. Input 230 V AC, 50/60 Hz. Output 12 V DC / 1.5 A for installation in distribution box (2 pcs). Output voltage according to SELV protection class 3.

## ■ Switching power supply UP

**KWL 45 SNU** No. 03008

For extending the control set KWL 45 STS-UP from 6 to 8 units. Input 230 V AC, 50/60 Hz. Output 12 V DC / 1.9 A for flush-mounted installation in insulated wall. Output voltage according to SELV protection class 3.

## ■ Installation package soffit

**KWL 45-160 LE-RP** No. 08160

With wall sleeve and plaster protective cover. Made of EPP, fire protection class B1.

## ■ Soffit grille

**Made of stainless steel**

**KWL 45 LG** No. 04167

External grille with integrated condensate drain and seal. Dim. mm (H x W) 324 x 74

**With additional coating**

**KWL 45 LG-B** No. 04168

For use in environments with severe air pollution or high salt concentration in the air (near the coast).

**With white coating**

**KWL 45 LG-W** No. 04169



Soffit grille

Insect screen

## ■ Insect screen

**KWL 45 ISL** No. 03004

Made of stainless steel.

For installation package soffit (KWL 45-160 LE-RP).

Suitable for retrofitting.

Dim. mm (H x W) 203 x 48

## ■ Installation kit pitched roof

**Colour: Black**

**KWL 45-160 SD-RP-S** No. 40731

**Colour: Red**

**KWL 45-160 SD-RP-R** No. 40732

Pipe bend element incl. universal roof pan tile and roof hood.



## ■ Pipe bend element

**KWL 45-160 SD-RS** No. 40733

Pipe bend element without universal roof pan tile and roof hood.

## ■ Wall stone

**Length 365 mm**


**KWL 45-160 WS** No. 09302

**Length 490 mm**

**KWL 45-160 WS-L** No. 09306

Installation aid for brickwork.

Made of EPS, fire protection class B1. Replaces the otherwise necessary core hole drilling.



## ■ Casing for surface installation

**KWL-APG\*** No. 04270

## ■ Extension module

**KWL 45 EM** No. 03012

For the combined operation of an extract air system, e.g. according to DIN 18017, pt. 3 with KWL EC 45-160 (combined ventilation). Installation in flush-mounted box.

Dim. mm (WxHxD) 40 x 40 x 29

## ■ Room sensor

**HY 3** No. 01359

**With internal scale**

**HY 3 SI** No. 01360

Electromechanical humidity controller for connection to the external contact of the control element. For surface installation. Function type can be adjusted using Helios software or control element.

Attention: Parallel use with KWL-EM is not possible.

\* Hinweis: Nur für die AP-Montage des KWL 45 BEU in Verbindung mit Hutschienennetzteil KWL 45 SNH.

**KWL EC 60**



**Efficiency class**

**A** KWL EC 60 Pro FF

**B** KWL EC 60 Eco / Pro



Compact wall installation unit with heat recovery for the supply and extract ventilation of individual rooms. KWL EC 60 is a convincing solution for a comfortable indoor climate and energy savings in individual rooms. Ideal for bringing existing building structures up to the legally required EnEV standard during renovation. KWL EC 60 ventilates small and large individual rooms. The installation of multiple units is recommended for a medium-sized residential unit.

**Ideal for renovation due to simple installation**

KWL EC 60 is the optimal renovation solution, even for retrofitted installations. The intake air connection is simply through a core hole in the external wall, in which the wall sleeve is inserted. This simply takes place during the facade renovation. The openings are closed by two building protection covers. The elegant stainless steel outer facade is installed upon completion of plastering. The desired unit is inserted into the wall sleeve and electrically connected in the course of the interior work. Only the elegant facade can be seen on the room side, the front of which is completely closed. Thus, the KWL EC 60 blends discreetly into any room environment and bothersome dirt deposits on ventilation grilles are a thing of the past.

**Aluminium plate heat exchanger with a heat recovery efficiency of over 70 %**

The KWL EC 60 saves expensive heating energy due to the efficient and large-dimensioned aluminium plate heat exchanger with a heat recovery efficiency of over 70 %.

**ECgreenVent by Helios**

Particularly energy-saving ventilation units with EC technology, such as Helios KWL EC 60, are marked with the ECgreenVent label. KWL EC 60 allows the demand-dependent supply and extract ventilation of individual rooms with heat recovery; multiple units can be independently controlled. Adjustment is not necessary.

**Functionality of the KWL EC 60 ventilation with heat recovery**

Two highly efficient direct current EC fans ensure a uniform air exchange. Contaminants, odours and the stale room air is moved outside, and fresh, preheated air is supplied to the room. The heat is transferred from the stale extract air to the fresh supply air in the large aluminium plate heat exchanger, whereby both airflows remain separate.

**Delivery / scope of order**

Designed for the installation steps, the following elements can be ordered separately:

☐ **Installation kit**

**KWL 60 RS** No. 00708

**KWL 60 RS-B** No. 01961

Consists of wall sleeve (349 mm long), two building protection covers, outer facade and deflector plate made of stainless steel (type RS-B with additional coating\*).

☐ **Unit optionally available in Eco or Pro version.**

\* The external components, such as facade panel, spacer frames and protection grille, are made of high-quality stainless steel. Alternatively available in coated version (types -B) for use in environments with severe air pollution or high salt concentration in the air (near the coast).

**Installation example KWL EC 60**



**Common features Eco and Pro**

**Heat exchanger**

☐ Large aluminium plate heat exchanger with a heat recovery efficiency of over 70 %.

**Air delivery**

Two highly efficient direct current EC fans ensure a uniform air exchange.

**Condensate drain**

Condensate is drained outside directly via the deflector plate on the external cover.

**Air filters**

☐ Two efficient air filters (class ISO coarse 60 % (G4)) in the supply air and extract airflow guarantee the best air purity. An ISO ePM<sub>2.5</sub> 65 % (F7) pollen filter on the supply air side is optional.

**ECO**

**KWL EC 60 Eco**  
The economical solution with a favourable price / performance ratio for all applications.

**Unit Eco**

**KWL EC 60 Eco** No. 09950

Consists of inner facade made of high-quality plastic with an integrated, three-step control element.

**Power control**

Three-step operation via the control element integrated in the inner facade (can be placed at the top or bottom by rotating the facade 180°).  
0 position via on-site off-switch.

**Electrical connection**

Via screwless terminals.


**Technical Data**

Unit <sup>1)</sup>	KWL EC 60 Eco <sup>1)</sup>		Ref. no. 09950
<b>Flow rate at level <sup>2)</sup></b>	<b>③</b>	<b>②</b>	<b>①</b>
supply air/extract air $\dot{V}$ m <sup>3</sup> /h	60	30	17
<b>Noise dB(A)</b>			
radiation L <sub>pA</sub> at 3 m	30	22	18
Power consumption Fans 2xW	4		1
Standard sound level diff. D <sub>n,e,w</sub> dB		39 – 41	
Voltage/Frequency		230 V~, 50 Hz	
Rated current A		0.05	
Protection category IP		X4	
Electrical supply line		NYM-J 3 x 1.5 mm <sup>2</sup>	
Wiring diagram no.		949	
Temperature operating range		– 20 °C to + 40 °C	
Weight approx. kg		6.5	

<sup>1)</sup> The required installation kit (types KWL 60 RS) must be ordered separately (see above for details).

<sup>2)</sup> Volume reduction of approx. 10 % when using pollen filters.

## Dimensions EcoVent KWL EC 60

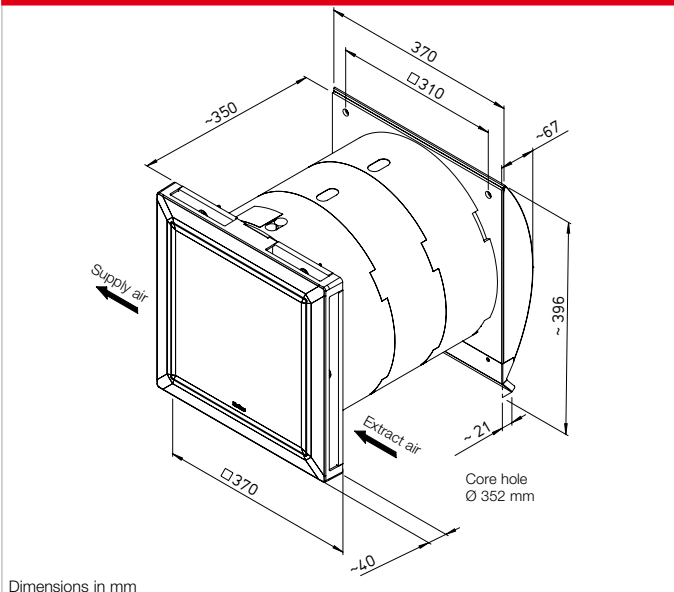

## PRO

**KWL EC 60 Pro / Pro FF**  
Meets even the highest comfort requirements with many useful functions.

### Unit Pro

**KWL EC 60 Pro** No. 09951  
Consists of inner facade made of high-quality plastic and comfort control element (KWL-BCU, 1 pc. included in delivery). See right for details.

### Unit Pro FF

**KWL EC 60 Pro FF** No. 09957  
Like KWL EC 60 Pro, but with additional integrated humidity sensor for demand-dependent ventilation. The humidity values can be adjusted.

### Power control

The comfort control element with graphic display and user-friendly menu navigation, which is included in the delivery, enables the following functions:

- ☐ Four-step manual operation or with digital weekly timer.

- ☐ Control via intelligent CO<sub>2</sub> sensors (accessories, connection of up to 4 pcs. possible.)
- ☐ Supply air/extract air operation individually switchable.
- ☐ Party mode, intensive ventilation.
- ☐ Indication of necessary filter replacement, operating status, operating hours, error messages.
- ☐ Multiple units can be controlled via one control element.
- ☐ Multiple control elements can be connected to one unit.

### Shutters

In case of absence (holiday) or standstill periods, two airtight shutters will close outwards or one airtight shutter will close in case of supply air or extract air operation.

### Electrical connection

Via plug-in coupling (included in delivery.)

## Technical data

Unit <sup>1)</sup>	KWL EC 60 Pro <sup>1)</sup> KWL EC 60 Pro FF <sup>1)</sup>				Ref. no. 09951 Ref. no. 09957
– incl. humidity sensor					
<b>Flow rate at level<sup>2)</sup></b>	<b>4</b>	<b>3</b>	<b>2</b>	<b>1</b>	
Supply/extract air V m <sup>3</sup> /h	60	45	30	17	
<b>Noise dB(A)</b>					
Radiation L <sub>PA</sub> at 3 m	30	29	22	18	
Power consumption Fans 2xW	4	3	2	1	
Standard sound level diff. D <sub>n,e,w</sub> dB	39 – 41				
Voltage/Frequency	230 V~, 50 Hz				
Rated current A	0.06				
Protection category IP	X4				
Electrical supply line	NYM-J 3 x 1.5 mm <sup>2</sup>				
Wiring diagram no.	950				
Temperature operating range	– 20 °C to + 40 °C				
Weight approx. kg	6.5				

<sup>1)</sup> The required installation kit (types KWL 60 RS) must be ordered separately (see above for details).

<sup>2)</sup> Volume reduction of approx. 10 % when using pollen filters.

## Delivery / scope of order

Designed for the installation steps, the following elements can be ordered separately:

### Installation kit

**KWL 60 RS** No. 00708  
**KWL 60 RS-B** No. 01961

As described on the left.

### Unit optionally available in Eco or Pro version.

## Common accessories

### Wall sleeve extension

**KWL 60 WV** No. 00884  
For wall thicknesses from 349 to 571 mm. Can be optionally shortened or connected, 111 mm long, with separator.

### Sound insulation set

**KWL 60 SDS** No. 03059  
Consists of sound insulation frame and matting, white, 100 mm deep. Noise reduction up to 6 dB.

## Spacer frame

**KWL 60 DR** No. 00888  
**KWL 60 DR-B** No. 01962  
External stainless steel frame, 100 mm deep, with separator. For wall thicknesses from 249 to 349 mm.

## Protection grille

**KWL 60 SG** No. 09978  
**KWL 60 SG-B** No. 09976  
Made of stainless steel (2 pcs.), for side attachment to outer facade.

**i** Installation kit essential for unit installation.

**Replacement air filter**  
– 2 pcs. ISO coarse 60 % filter  
ELF-KWL 60/4/4 No. 09445  
– 2 pcs. ISO ePM<sub>2.5</sub> 65 % filter  
ELF-KWL 60/7/7 No. 09446



## PRO

### Accessories for KWL EC 60 Pro Control element (additional)

**KWL-BCU (Flush-mounted)** 09955  
Dim. mm (WxHxD) 80x80x37  
Display and function as described on the left. 1 KWL-BCU included in delivery. Connection of up to 4 pcs. possible. Delivery incl. 3 m connection cable.

**KWL-BCA (Surface-mounted)** 09956

Dim. mm (WxHxD) 83x83x51

### Casing for surface installation

**KWL-APG** No. 04270  
Dim. mm (WxHxD) 83x83x41

## Connection cable

**KWL-SL 6/5** (5 m) No. 09980  
**KWL-SL 6/10** (10 m) No. 09444  
**KWL-SL 6/20** (20 m) No. 09959

For distances > 3 m, with 2 RJ 12 plugs. For connection between control element and KWL EC 60 Pro or between multiple units.

## Connection cable branch

**KWL-ALA** No. 09960

For the connection of additional units or control elements and accessory components (1 pc. always required) which are not included in the delivery.



# Central domestic ventilation with heat recovery.



**A central KWL system with heat recovery from Helios fully ensures continuous ventilation for humidity protection pursuant to DIN 1946-6, regardless of user behaviour.**

The required minimum air exchange is also automatically ensured around the clock.

#### **How it works:**

The KWL system heat exchanger continuously absorbs the heat from the stale room air and transfers it to the fresh intake air, which creates a healthy comfortable atmosphere in all rooms as preheated and filtered supply air. The heat recovery and particularly energy-saving EC fan technology reduces heating costs by up to a third.



#### **Helios KWL added value.**

The universal, perfectly matched Helios KWL system solutions guarantee simple planning, secure installation and maximum efficiency.


## Enthalpy heat exchanger – ideal room air humidity, optimal climate.

KWL units with combined heat and humidity recovery by enthalpy exchanger provide for a comfortable, healthy room climate.

The relative room humidity in living areas should lie between 35–60 %. If the humidity is too low, mucous membranes will dry out, and

electrostatic charges and dust levels in the air will build up. If the used air with a high absolute moisture content is replaced by fresh but dry air

with a smaller absolute moisture content, the humidity in the room will decrease noticeably.

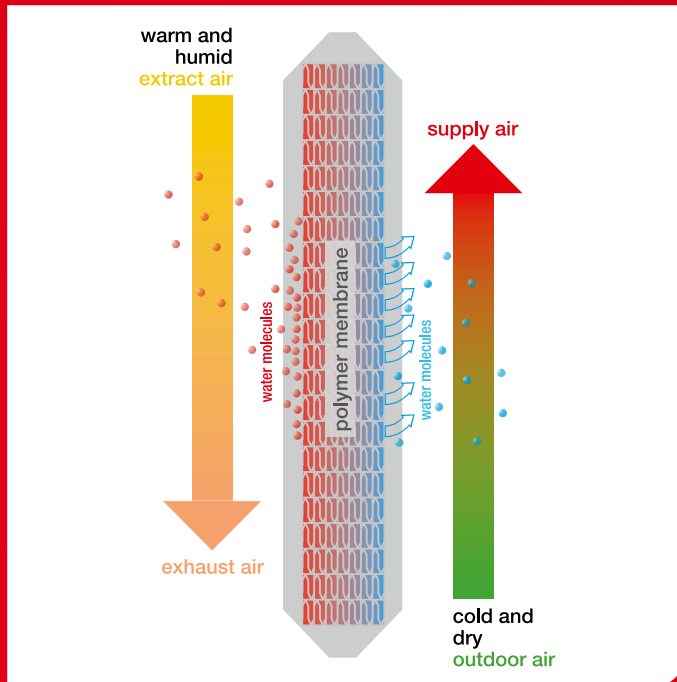

### Ventilation units with enthalpy heat exchangers offer convincing advantages:

- Twofold benefit through energy-saving heat recovery and hygienic humidity recovery in the cold season.
- Humidity recovery from the extract air up to 70 %, depending on the indoor air humidity.

### How the enthalpy heat exchanger works:

The membrane of the heat exchanger ensures the heat transfer from the extract air to the supply air. In addition, it offers the advantage that it is permeable to

moisture. Important here: Air pollutants such as bacteria, viruses, mould spores or other contaminants (e.g. odours) cannot pass through the membrane.

The moisture contained in the warm extract air collects as water vapour on the membrane of the heat exchanger. Due to the special properties of this polymer membrane, the water vapour can now pass over to the supply air side. There it is absorbed by the air flow and returned into the building. This ensures that permanently preheated and clean supply air flows efficiently and without contamination into the living spaces.

### ■ Wall installation “W”

#### Series “W”

Compact wall units up to 500 m³/h.

All models equipped with easyControls as standard and optional enthalpy exchanger.



26<sup>ff</sup>

### ■ Ceiling installation “D”

#### Series “D”

Ultra-flat units up to 2000 m³/h for space-saving ceiling installation.

With ultra-efficient heat exchanger, EC technology and passive house certificate: KWL EC 220 D and 340 D with easyControls as standard.



42<sup>ff</sup>

### ■ Standing installation “S”

#### Series “S”

With air outputs up to 2600 m³/h, for floor-standing installation.

Ideal as central systems in residential, commercial and industrial applications. With ultra-efficient heat exchanger, EC technology and passive house certificate.



52<sup>ff</sup>

### ■ Selection matrix

12<sup>f</sup>

### ■ Peripherals

70<sup>ff</sup>

# Smart, intuitive and individual.

## Helios KWL<sup>®</sup> with **easyControls 3.0**



 **OnAIR**  
Find out more  
on YouTube!

### Your needs – our solution:

With Helios easyControls 3.0, you can not only expect a new control generation, but also a new range with optimal flow rate capacity for unlimited applications and maximum energy efficiency.

The **new, intuitive control concept easyControls 3.0** can be easily adapted to the individual needs of residents and it can be manually controlled via the control element, internal web server or from any location via the Cloud as required. It's that simple!

### Highlights:

- Smart touch control element in black and white, compatible with almost every switch range.
- Customised ventilation: adjustable weekly programme or fully automatically via room air quality sensors.
- Unit access via PC or Smartphone – also on the move via the new easyControls 3.0 Cloud.

This sets a new standard for a smart, modern control system. Or simply put: Helios easyControls 3.0.

## Modern and intuitive: The touch control element



The ventilation unit can be adapted to individual paces of life by creating a weekly programme and by selecting from four different ventilation profiles.




The dark mode always ensures the best readability – even at night thanks to its illuminated screen.



The control element can be integrated in common switch ranges and fits perfectly in any living environment.



The status of the selected ventilation profile, temperature and sensor values as well as filter replacement notifications can be viewed at any time.

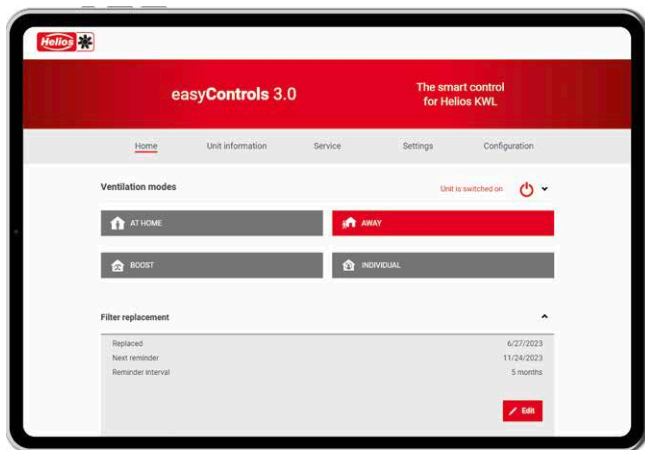

### Smart ventilation, simple control system

- Location-independent control of the KWL system via the integrated web server or with the easy-Controls Cloud, as required.
- Individual access rights through selectable profiles.
- Assistant-supported, fast commissioning.
- Practical and cost-effective remote maintenance when servicing.
- Smart integration in the existing building control system (KNX).


### Customised ventilation for individual comfort

- The establishment of a personal weekly programme is possible.
- Individual configuration of up to four ventilation programmes.
- Compact overview of current status.

## Functional principle

# The control system with unlimited possibilities: Helios easyControls 3.0.

**Controllable anywhere  
and at any time, whether  
at home or on the move.**

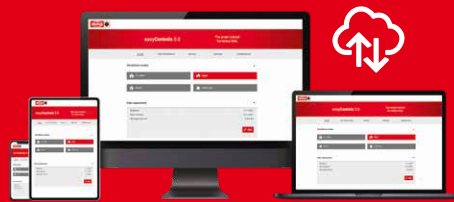

## Building control system

- ModBus interface (integrated)
- KNX-EIB module (optional)

## Demand-controlled ventilation with sensors

- FTF rel. humidity (1x integrated)
- CO<sub>2</sub>
- VOC mixed gas

## Manual control elements

- Modern touch control element
- Discreet 3-level slide switch



## Maximum flexibility in selecting the control elements

If no PC networks are available, or if manual access is preferred, easyControls can be controlled via a modern touch control element or a discreet slide switch.


- Touch control element in white or black
- 3-level switch in white





### Fully automated ventilation with comfort room sensors in 3 versions

- Relative humidity sensor
- VOC sensor
- CO<sub>2</sub> sensor

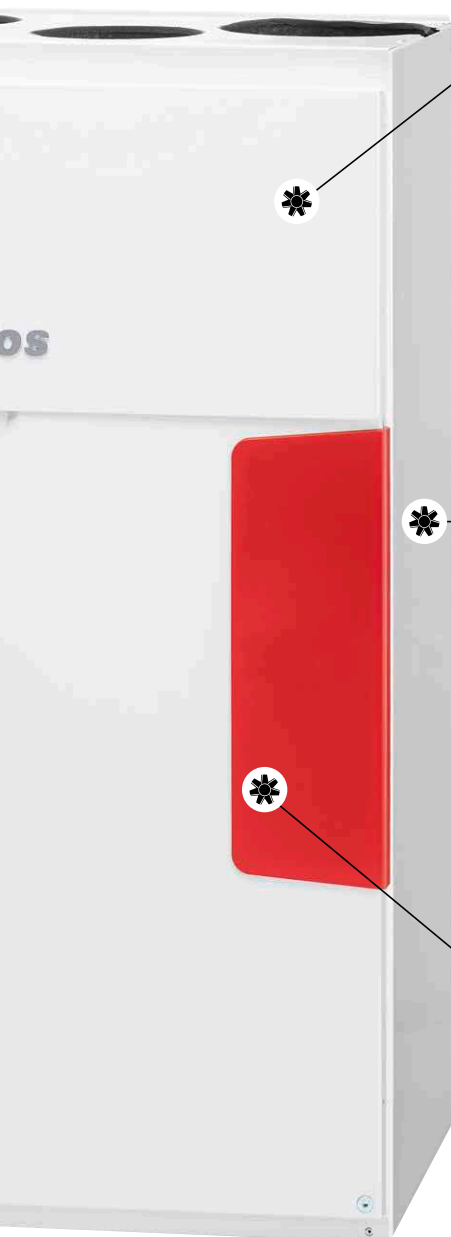

### Easy integration in the building control system

The KWL units can be easily integrated in a building control system network via the standard Modbus interface (RTU) or an optional KNX module.

### Extension module for further comfort options

To control post-heating (either hot water or electric heating register) for additional supply air heating, e.g. in a passive house.




## KWL 170 W



### Efficiency class

- A+** KWL 170 W with additional room sensor
- A** KWL 170 W



 **Compact unit with heat recovery for the central supply and extract ventilation of residential units up to 110 m<sup>2</sup>. Perfectly prepared for modern communication and operation with the new Helios easyControls 3.0 control system incl. integrated network connection.**

Equipped with EC fans for low energy consumption and highly efficient plastic or enthalpy heat exchangers for additional moisture recovery.

- **Casing**  
**Universal casing concept:** Intake air left/right, supply air top or bottom, suitable for plasterboard installation.  
Outside made of galvanised steel sheet in white, internal components made of highly thermal insulating EPP. The intake air connection can be installed on the left or right. Maintenance-friendly access to all unit components through removeable front panels. Delivery state: Intake air on the right.
- Suitable inspection solution for drywall construction upon request.

- **Heat exchanger**
- Large cross counterflow heat exchanger made of plastic, heat recovery efficiency up to 90 %.
- Type "ET" is equipped with highly efficient enthalpy heat exchanger for additional moisture recovery.

- **Fans**  
Two low-noise high-performance centrifugal fans with energy-saving EC motors ensure the air supply and extraction.

- **Ducts**  
Installation-friendly connection of intake, exhaust, extract and supply air through ducts with NW 125 mm using duct connectors (RVBD 125 K, accessories).

- **Condensate connection**  
Condensate drain at the bottom; ball siphon included in delivery. On-site connection to drain pipe.


- **Air filter**  
Clean outdoor air supply via ISO Coarse 65 % (G4) filter and 2nd filter stage via optional ISO ePM, 50 % (F7) or activated carbon filter. Extract air side equipped with an ISO Coarse 65 % (G4) filter in front of the heat exchanger. Easy filter maintenance without opening the unit.

- **Summer operation**  
Equipped with automatic bypass function and heat exchanger cover as standard.

- **Heat exchanger anti-icing protection**  
The standard frost monitoring system automatically controls the supply air flow volume and the optionally installed electrical preheater (KWL-EVH 170 W, accessories).

- **Control system**  
EasyControls 3.0 is the new, modern control system for all KWL compact units from Helios. The standard LAN interface allows the simple integration of the KWL unit in a network and the integration in Helios Cloud. The unit is optionally controlled via an external control element, on PC/laptop, tablet and Smartphone via the integrated web browser or on the move via the Cloud. See page 22 for functionality. Helios easyControls

## Dimensions KWL 170 W

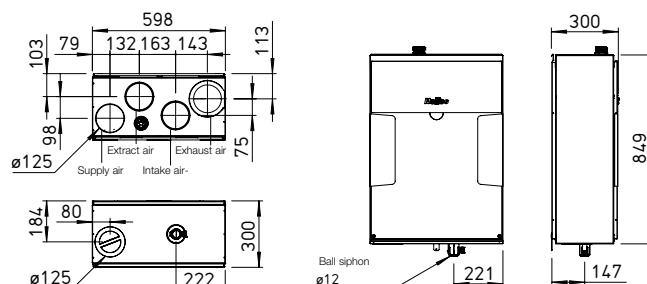


Dimensions in mm

- 3.0 is prepared for:
  - The control elements KWL-BE ECO and KWL-BE Touch (optional accessories).
  - The humidity sensor integrated as standard and other optionally available external air quality sensors (KWL-CO<sub>2</sub> eC, -FTF eC, -VOC eC, accessories) enable automatic, demand-controlled ventilation.
  - Connection to building control system via integrated Modbus interface or optional KNX module (KWL-KNX Connect, accessories).
- **Electrical connection**  
Fixed connection via a mains connection cable 3 x 1.5 mm<sup>2</sup>, approx. 2 m with wire end ferrules.
- **Accessories – Functional description (see right for details)**  
KWL 170 W can be individually expanded with the following accessories:
  - **Control element ECO**
    - Three ventilation profiles selectable via slide switch.
    - Control voltage can be measured directly on the control element.
    - LED for visual indication of operating statuses, e.g. filter replacement and faults.
  - **Control element Touch**  
Touch control element with graphic display and user-friendly menu navigation:
    - Commissioning assistant.
    - Selection of four ventilation profiles.
    - Adjustment of an individual weekly programme.
    - Adjustment of parameters for room sensors.
    - Indication of e.g. filter replacement, operating statuses and error messages.
- Different access authorisations and child lock.
- Other functions (see operating instructions).
- **KNX/EIB module**  
For connecting the ventilation unit to the building control system via the KNX Connect module.
- **Room sensors**  
Room sensors, which measure the mixed gas, CO<sub>2</sub> concentration or relative room air humidity, are available for automatic operation and optimal air exchange.
- **Post-heating**  
Helios easyControls 3.0 can be used with an electric post-heating element (EHR with KWL-LTK, accessories). The autonomous operation of the warm water heating element can be controlled via an air temperature control (WHS HE, accessories) independently from Helios easyControls 3.0.

References	Page
<b>Helios easyControls 3.0</b>	
<b>The innovative KWL control concept</b>	22 f.
<b>Moisture recovery through enthalpy heat exchangers</b>	21

### Performance curves KWL 170 W

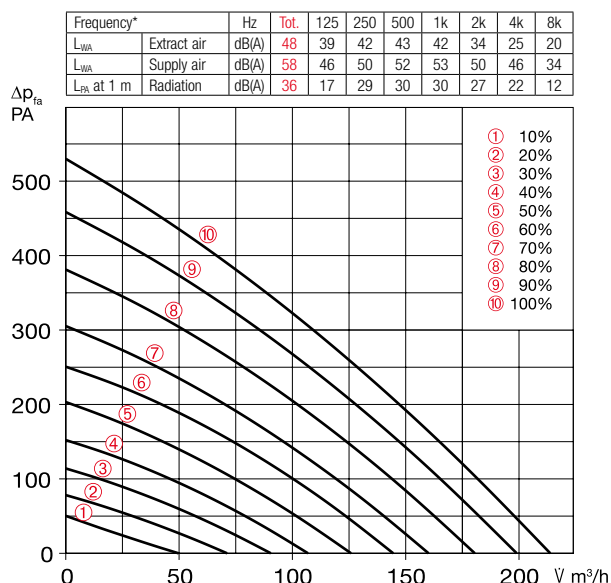

\*Sound information relate to Vref. according to ERP data sheet.

#### Slide switch control element

**KWL BE ECO** Ref. no. 20246

Three-step slide switch including operation indicator, for flush-mounted installation. Function see left.

Dim. mm (W x H x D) 80 x 80 x 37

#### Casing for surface installation

**KWL APG** Ref. no. 04270

Dim. mm (W x H x D) 83 x 83 x 41

#### Touch control element

**KWL BE Touch bl**

(black) Ref. no. 20244

**KWL BE Touch wh**

(white) Ref. no. 20245

With graphic display, for flush-mounted installation. Function see left. Connection of up to 6 pcs.

possible (additional power supply unit may be required). Can be integrated in common switch ranges with the dimensions mm (W x H x D) 55 x 55 x 35, Dim. with frame mm (W x H x D) 88 x 88 x 35

#### Casing for surface installation

**KWL APG Touch bl** No. 40178

**KWL APG Touch wh** No. 40177

Dim mm (W x H x D) 85 x 85 x 25

#### Control line cable

**KWL-SL eC 5m** Ref. no. 40179

**KWL-SL eC 10m** Ref. no. 40180



Control line cables in 5 or 10 meters, suitable for KWL-BE ECO / Touch as well as room sensor.

#### KNX/EIB module

**KWL-KNX Connect** No. 20253

For integrating the ventilation unit in a KNX system. For switch cabinet installation (1 space unit required).

#### Room sensors

**KWL-CO2 eC** Ref. no. 20248

**KWL-FTF eC** Ref. no. 20249

**KWL-VOC eC** Ref. no. 20247

For measuring the CO<sub>2</sub>, mixed gas (VOC) concentration or relative room air humidity. Please note the maximum number of sensors, additional power supply unit may be required.

Dim. mm (W x H x D) 98 x 98 x 33

#### Electric preheater

**KWL-EVH 170 W** No. 00936

Electrical preheater for simple, plug-in unit installation. For preheating the intake air at very low outdoor temperatures (heat exchanger anti-icing protection). Mandatory for passive houses. Output: 1000 W.

#### Extension module

**KWL-EM eC** Ref. no. 40155

For controlling external post-heating elements.

Dim. mm (W x H x D) 210 x 210 x 100

#### Motion detector

**BWM** Ref. no. 08323

Motion detector for detecting the presence of persons in the room. Surface-mounted wall installation (cable entry at top or bottom) or installation in flush-mounted box Ø 55 mm (cable entry at back).

#### Electric post-heating element

For additional supply air heating.

**EHR-R 1.2/125** Ref. no. 09433

**Rectangular duct temp. sensor**

**KWL-LTK eC** (1 pc. req.) No. 40156

#### Warm water post-heating element

For additional supply air heating.

**WHR 125** Ref. no. 09480

**Rectangular duct temp. sensor**

**KWL-LTK eC** (2 pc. req.) No. 40156




#### Hydraulic unit

**WHSH HE 24 V (0-10V)** No. 08318

Alternative:

#### Air temperature control

**WHST 300 T38** Ref. no. 08817

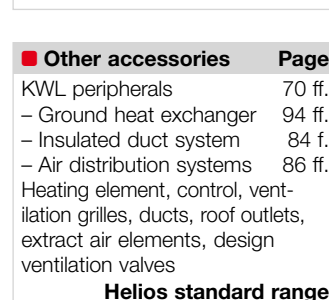

Technical data	With plastic heat exchanger				With enthalpy heat exchanger			
	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
	<b>KWL 170 W</b>	40043	<b>KWL 170 W ET</b>	40044				
<b>Flow rate at level 1) 2)</b>	⑩ ⑧ ⑥ ④ ②		⑩ ⑧ ⑥ ④ ②					
Supply air/extract air V m³/h	210 180 145 107 71		210 179 142 107 69					
Power consumption fans 2xW 1)	37 25 15 9 6		37 24 15 9 6					
Voltage/Frequency	1~, 230 V, 50 Hz							
Rated current A – ventilation	0.7							
– preheating	4.4							
– max. total	0.7 (5.1 incl. preheater, accessories)							
Electric preheater kW	1.0 kW (accessories)							
Summer bypass	automatic (adjustable), with heat exchanger cover							
Wiring diagram no.	1433							
Temperature operating range	–20 °C to +40 °C							
Installation temperature	+5 °C to +40 °C (90% rel. humidity, non-condensin)							
Weight approx. kg	36				39			

1) At 0 Pa, performance levels adjustable. 2) Volume reduction by approx. 10% when using pollen filter.

#### ■ Circular duct connector

Connector with seal for unit connection to circular duct system with Ø 125 mm.

RVBD 125 K No. 03414

#### ■ Other accessories

	Page
KWL peripherals	70 ff.
– Ground heat exchanger	94 ff.
– Insulated duct system	84 f.
– Air distribution systems	86 ff.
Heating element, control, ventilation grilles, ducts, roof outlets, extract air elements, design ventilation valves	

**Helios standard range**

#### ■ Replacement air filters

– 2 pcs. ISO Coarse 65% (G4)

ELF-KWL 170/4/4 No. 00951

– 1 pc. ISO ePM<sub>1</sub> 50% (F7)

ELF-KWL 170/7 No. 00965

#### ■ Reference

**Enthalpy heat exchanger**

**(accessories) for retrofitting:**

KWL-ET 170 No. 00976

## KWL 200 W



**Compact unit with heat recovery for the central supply and extract ventilation of residential buildings and apartments. Perfectly prepared for modern communication and operation with the new Helios easyControls 3.0 control system incl. integrated network connection. Equipped with EC fans for low energy consumption and highly efficient plastic or enthalpy heat exchangers for additional moisture recovery.**

### ■ Casing

Made of galvanised steel sheet, powder-coated in white, double-walled, with 12 mm heat and sound insulation on all sides. Installation-friendly and maintenance-friendly. All elements are easily accessible through removable front panels.

### ■ Heat exchanger

- ☐ Large cross counterflow heat exchanger made of plastic, heat recovery efficiency up to 90 %.
- ☐ Types "ET" are equipped with highly efficient enthalpy heat exchanger for additional moisture recovery.

### ■ Fans

Two low-noise high-performance centrifugal fans with energy-saving EC motors ensure the air supply and extraction.

### ■ Ducts

Installation-friendly connection of intake, exhaust, extract and supply air through ducts with NW 125 mm using duct connectors (RVBD 125 K, accessories).

### ■ Condensate connection

Condensate drain at the bottom; ball siphon included in delivery. On-site connection to drain pipe.

### ■ Air filter

Clean outdoor air supply via ISO Coarse 75 % (G4) filter and 2nd filter stage via optional ISO ePM<sub>1</sub> 50 % (F7) or activated carbon filter. Extract air side equipped with an ISO Coarse 75 % (G4) filter in front of the heat exchanger.

### ■ Summer operation

Equipped with automatic bypass function and heat exchanger cover as standard.

### ■ Heat exchanger anti-icing protection


The standard frost monitoring system automatically controls the supply air flow volume and the optionally installed electrical preheater (KWL-EVH 200 W, accessories).

### ■ Control system


EasyControls 3.0 is the new, modern control system for all KWL compact units from Helios. The standard LAN interface allows the simple integration of the KWL unit in a network and the integration in Helios Cloud. The unit is optionally controlled via an external control element, on PC/laptop, tablet and Smartphone via the integrated web browser or on the move via the Cloud. See page 22 for functionality. Helios easyControls 3.0 is prepared for:

- ☐ The control elements KWL-BE ECO and KWL-BE Touch (optional accessories)
- ☐ The humidity sensor integrated as standard and other optionally available external air quality

## Dimensions KWL 200 W R

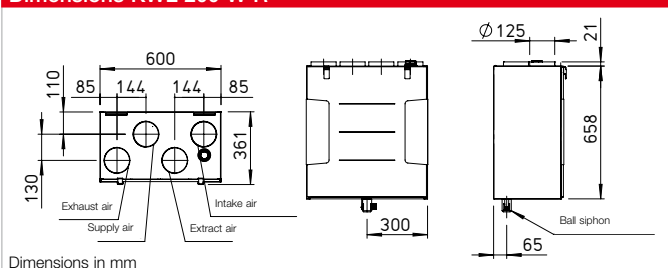

## Dimensions KWL 200 W L

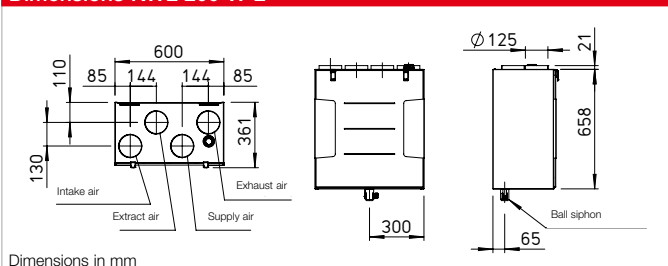

sensors (KWL-CO<sub>2</sub> eC, -FTF eC, -VOC eC, accessories) enable automatic, demand-controlled ventilation.

- ☐ Connection to building control system via integrated Modbus interface or optional KNX module (KWL-KNX Connect, accessories).

### ■ Electrical connection

Fixed connection via a mains connection cable 3 x 1.5 mm<sup>2</sup>, approx. 2 m with wire end ferrules.

### ■ Accessories – Functional description (see right for details)

KWL 200 W can be individually expanded with the following accessories:

#### ☐ Control element ECO

- Three ventilation profiles selectable via slide switch.
- Control voltage can be measured directly on the control element.
- LED for visual indication of operating statuses, e.g. filter replacement and faults.

#### ☐ Control element Touch

- Touch control element with graphic display and user-friendly menu navigation:
  - Commissioning assistant.
  - Selection of four ventilation profiles.
  - Adjustment of an individual weekly programme.
  - Adjustment of parameters for room sensors.
  - Indication of e.g. filter replacement, operating statuses and error messages.
  - Different access authorisations and child lock.
  - Other functions (see operating instructions).

#### ☐ KNX/EIB module

For connecting the ventilation unit to the building control system via the KNX Connect module.

#### ☐ Room sensors


Room sensors, which measure the mixed gas, CO<sub>2</sub> concentration or relative room air humidity, are available for automatic operation and optimal air exchange.

#### ☐ Post-heating

Helios easyControls 3.0 can be used with an electric post-heating element (EHR with KWL-LTK, accessories). The autonomous operation of the warm water heating element can be controlled via an air temperature control (WHS HE, accessories) independently from Helios easyControls 3.0.

■ References	Page
<b>Helios easyControls 3.0</b>	
<b>The innovative KWL control concept</b>	22 f.
<b>Moisture recovery through enthalpy heat exchangers</b>	21

### Performance curves KWL 200 W

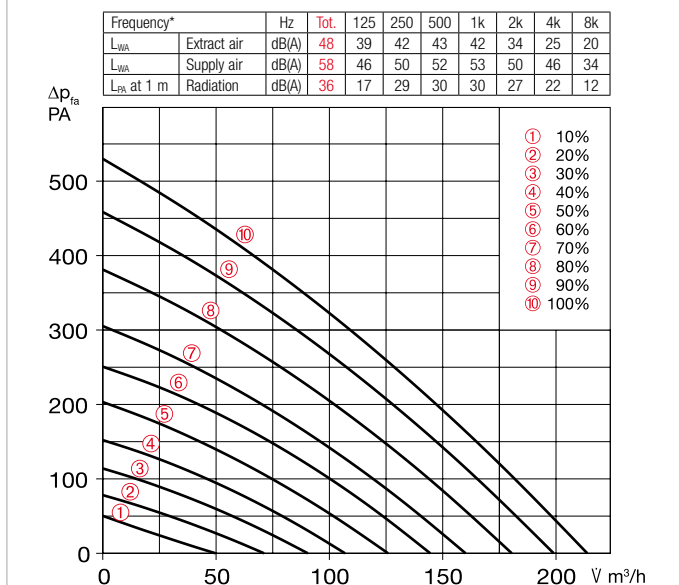

\*Sound information relate to Vref. according to ERP data sheet.

#### Slide switch control element

**KWL BE ECO** Ref. no. 20246

Three-step slide switch including operation indicator, for flush-mounted installation. Function see left.

Dim. mm (W x H x D) 80 x 80 x 37

#### Casing for surface installation

**KWL APG** Ref. no. 04270

Dim. mm (W x H x D) 83 x 83 x 41

#### Touch control element

**KWL BE Touch bl**

(black) Ref. no. 20244

**KWL BE Touch wh**

(white) Ref. no. 20245

With graphic display, for flush-mounted installation. Function see left. Connection of up to 6 pcs. possible (additional power supply unit may be required). Can be integrated in common switch ranges with the dim. mm (W x H x D) 55 x 55 x 35, Dim. with frame mm (W x H x D) 88 x 88 x 35

#### Casing for surface installation

**KWL APG Touch bl** No. 40178

**KWL APG Touch wh** No. 40177

Dim mm (W x H x D) 85 x 85 x 25

#### Control line cable

**KWL-SL eC 5m** Ref. no. 40179

**KWL-SL eC 10m** Ref. no. 40180



Control line cables in 5 or 10 meters, suitable for KWL-BE ECO / Touch as well as room sensor.

Technical data	With plastic heat exchanger					With enthalpy heat exchanger				
	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
<b>Right-hand version</b>	<b>KWL 200 W R</b>	40045	<b>KWL 200 W ET R</b>	40047	<b>Left-hand version</b>	<b>KWL 200 W L</b>	40046	<b>KWL 200 W ET L</b>	40048	
<b>Flow rate at level 1) 2)</b>										
Supply air/extract air V m³/h	214	175	129	71	46	190	151	111	73	39
Power consumption fans 2xW 1)	40	26	16	8	5	40	26	16	8	5
Voltage/Frequency	1~, 230 V, 50 Hz									
Rated current A – ventilation	1.2									
– preheating	4.4									
– max. total	1.2 (5.6 incl. preheater, accessories)									
Electric preheater kW	1.0 kW (accessories)									
Summer bypass	automatic (adjustable), with heat exchanger cover									
Wiring diagram no.	1433									
Temperature operating range	– 20 °C to + 40 °C									
Installation temperature	+ 5 °C to + 40 °C (90 % rel. humidity, non-condensing)									
Weight approx. kg	37					41				

1) At 0 Pa, performance levels adjustable. 2) Volume reduction by approx. 10 % when using pollen filter.

3) AK = Activated carbon filter

#### KNX/EIB module

**KWL-KNX Connect** No. 20253

For integrating the ventilation unit in a KNX system. For switch cabinet installation (1 space unit required).

#### Room sensors

**KWL-CO2 eC** Ref. no. 20248

**KWL-FTF eC** Ref. no. 20249

**KWL-VOC eC** Ref. no. 20247

For measuring the CO<sub>2</sub>, mixed gas (VOC) concentration or relative room air humidity. Please note the maximum number of sensors, additional power supply unit may be required.

Dim. mm (W x H x D) 98 x 98 x 33

#### Electric preheater

**KWL-EVH 200 W** No. 04224

Electrical preheater for simple, plug-in unit installation. For preheating the intake air at very low outdoor temperatures (heat exchanger anti-icing protection). Mandatory for passive houses. Output: 1000 W.

#### Extension module

**KWL-EM eC** Ref. no. 40155

For controlling external post-heating elements.

Dim. mm (W x H x D) 210 x 210 x 100

#### Motion detector

**BWM** Ref. no. 08323

Motion detector for detecting the presence of persons in the room. Surface-mounted wall installation (cable entry at top or bottom) or installation in flush-mounted box Ø 55 mm (cable entry at back).

#### Electric post-heating element

For additional supply air heating.

**EHR-R 1.2/125** Ref. no. 09433

**Rectangular duct temp. sensor**

**KWL-LTK eC** (1 pc. req.) No. 40156

#### Warm water post-heating element

For additional supply air heating.

**WHR 125** Ref. no. 09480

**Rectangular duct temp. sensor**

**KWL-LTK eC** (2 pc. req.) No. 40156

#### Hydraulic unit

**WHSR HE 24 V (0-10V)** No. 08318

Alternative:

#### Air temperature control

**WHST 300 T38** Ref. no. 08817

#### Replacement air filters

– 2 pcs. **ISO Coarse 75 % (G4)**

ELF-KWL 200/4/4 No. 00021

– 1 pc. **ISO ePM<sub>1</sub> 50 % (F7)**

ELF-KWL 200/7 No. 00038


– 1 pc. **ISO ePM<sub>2.5</sub> 60 % (AK)<sup>3)</sup>**

ELF-KWL 200 AK No. 04198

#### Reference

**Enthalpy heat exchanger (accessories) for retrofitting:**

**KWL-ET 200** No. 00896



#### ■ Circular duct connector

Connector with seal for unit connection to circular duct system with Ø 125 mm.

RVBD 125 K No. 03414

#### ■ Other accessories

	Page
KWL peripherals	70 ff.
– Ground heat exchanger	94 ff.
– Insulated duct system	84 f.
– Air distribution systems	86 ff.
Heating element, control, ventilation grilles, ducts, roof outlets, extract air elements, design ventilation valves	

**Helios standard range**

## KWL 250 W



### Efficiency class

<b>A+</b>	KWL 250 W with additional room sensor
<b>A</b>	KWL 250 W



Compact unit with heat recovery for the central supply and extract ventilation of residential units up to 190 m². Perfectly prepared for modern communication and operation with the new Helios easyControls 3.0 control system incl. integrated network connection. Equipped with EC fans for low energy consumption and highly efficient plastic or enthalpy heat exchangers for additional moisture recovery.

### ■ Casing

**Universal casing concept:**  
Intake air left/right, supply air top or bottom.

Outside made of galvanised steel sheet in white, internal components made of highly thermal insulating EPP. The intake air connection can be installed on the left or right. Maintenance-friendly access to all unit components through removeable front panels. Delivery state: Intake air on the right.

### ■ Heat exchanger

- ☐ Large cross counterflow heat exchanger made of plastic, heat recovery efficiency up to 90 %.
- ☐ Type "ET" is equipped with highly efficient enthalpy heat exchanger for additional moisture recovery.

### ■ Fans

Two low-noise high-performance centrifugal fans with energy-saving EC motors ensure the air supply and extraction.

### ■ Ducts

Installation-friendly connection of intake, exhaust, extract and supply air through ducts with NW 125 mm using duct connectors (RVBD 125 K, accessories).

### ■ Condensate connection

Condensate drain at the bottom; ball siphon included in delivery. On-site connection to drain pipe.

### ■ Air filter

Clean outdoor air supply via ISO Coarse 65 % (G4) filter and 2nd filter stage via optional ISO ePM, 50 % (F7) or activated carbon filter. Extract air side equipped with an ISO Coarse 65 % (G4) filter in front of the heat exchanger. Easy filter maintenance without opening the unit.

### ■ Summer operation

Equipped with automatic bypass function and heat exchanger cover as standard.

### ■ Heat exchanger anti-icing protection


The standard frost monitoring system automatically controls the supply air flow volume and the optionally installed electrical preheater (KWL-EVH 250 W, accessories).

### ■ Control system


EasyControls 3.0 is the new, modern control system for all KWL compact units from Helios. The standard LAN interface allows the simple integration of the KWL unit in a network and the integration in Helios Cloud. The unit is optionally controlled via an external control element, on PC/laptop, tablet and Smartphone via the integrated web browser or on the move via the Cloud. See page 22 for functionality. Helios easyControls 3.0 is prepared for:

- ☐ The control elements KWL-BE ECO and KWL-BE Touch (optional accessories)
- ☐ The humidity sensor integrated as standard and other optionally available external air quality

## Dimensions KWL 250 W



Dimensions in mm



sensors (KWL-CO2 eC, -FTF eC, -VOC eC, accessories) enable automatic, demand-controlled ventilation.

- ☐ Connection to building control system via integrated Modbus interface or optional KNX module (KWL-KNX Connect, accessories).

### ■ Electrical connection

Fixed connection via a mains connection cable 3 x 1.5 mm², approx. 2 m with wire end ferrules.

### ■ Accessories – Functional description (see right for details)

KWL 250 W can be individually expanded with the following accessories:

- ☐ **Control element ECO**
  - Three ventilation profiles selectable via slide switch.
  - Control voltage can be measured directly on the control element.
  - LED for visual indication of operating statuses, e.g. filter replacement and faults.
- ☐ **Control element Touch**
  - Touch control element with graphic display and user-friendly menu navigation:
    - Commissioning assistant.
    - Selection of four ventilation profiles.
    - Adjustment of an individual weekly programme.
    - Adjustment of parameters for room sensors.
    - Indication of e.g. filter replacement, operating statuses and error messages.
    - Different access authorisations and child lock.
    - Other functions (see operating instructions).

### ☐ KNX/EIB module

For connecting the ventilation unit to the building control system via the KNX Connect module.

### ☐ Room sensors


Room sensors, which measure the mixed gas, CO<sub>2</sub> concentration or relative room air humidity, are available for automatic operation and optimal air exchange.

### ☐ Post-heating

Helios easyControls 3.0 can be used with an electric post-heating element (EHR with KWL-LTK, accessories). The autonomous operation of the warm water heating element can be controlled via an air temperature control (WHS HE, accessories) independently from Helios easyControls 3.0.

■ References	Page
<b>Helios easyControls 3.0</b> <b>The innovative KWL control concept</b>	22 f.
<b>Moisture recovery through enthalpy heat exchangers</b>	21

### Performance curves KWL 250 W

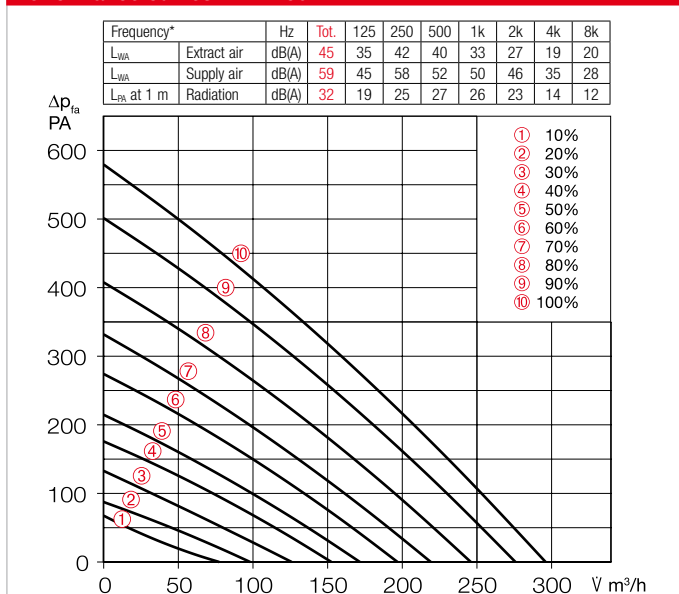

#### Slide switch control element

**KWL BE ECO** Ref. no. 20246

Three-step slide switch including operation indicator, for flush-mounted installation. Function see left.

Dim. mm (W x H x D) 80 x 80 x 37

#### Casing for surface installation

**KWL APG** Ref. no. 04270

Dim. mm (W x H x D) 83 x 83 x 41

#### Touch control element

**KWL BE Touch bl**

(black) Ref. no. 20244

**KWL BE Touch wh**

(white) Ref. no. 20245

With graphic display, for flush-mounted installation. Function see left. Connection of up to 6 pcs.

possible (additional power supply unit may be required). Can be integrated in common switch ranges with the dimensions mm (W x H x D) 55 x 55 x 35, Dim. with frame mm (W x H x D) 88 x 88 x 35

#### Casing for surface installation

**KWL APG Touch bl** No. 40178

**KWL APG Touch wh** No. 40177

Dim mm (W x H x D) 85 x 85 x 25

#### Control line cable

**KWL-SL eC 5m** Ref. no. 40179

**KWL-SL eC 10m** Ref. no. 40180



Control line cables in 5 or 10 meters, suitable for KWL-BE ECO / Touch as well as room sensor.

#### KNX/EIB module

**KWL-KNX Connect** No. 20253

For integrating the ventilation unit in a KNX system. For switch cabinet installation (1 space unit required).

#### Room sensors

**KWL-CO2 eC** Ref. no. 20248

**KWL-FTF eC** Ref. no. 20249

**KWL-VOC eC** Ref. no. 20247

For measuring the CO<sub>2</sub>, mixed gas (VOC) concentration or relative room air humidity. Please note the maximum number of sensors, additional power supply unit may be required.

Dim. mm (W x H x D) 98 x 98 x 33

#### Electric preheater

**KWL-EVH 250 W** No. 40157

Electrical preheater for simple, plug-in unit installation. For preheating the intake air at very low outdoor temperatures (heat exchanger anti-icing protection). Mandatory for passive houses. Output: 1000 W.

#### Extension module

**KWL-EM eC** Ref. no. 40155

For controlling external post-heating elements.

Dim. mm (W x H x D) 210 x 210 x 100

#### Motion detector

**BWM** Ref. no. 08323

Motion detector for detecting the presence of persons in the room. Surface-mounted wall installation (cable entry at top or bottom) or installation in flush-mounted box Ø 55 mm (cable entry at back).

#### Electric post-heating element

For additional supply air heating.

**EHR-R 1.2/125** Ref. no. 09433

**Rectangular duct temp. sensor**

**KWL-LTK eC** (1 pc. req.) No. 40156

#### Warm water post-heating element

For additional supply air heating.

**WHR 125** Ref. no. 09480

**Rectangular duct temp. sensor**

**KWL-LTK eC** (2 pc. req.) No. 40156

**Hydraulic unit**

**WHSR HE 24 V (0-10V)** No. 08318

Alternative:

#### Air temperature control

**WHST 300 T38** Ref. no. 08817

#### Replacement air filters

– 2 pcs. ISO Coarse 65% (G4)

ELF-KWL 250/2xCoarse65%

Ref. no. 40151

– 1 pc. ISO ePM<sub>1</sub>, 50% (F7)

ELF-KWL 250/ePM1 50%

Ref. no. 40152

– 1 pc. Activated carbon filter




ELF-KWL 250 AK No. 40153

#### Reference

**Enthalpy heat exchanger**

**(accessories) for retrofitting:**

KWL-ET 250 Nr. 40159



**■ Circular duct connector**  
Connector with seal for unit connection to circular duct system with Ø 125 mm.  
RVBD 125 K No. 03414

#### Other accessories

	Page
KWL peripherals	70 ff.
– Ground heat exchanger	94 ff.
– Insulated duct system	84 f.
– Air distribution systems	86 ff.
Heating element, control, ventilation grilles, ducts, roof outlets, extract air elements, design ventilation valves	

**Helios standard range**

Technical data	With plastic heat exchanger					With enthalpy heat exchanger				
	Type	Ref. no.				Type	Ref. no.			
	KWL 250 W	40149				KWL 250 W ET	40150			
Flow rate at level <sup>1) 2)</sup>	⑩	⑧	⑥	④	②	⑩	⑧	⑥	④	②
Supply air/extract air V m³/h	296	246	197	153	98	302	246	197	154	103
Power consumption fans 2xW <sup>1)</sup>	51	33	20	13	7	52	32	22	13	8
Voltage/Frequency	1~, 230 V, 50 Hz									
Rated current A – ventilation	1,5									
– preheating	4,4									
– max. total	1.5 (5.9 incl. preheater, accessories)									
Electric preheater kW	1.0 kW (accessories)									
Summer bypass	automatic (adjustable), with heat exchanger cover									
Wiring diagram no.	1433									
Temperature operating range	–20 °C to +40 °C									
Installation temperature	+ 5 °C to +40 °C (90% rel. humidity, non-condensing)									
Weight approx. kg	43					47				

1) At 0 Pa, performance levels adjustable. 2) Volume reduction by approx. 10% when using pollen filter.

## KWL 300 W



**Compact units with heat recovery for the central supply and extract ventilation of residential buildings and apartments. Perfectly prepared for modern communication and operation with the new Helios easyControls 3.0 control system incl. integrated network connection. Equipped with EC fans for low energy consumption and highly efficient plastic or enthalpy heat exchangers for additional moisture recovery.**

### ■ Casing

Made of galvanised steel sheet, powder-coated in white, double-walled, with 12 mm heat and sound insulation on all sides. Installation-friendly and maintenance-friendly. All elements are easily accessible through removable front panels.

### ■ Heat exchanger

- ☐ Large cross counterflow heat exchanger made of plastic, heat recovery efficiency up to 90 %.
- ☐ Types "ET" are equipped with highly efficient enthalpy heat exchanger for additional moisture recovery.

### ■ Fans

Two low-noise high-performance centrifugal fans with energy-saving EC motors ensure the air supply and extraction.

### ■ Ducts

Installation-friendly connection of intake, exhaust, extract and supply air through ducts with NW 125 mm using duct connectors (RVBD 125 K, accessories).

### ■ Condensate connection

Condensate drain at the bottom; ball siphon included in delivery. On-site connection to drain pipe.

### ■ Air filter

Clean outdoor air supply via ISO Coarse 75 % (G4) filter and 2nd filter stage via optional ISO ePM<sub>1</sub> 50 % (F7) or activated carbon filter. Extract air side equipped with an ISO Coarse 75 % (G4) filter in front of the heat exchanger.

### ■ Summer operation

Equipped with automatic bypass function and heat exchanger cover as standard.

### ■ Heat exchanger anti-icing protection


The standard frost monitoring system automatically controls the supply air flow volume and the optionally installed electrical preheater (KWL-EVH 300 W, accessories).

### ■ Control system


EasyControls 3.0 is the new, modern control system for all KWL compact units from Helios. The standard LAN interface allows the simple integration of the KWL unit in a network and the integration in Helios Cloud. The unit is optionally controlled via an external control element, on PC/laptop, tablet and Smartphone via the integrated web browser or on the move via the Cloud. See page 22 for functionality. Helios easyControls 3.0 is prepared for:

- ☐ The control elements KWL-BE ECO and KWL-BE Touch (optional accessories)
- ☐ The humidity sensor integrated as standard and other optionally available external air quality sensors (KWL-CO2 eC, -FTF eC,

## Dimensions KWL 300 W R

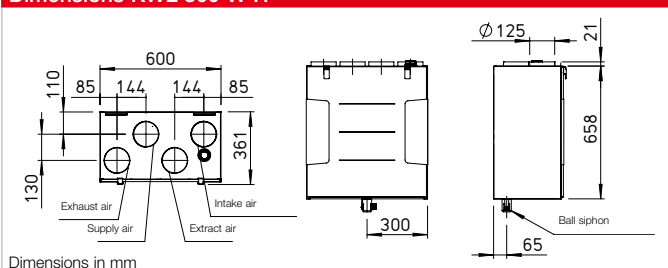

## Dimensions KWL 300 W L

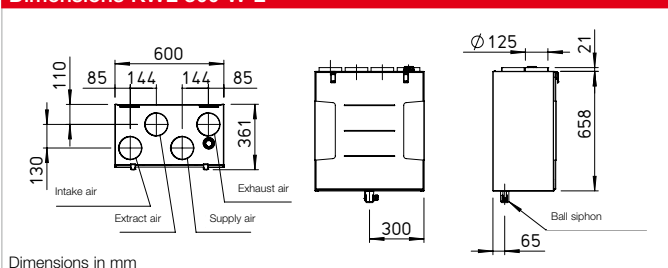

-VOC eC, accessories) enable automatic, demand-controlled ventilation.

- ☐ Connection to building control system via integrated Modbus interface or optional KNX module (KWL-KNX Connect, accessories).

### ■ Electrical connection

Fixed connection via a mains connection cable 3 x 1.5 mm², approx. 2 m with wire end ferrules.

### ■ Accessories – Functional description (see right for details)

KWL 300 W can be individually expanded with the following accessories:

#### ☐ Control element ECO

- Three ventilation profiles selectable via slide switch.
- Control voltage can be measured directly on the control element.
- LED for visual indication of operating statuses, e.g. filter replacement and faults.

#### ☐ Control element Touch

- Touch control element with graphic display and user-friendly menu navigation:
- Commissioning assistant.
- Selection of four ventilation profiles.
- Adjustment of an individual weekly programme.
- Adjustment of parameters for room sensors.
- Indication of e.g. filter replacement, operating statuses and error messages.
- Different access authorisations and child lock.
- Other functions (see operating instructions).

#### ☐ KNX/EIB module

For connecting the ventilation unit to the building control system via the KNX Connect module.

#### ☐ Room sensors


Room sensors, which measure the mixed gas, CO<sub>2</sub> concentration or relative room air humidity, are available for automatic operation and optimal air exchange.

#### ☐ Post-heating

Helios easyControls 3.0 can be used with an electric post-heating element (EHR with KWL-LTK, accessories). The autonomous operation of the warm water heating element can be controlled via an air temperature control (WHS HE, accessories) independently from Helios easyControls 3.0.

■ References	Page
<b>Helios easyControls 3.0</b>	
<b>The innovative KWL control concept</b>	22 f.
<b>Moisture recovery through enthalpy heat exchangers</b>	21

### Performance curves KWL 300 W

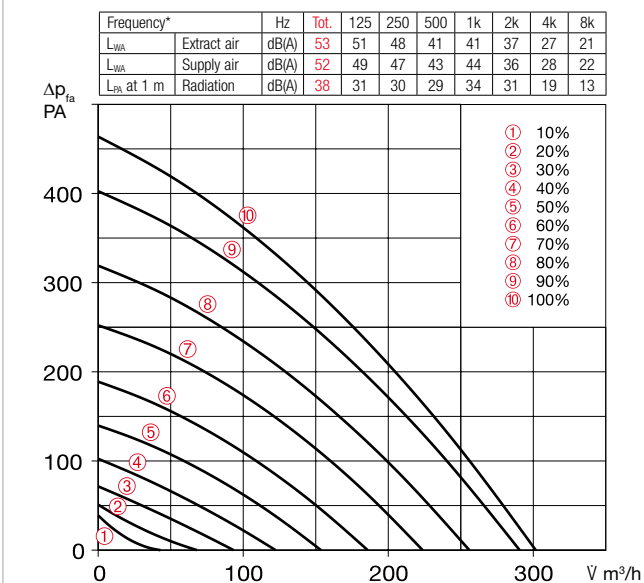

### Slide switch control element

**KWL BE ECO** Ref. no. 20246

Three-step slide switch including operation indicator, for flush-mounted installation. Function see left.

Dim. mm (W x H x D) 80 x 80 x 37

### Casing for surface installation

**KWL APG** Ref. no. 04270

Dim. mm (W x H x D) 83 x 83 x 41

### Touch control element

**KWL BE Touch bl**

(black) Ref. no. 20244

**KWL BE Touch wh**

(white) Ref. no. 20245

With graphic display, for flush-mounted installation. Function see left. Connection of up to 6 pcs.

possible (additional power supply unit may be required). Can be integrated in common switch ranges with the dimensions mm (W x H x D) 55 x 55 x 35, Dim. with frame mm (W x H x D) 88 x 88 x 35

### Casing for surface installation

**KWL APG Touch bl** No. 40178

**KWL APG Touch wh** No. 40177

Dim mm (W x H x D) 85 x 85 x 25

### Control line cable

**KWL-SL eC 5m** Ref. no. 40179

**KWL-SL eC 10m** Ref. no. 40180

Control line cables in 5 or 10 meters, suitable for KWL-BE ECO / Touch as well as room sensor.

Technical data	With plastic heat exchanger					With enthalpy heat exchanger				
	Type	Ref. no.				Type	Ref. no.			
Right-hand version	KWL 300 W R	40049				KWL 300 W ET R	40051			
Left-hand version	KWL 300 W L	40050				KWL 300 W ET L	40052			
Flow rate at level <sup>1) 2)</sup>	⑩	⑨	⑧	④	②	⑩	⑨	⑧	④	②
Supply air/extract air V̇ m³/h	301	255	186	122	68	270	216	161	107	56
Power consumption fans 2xW <sup>1)</sup>	84	54	27	13	6	86	54	27	13	7
Voltage/Frequency	1~, 230 V, 50 Hz									
Rated current A – ventilation	2.0									
– preheating	4.4									
– max. total	2.0 (6.4 incl. preheater, accessories)									
Electric preheater kW	1.0 kW (accessories)									
Summer bypass	automatic (adjustable), with heat exchanger cover									
Wiring diagram no.	1433									
Temperature operating range	–20 °C to +40 °C									
Installation temperature	+ 5 °C to + 40 °C (90 % rel. humidity, non-condensing)									
Weight approx. kg	37					41				

1) At 0 Pa, performance levels adjustable. 2) Volume reduction by approx. 10 % when using pollen filter.

3) AK = Activated carbon filter

### KNX/EIB module

**KWL-KNX Connect** No. 20253

For integrating the ventilation unit in a KNX system. For switch cabinet installation (1 space unit required).

### Room sensors

**KWL-CO2 eC** Ref. no. 20248

**KWL-FTF eC** Ref. no. 20249

**KWL-VOC eC** Ref. no. 20247

For measuring the CO<sub>2</sub>, mixed gas (VOC) concentration or relative room air humidity. Please note the maximum number of sensors, additional power supply unit may be required.

Dim. mm (W x H x D) 98 x 98 x 33

### Electric preheater

**KWL-EVH 300 W** No. 04224

Electrical preheater for simple, plug-in unit installation. For preheating the intake air at very low outdoor temperatures (heat exchanger anti-icing protection). Mandatory for passive houses. Output: 1000 W.

### Extension module

**KWL-EM eC** Ref. no. 40155

For controlling external post-heating elements.

Dim. mm (W x H x D) 210 x 210 x 100

### Motion detector

**BWM** Ref. no. 08323

Motion detector for detecting the presence of persons in the room. Surface-mounted wall installation (cable entry at top or bottom) or installation in flush-mounted box Ø 55 mm (cable entry at back).

### Electric post-heating element

For additional supply air heating.

**EHR-R 1.2/125** Ref. no. 09433

**Rectangular duct temp. sensor**

**KWL-LTK eC** (1 pc. req.) No. 40156

### Warm water post-heating element

For additional supply air heating.

**WHR 125** Ref. no. 09480

**Rectangular duct temp. sensor**

**KWL-LTK eC** (2 pc. req.) No. 40156


**Hydraulic unit**

**WHSH HE 24 V (0-10V)** No. 08318

Alternative:

**Air temperature control**

**WHST 300 T38** Ref. no. 08817



■ **Circular duct connector**  
Connector with seal for unit connection to circular duct system with Ø 125 mm.  
RVBD 125 K No. 03414

■ **Replacement air filters**  
– 2 pcs. **ISO Coarse 75 % (G4)**  
ELF-KWL 300/4/4 No. 00021  
– 1 pc. **ISO ePM, 50 % (F7)**  
ELF-KWL 300/7 No. 00038  
– 1 pc. **ISO ePM<sub>2.5</sub> 60 % (AK)<sup>3)</sup>**  
ELF-KWL 300 AK No. 04198

■ **Reference**  
**Enthalpy heat exchanger (accessories) for retrofitting:**  
KWL-ET 300 No. 00896

## KWL 360 W



 **Compact unit with heat recovery for the central supply and extract ventilation of residential buildings and apartments. Perfectly prepared for modern communication and operation with the new Helios easyControls 3.0 control system incl. integrated network connection. Equipped with EC fans for low energy consumption and highly efficient plastic or enthalpy heat exchangers for additional moisture recovery.**

■ **Casing**  
**Universal casing concept:** Intake air and exhaust air side left/right, with integrated sound insulation. Made of galvanised sheet steel with sound and heat insulation, powder-coated in white. The intake air and exhaust air connection can be on the left or right side. Maintenance-friendly access to all unit components through removable front panel. Delivery condition: Intake air and exhaust air side on the right.

■ **Heat exchanger**  
☐ Large cross counterflow heat exchanger made of plastic, heat recovery efficiency up to 90 %.  
☐ Type "ET" is equipped with highly efficient enthalpy heat exchanger for additional moisture recovery.

■ **Fans**  
Two low-noise high-performance centrifugal fans with energy-saving EC motors ensure the air supply and extraction.

■ **Ducts**  
Installation-friendly connection of intake, exhaust, extract and supply air through ducts with NW 160 mm using duct connectors (RVBD 160 K, accessories).

■ **Condensate connection**  
Condensate drain at the bottom; ball siphon included in delivery. On-site connection to drain pipe.


■ **Air filter**  
Clean outdoor air supply via ISO Coarse 65 % (G4) filter and 2nd filter stage via optional ISO ePM<sub>1</sub>, 50 % (F7) or activated carbon filter. Extract air side equipped with an ISO Coarse 65 % (G4) filter in front of the heat exchanger. Easy filter maintenance without opening the unit.

■ **Summer operation**  
Equipped with automatic bypass function and heat exchanger cover as standard.

■ **Heat exchanger anti-icing protection**  
The standard frost monitoring system automatically controls the supply air flow volume and the optionally installed electrical preheater (KWL-EVH 360/470 W, accessories).

■ **Control system**  
EasyControls 3.0 is the new, modern control system for all KWL compact units from Helios. The standard LAN interface allows the simple integration of the KWL unit in a network and the integration in Helios Cloud. The unit is optionally controlled via an external control element, on PC/laptop, tablet and Smartphone via the integrated web browser or on the move via the Cloud. See page 22 for func-

## Dimensions KWL 360 W

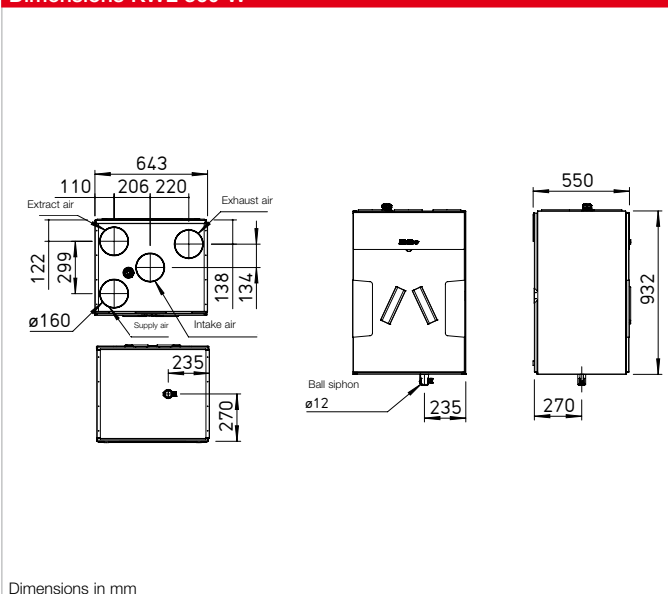

Dimensions in mm

tionality. Helios easyControls 3.0 is prepared for:

- ☐ The control elements KWL-BE ECO and KWL-BE Touch (optional accessories)
- ☐ The humidity sensor integrated as standard and other optionally available external air quality sensors (KWL-CO<sub>2</sub> eC, -FTF eC, -VOC eC, accessories) enable automatic, demand-controlled ventilation.
- ☐ Connection to building control system via integrated Modbus interface or optional KNX module (KWL-KNX Connect, accessories).

■ **Electrical connection**  
Fixed connection via a mains connection cable 3 x 1.5 mm², approx. 2 m with wire end ferrules.

■ **Accessories – Functional description (see right for details)**  
KWL 360 W can be individually expanded with the following accessories:

- ☐ **Control element ECO**
  - Three ventilation profiles selectable via slide switch.
  - Control voltage can be measured directly on the control element.
  - LED for visual indication of operating statuses, e.g. filter replacement and faults.

- ☐ **Control element Touch**  
Touch control element with graphic display and user-friendly menu navigation:
  - Commissioning assistant.
  - Selection of four ventilation profiles.
  - Adjustment of an individual weekly programme.
  - Adjustment of parameters for room sensors.
  - Indication of e.g. filter replace-

ment, operating statuses and error messages.

- Different access authorisations and child lock.
- Other functions (see operating instructions).


☐ **KNX/EIB module**  
For connecting the ventilation unit to the building control system via the KNX Connect module.

☐ **Room sensors**  
Room sensors, which measure the mixed gas, CO<sub>2</sub> concentration or relative room air humidity, are available for automatic operation and optimal air exchange.

☐ **Post-heating**  
Helios easyControls 3.0 can be used with an electric post-heating element (EHR with KWL-LTK, accessories). The autonomous operation of the warm water heating element can be controlled via an air temperature control (WHS HE, accessories) independently from Helios easyControls 3.0.

References	Page
<b>Helios easyControls 3.0</b>	
<b>The innovative KWL control concept</b>	22 f.
<b>Moisture recovery through enthalpy heat exchangers</b>	21

### Performance curves KWL 360 W

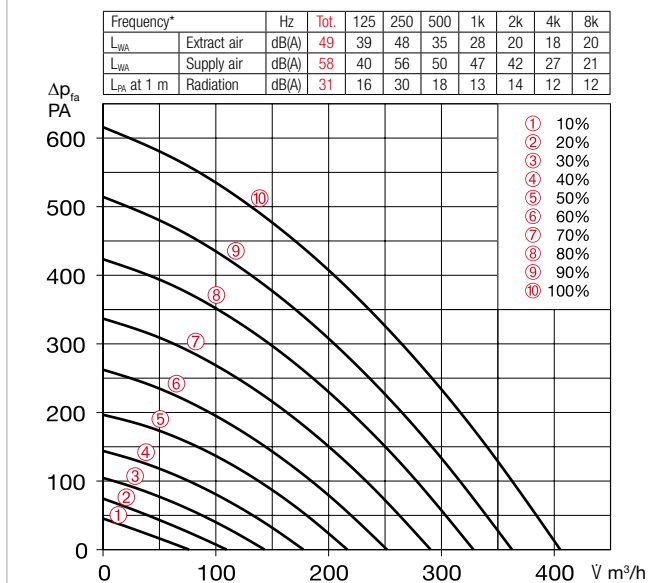

### Slide switch control element

**KWL BE ECO** Ref. no. 20246

Three-step slide switch including operation indicator, for flush-mounted installation. Function see left.

Dim. mm (W x H x D) 80 x 80 x 37

### Casing for surface installation

**KWL APG** Ref. no. 04270

Dim. mm (W x H x D) 83 x 83 x 41

### Touch control element

**KWL BE Touch bl**

(black) Ref. no. 20244

**KWL BE Touch wh**

(white) Ref. no. 20245

With graphic display, for flush-mounted installation. Function see left. Connection of up to 6 pcs. possible (additional power supply unit may be required). Can be integrated in common switch ranges with the dimensions mm (W x H x D) 55 x 55 x 35, Dim. with frame mm (W x H x D) 88 x 88 x 35

### Casing for surface installation

**KWL APG Touch bl** No. 40178

**KWL APG Touch wh** No. 40177

Dim mm (W x H x D) 85 x 85 x 25

### Control line cable

**KWL-SL eC 5m** Ref. no. 40179

**KWL-SL eC 10m** Ref. no. 40180

Control line cables in 5 or 10 meters, suitable for KWL-BE ECO / Touch as well as room sensor.

Technical data	With plastic heat exchanger					With enthalpy heat exchanger				
	Type	Ref. no.	Type	Ref. no.		Type	Ref. no.	Type	Ref. no.	
	<b>KWL 360 W</b>	40061	<b>KWL 360 W ET</b>	40062						
<b>Flow rate at level 1) 2)</b>	⑩ ⑧ ⑥ ④ ②		⑩ ⑧ ⑥ ④ ②							
Supply air/extract air V m³/h	405 328 252 178 110		402 332 264 192 121							
Power consumption fans 2xW 1)	51 30 17 10 6		45 28 16 9 5							
Voltage/Frequency	1~, 230 V, 50 Hz									
Rated current A – ventilation	0.5									
– preheating	6.3									
– max. total	0.5 (6.8 incl. preheater, accessories)									
Electric preheater kW	1.5 kW (accessories)									
Summer bypass	automatic (adjustable), with heat exchanger cover									
Wiring diagram no.	1433									
Temperature operating range	–20 °C to +40 °C									
Installation temperature	+5 °C to +40 °C (90 % rel. humidity, non-condensing)									
Weight approx. kg	72					70				

1) At 0 Pa, performance levels adjustable. 2) Volume reduction by approx. 10% when using pollen filter.

### KNX/EIB module

**KWL-KNX Connect** No. 20253

For integrating the ventilation unit in a KNX system. For switch cabinet installation (1 space unit required).

### Room sensors

**KWL-CO2 eC** Ref. no. 20248

**KWL-FTF eC** Ref. no. 20249

**KWL-VOC eC** Ref. no. 20247

For measuring the CO<sub>2</sub>, mixed gas (VOC) concentration or relative room air humidity. Please note the maximum number of sensors, additional power supply unit may be required.

Dim. mm (W x H x D) 98 x 98 x 33

### Electric preheater

**KWL-EVH 360/470 W** No. 07360

Electrical preheater for simple, plug-in unit installation. For preheating the intake air at very low outdoor temperatures (heat exchanger anti-icing protection). Mandatory for passive houses. Output: 1500 W.

### Extension module

**KWL-EM eC** Ref. no. 40155

For controlling external post-heating elements.

Dim. mm (W x H x D) 210 x 210 x 100

### Motion detector

**BWM** Ref. no. 08323

Motion detector for detecting the presence of persons in the room. Surface-mounted wall installation (cable entry at top or bottom) or installation in flush-mounted box Ø 55 mm (cable entry at back).

### Electric post-heating element

For additional supply air heating.

**EHR-R 2.4/160** Ref. no. 09435

**Rectangular duct temp. sensor**

**KWL-LTK eC** (1 pc. req.) No. 40156

### Warm water post-heating element

For additional supply air heating.

**WHR 160** Ref. no. 09481

**Rectangular duct temp. sensor**

**KWL-LTK eC** (2 pc. req.) No. 40156

**Hydraulic unit**

**WHSH HE 24 V (0-10V)** No. 08318

Alternative:

**Air temperature control**

**WHST 300 T38** Ref. no. 08817

### ■ Circular duct connector

Connector with seal for unit connection to circular duct system with Ø 160 mm.

RVBD 160 K No. 03415

### ■ Replacement air filters

– 2 pcs. **ISO Coarse 65% (G4)**

ELF-KWL 360/470/4/4 No. 07371

– 1 pc. **ISO ePM, 50% (F7)**

ELF-KWL 360/470/7 No. 07375

– 1 pc. **Activated carbon filter**

ELF-KWL 360/470 AK No. 08129

### ■ Reference


**Enthalpy heat exchanger (accessories) for retrofitting:**

KWL-ET 360/470 No. 07354

## KWL 470 W



## Dimensions KWL 470 W

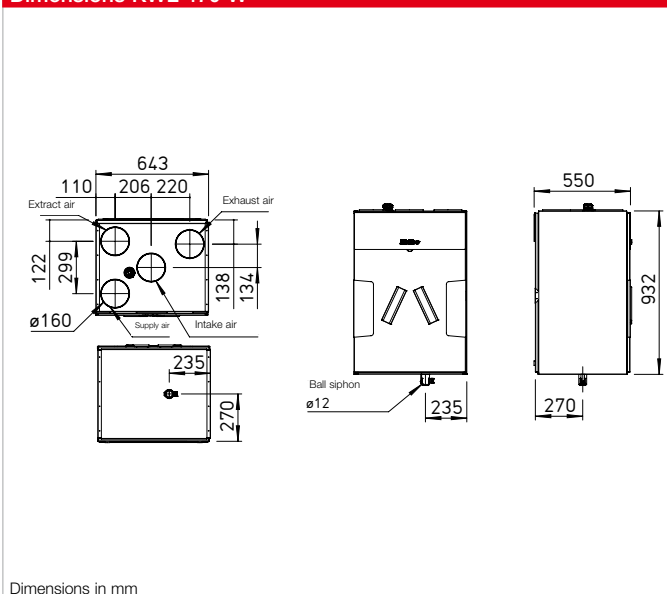

**Compact unit with heat recovery for the central supply and extract ventilation of residential buildings and apartments. Perfectly prepared for modern communication and operation with the new Helios easyControls 3.0 control system incl. integrated network connection. Equipped with EC fans for low energy consumption and highly efficient plastic or enthalpy heat exchangers for additional moisture recovery.**

**Casing**  
**Universal casing concept:** Intake air and exhaust air side left/right, with integrated sound insulation. Made of galvanised sheet steel with sound and heat insulation, powder-coated in white. The intake air and exhaust air connection can be on the left or right side. Maintenance-friendly access to all unit components through removable front panel. Delivery condition: Intake air and exhaust air side on the right.

**Heat exchanger**  
Large cross counterflow heat exchanger made of plastic, heat recovery efficiency up to 90 %.  
Type "ET" is equipped with highly efficient enthalpy heat exchanger for additional moisture recovery.

**Fans**  
Two low-noise high-performance centrifugal fans with energy-saving EC motors ensure the air supply and extraction.

**Ducts**  
Installation-friendly connection of intake, exhaust, extract and supply air through ducts with NW 160 mm using duct connectors (RVBD 160 K, accessories).

**Condensate connection**  
Condensate drain at the bottom; ball siphon included in delivery. On-site connection to drain pipe.

**Air filter**  
Clean outdoor air supply via ISO Coarse 65 % (G4) filter and 2nd filter stage via optional ISO ePM<sub>1</sub>, 50 % (F7) or activated carbon filter. Extract air side equipped with an ISO Coarse 65 % (G4) filter in front of the heat exchanger. Easy filter maintenance without opening the unit.

**Summer operation**  
Equipped with automatic bypass function and heat exchanger cover as standard.

**Heat exchanger anti-icing protection**  
The standard frost monitoring system automatically controls the supply air flow volume and the optionally installed electrical preheater (KWL-EVH 360/470 W, accessories).

**Control system**  
EasyControls 3.0 is the new, modern control system for all KWL compact units from Helios. The standard LAN interface allows the simple integration of the KWL unit in a network and the integration in Helios Cloud. The unit is optionally controlled via an external control element, on PC/laptop, tablet and Smartphone via the integrated web browser or on the move via the Cloud. See page 22 for func-

tionality. Helios easyControls 3.0 is prepared for:

- The control elements KWL-BE ECO and KWL-BE Touch (optional accessories)
- The humidity sensor integrated as standard and other optionally available external air quality sensors (KWL-CO<sub>2</sub> eC, -FTF eC, -VOC eC, accessories) enable automatic, demand-controlled ventilation.
- Connection to building control system via integrated Modbus interface or optional KNX module (KWL-KNX Connect, accessories).

**Electrical connection**  
Fixed connection via a mains connection cable 3 x 1.5 mm², approx. 2 m with wire end ferrules.

**Accessories – Functional description (see right for details)**  
KWL 470 W can be individually expanded with the following accessories:

**Control element ECO**

- Three ventilation profiles selectable via slide switch.
- Control voltage can be measured directly on the control element.
- LED for visual indication of operating statuses, e.g. filter replacement and faults.

**Control element Touch**  
Touch control element with graphic display and user-friendly menu navigation:

- Commissioning assistant.
- Selection of four ventilation profiles.
- Adjustment of an individual weekly programme.
- Adjustment of parameters for room sensors.
- Indication of e.g. filter replace-

ment, operating statuses and error messages.

- Different access authorisations and child lock.
- Other functions (see operating instructions).


**KNX/EIB module**  
For connecting the ventilation unit to the building control system via the KNX Connect module.

**Room sensors**  
Room sensors, which measure the mixed gas, CO<sub>2</sub> concentration or relative room air humidity, are available for automatic operation and optimal air exchange.

**Post-heating**  
Helios easyControls 3.0 can be used with an electric post-heating element (EHR with KWL-LTK, accessories). The autonomous operation of the warm water heating element can be controlled via an air temperature control (WHS HE, accessories) independently from Helios easyControls 3.0.

References	Page
<b>Helios easyControls 3.0</b>	
<b>The innovative KWL control concept</b>	22 f.
<b>Moisture recovery through enthalpy heat exchangers</b>	21

### Performance curves KWL 470 W

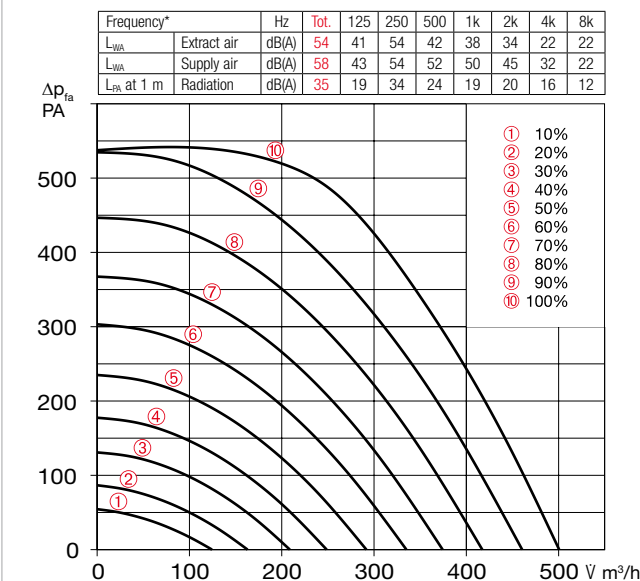

#### Slide switch control element

**KWL BE ECO** Ref. no. 20246

Three-step slide switch including operation indicator, for flush-mounted installation. Function see left.

Dim. mm (W x H x D) 80 x 80 x 37

#### Casing for surface installation

**KWL APG** Ref. no. 04270

Dim. mm (W x H x D) 83 x 83 x 41

#### Touch control element

**KWL BE Touch bl**

(black) Ref. no. 20244

**KWL BE Touch wh**

(white) Ref. no. 20245

With graphic display, for flush-mounted installation. Function see left. Connection of up to 6 pcs.

possible (additional power supply unit may be required). Can be integrated in common switch ranges with the dimensions mm (W x H x D) 55 x 55 x 35, Dim. with frame mm (W x H x D) 88 x 88 x 35

#### Casing for surface installation

**KWL APG Touch bl** No. 40178

**KWL APG Touch wh** No. 40177

Dim mm (W x H x D) 85 x 85 x 25

#### Control line cable

**KWL-SL eC 5m** Ref. no. 40179

**KWL-SL eC 10m** Ref. no. 40180

Control line cables in 5 or 10 meters, suitable for KWL-BE ECO / Touch as well as room sensor.

Technical data	With plastic heat exchanger					With enthalpy heat exchanger				
	Type	Ref. no.	Type	Ref. no.		Type	Ref. no.	Type	Ref. no.	
	<b>KWL 470 W</b>	40409	<b>KWL 470 W ET</b>	40410						
<b>Flow rate at level 1) 2)</b>	⑩ ⑧ ⑥ ④ ②		⑩ ⑧ ⑥ ④ ②							
Supply air/extract air V m³/h	500 417 335 249 163		500 420 338 253 171							
Power consumption fans 2xW 1)	85 53 31 16 8		87 54 31 16 8							
Voltage/Frequency	1~, 230 V, 50 Hz									
Rated current A – ventilation	1.4									
– preheating	6.3									
– max. total	1.4 (7.7 incl. preheater, accessories)									
Electric preheater kW	1.5 kW (accessories)									
Summer bypass	automatic (adjustable), with heat exchanger cover									
Wiring diagram no.	1433									
Temperature operating range	–20 °C to +40 °C									
Installation temperature	+5 °C to +40 °C (90% rel. humidity, non-condensing)									
Weight approx. kg	72					70				

1) At 0 Pa, performance levels adjustable. 2) Volume reduction by approx. 10% when using pollen filter.

#### KNX/EIB module

**KWL-KNX Connect** No. 20253

For integrating the ventilation unit in a KNX system. For switch cabinet installation (1 space unit required).

#### Room sensors

**KWL-CO2 eC** Ref. no. 20248

**KWL-FTF eC** Ref. no. 20249

**KWL-VOC eC** Ref. no. 20247

For measuring the CO<sub>2</sub>, mixed gas (VOC) concentration or relative room air humidity. Please note the maximum number of sensors, additional power supply unit may be required.

Dim. mm (W x H x D) 98 x 98 x 33

#### Electric preheater

**KWL-EVH 360/470 W** No. 07360

Electrical preheater for simple, plug-in unit installation. For preheating the intake air at very low outdoor temperatures (heat exchanger anti-icing protection). Mandatory for passive houses. Output: 1500 W.

#### Extension module

**KWL-EM eC** Ref. no. 40155

For controlling external post-heating elements.

Dim. mm (W x H x D) 210 x 210 x 100

#### Motion detector

**BWM** Ref. no. 08323

Motion detector for detecting the presence of persons in the room. Surface-mounted wall installation (cable entry at top or bottom) or installation in flush-mounted box Ø 55 mm (cable entry at back).

#### Electric post-heating element

For additional supply air heating.

**EHR-R 2.4/160** Ref. no. 09435

**Rectangular duct temp. sensor**

**KWL-LTK eC** (1 pc. req.) No. 40156

#### Warm water post-heating element

For additional supply air heating.

**WHR 160** Ref. no. 09481

**Rectangular duct temp. sensor**

**KWL-LTK eC** (2 pc. req.) No. 40156

**Hydraulic unit**

**WHSH HE 24 V (0-10V)** No. 08318

Alternative:

**Air temperature control**

**WHST 300 T38** Ref. no. 08817

#### ■ Circular duct connector

Connector with seal for unit connection to circular duct system with Ø 160 mm.

RVBD 160 K No. 03415

#### ■ Replacement air filters

– 2 pcs. ISO Coarse 65% (G4)

ELF-KWL 360/470/4/4 No. 07371

– 1 pc. ISO ePM, 50% (F7)

ELF-KWL 360/470/7 No. 07375

– 1 pc. Activated carbon filter

ELF-KWL 360/470 AK No. 08129

#### ■ Reference

Enthalpy heat exchanger

(accessories) for retrofitting:

KWL-ET 360/470 No. 07354

## KWL 500 W



KWL 500 W R with accessories  
(pollen filter, KWL-EVH 500 W)

### Efficiency class

**A**

KWL 500 W R/L and 500 W ET R/L



**Compact unit with heat recovery for the central supply and extract ventilation of residential buildings and apartments. Perfectly prepared for modern communication and operation with the new Helios easyControls 3.0 control system incl. integrated network connection. Equipped with EC fans for low energy consumption and highly efficient plastic or enthalpy heat exchangers for additional moisture recovery.**

### ■ Casing

Made of galvanised steel sheet, powder-coated in white, double-walled, with 12 mm heat and sound insulation on all sides. Installation-friendly and maintenance-friendly. All elements are easily accessible through removable front panels.

### ■ Heat exchanger

- ☐ Large cross counterflow heat exchanger made of plastic, heat recovery efficiency up to 90 %.
- ☐ Types "ET" are equipped with highly efficient enthalpy heat exchanger for additional moisture recovery.

### ■ Fans

Two low-noise high-performance centrifugal fans with energy-saving EC motors ensure the air supply and extraction.

### ■ Ducts

Installation-friendly connection of intake, exhaust, extract and supply air through ducts with NW 160 mm using duct connectors (RVBD 160 K, accessories).

### ■ Condensate connection

Condensate drain at the bottom; ball siphon included in delivery. On-site connection to drain pipe.

### ■ Air filter

Clean outdoor air supply via ISO Coarse 75 % (G4) filter and 2nd filter stage via optional ISO ePM<sub>1</sub> 50 % (F7) or activated carbon filter. Extract air side equipped with an ISO Coarse 75 % (G4) filter in front of the heat exchanger.

### ■ Summer operation

Equipped with automatic bypass function and heat exchanger cover as standard.

### ■ Heat exchanger anti-icing protection


The standard frost monitoring system automatically controls the supply air flow volume and the optionally installed electrical preheater (KWL-EVH 500 W, accessories).

### ■ Control system

EasyControls 3.0 is the new, modern control system for all KWL compact units from Helios. The standard LAN interface allows the simple integration of the KWL unit in a network and the integration in Helios Cloud. The unit is optionally controlled via an external control element, on PC/laptop, tablet and Smartphone via the integrated web browser or on the move via the Cloud. See page 22 for functionality. Helios easyControls 3.0 is prepared for:


- ☐ The control elements KWL-BE ECO and KWL-BE Touch (optional accessories)
- ☐ The humidity sensor integrated as standard and other optionally available external air quality sensors (KWL-CO<sub>2</sub> eC, -FTF eC,

## Dimensions KWL 500 W R

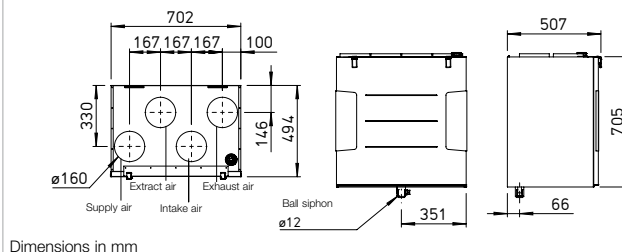

Dimensions in mm

## Dimensions KWL 500 W L

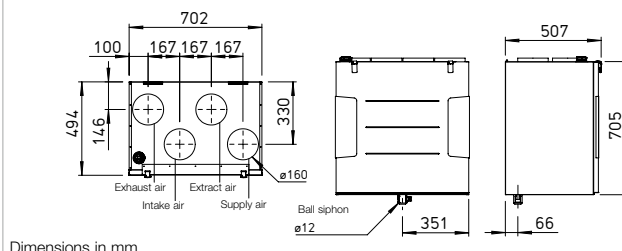

Dimensions in mm

-VOC eC, accessories) enable automatic, demand-controlled ventilation.

- ☐ Connection to building control system via integrated Modbus interface or optional KNX module (KWL-KNX Connect, accessories).

### ■ Electrical connection

Fixed connection via a mains connection cable 3 x 1.5 mm<sup>2</sup>, approx. 2 m with wire end ferrules.

- **Accessories – Functional description (see right for details)**  
KWL EC 500 W can be individually expanded with the following accessories:

### ☐ Control element ECO

- Three ventilation profiles selectable via slide switch.
- Control voltage can be measured directly on the control element.
- LED for visual indication of operating statuses, e.g. filter replacement and faults.

### ☐ Control element Touch

- Touch control element with graphic display and user-friendly menu navigation:
- Commissioning assistant.
- Selection of four ventilation profiles.
- Adjustment of an individual weekly programme.
- Adjustment of parameters for room sensors.
- Indication of e.g. filter replacement, operating statuses and error messages.
- Different access authorisations and child lock.
- Other functions (see operating instructions).

### ☐ KNX/EIB module

For connecting the ventilation unit to the building control system via the KNX Connect module.

### ☐ Room sensors


Room sensors, which measure the mixed gas, CO<sub>2</sub> concentration or relative room air humidity, are available for automatic operation and optimal air exchange.

### ☐ Post-heating

Helios easyControls 3.0 can be used with an electric post-heating element (EHR with KWL-LTK, accessories). The autonomous operation of the warm water heating element can be controlled via an air temperature control (WHS HE, accessories) independently from Helios easyControls 3.0.

■ References	Page
<b>Helios easyControls 3.0</b>	
<b>The innovative KWL control concept</b>	22 f.
<b>Moisture recovery through enthalpy heat exchangers</b>	21

### Performance curves KWL 500 W

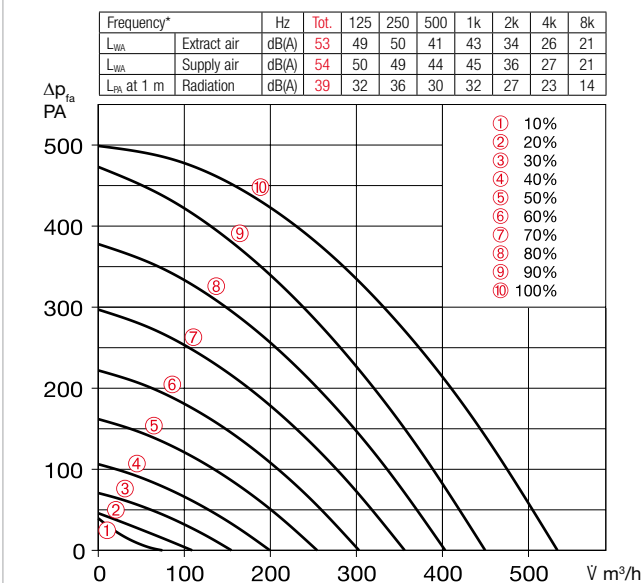

### Slide switch control element

**KWL BE ECO** Ref. no. 20246

Three-step slide switch including operation indicator, for flush-mounted installation. Function see left.

Dim. mm (W x H x D) 80 x 80 x 37

### Casing for surface installation

**KWL APG** Ref. no. 04270

Dim. mm (W x H x D) 83 x 83 x 41

### Touch control element

**KWL BE Touch bl**

(black) Ref. no. 20244

**KWL BE Touch wh**

(white) Ref. no. 20245

With graphic display, for flush-mounted installation. Function see left. Connection of up to 6 pcs.

possible (additional power supply unit may be required). Can be integrated in common switch ranges with the dimensions mm (W x H x D) 55 x 55 x 35, Dim. with frame mm (W x H x D) 88 x 88 x 35

### Casing for surface installation

**KWL APG Touch bl** No. 40178

**KWL APG Touch wh** No. 40177

Dim mm (W x H x D) 85 x 85 x 25

### Control line cable

**KWL-SL eC 5m** Ref. no. 40179

**KWL-SL eC 10m** Ref. no. 40180

Control line cables in 5 or 10 meters, suitable for KWL-BE ECO / Touch as well as room sensor.

Technical data	With plastic heat exchanger					With enthalpy heat exchanger				
	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
<b>Right-hand version</b>	<b>KWL 500 W R</b>	40053	<b>KWL 500 W ET R</b>	40055	<b>Left-hand version</b>	<b>KWL 500 W L</b>	40054	<b>KWL 500 W ET L</b>	40056	
<b>Flow rate at level 1<sup>2)</sup></b>										
Supply air/extract air V m³/h	490	403	303	200	109		506	387	295	190
Power consumption fans 2xW <sup>1)</sup>	150	82	41	16	7		152	83	41	17
Voltage/Frequency	1~, 230 V, 50 Hz									
Rated current A – ventilation	2.5									
– preheating	4.4									
– max. total	2.5 (6.9 incl. preheater, accessories)									
Electric preheater kW	1.0 kW (accessories)									
Summer bypass	automatic (adjustable), with heat exchanger cover									
Wiring diagram no.	1433									
Temperature operating range	–20 °C to +40 °C									
Installation temperature	+5 °C to +40 °C (90% rel. humidity, non-condensing)									
Weight approx. kg	58					66				

<sup>1)</sup> At 0 Pa, performance levels adjustable. <sup>2)</sup> Volume reduction by approx. 10% when using pollen filter.

<sup>3)</sup> AK = Activated carbon filter <sup>4)</sup> For a duct diameter of 160 mm.

<sup>5)</sup> For a duct diameter of 180 mm.

### KNX/EIB module

**KWL-KNX Connect** No. 20253

For integrating the ventilation unit in a KNX system. For switch cabinet installation (1 space unit required).

### Room sensors

**KWL-CO2 eC** Ref. no. 20248

**KWL-FTF eC** Ref. no. 20249

**KWL-VOC eC** Ref. no. 20247

For measuring the CO<sub>2</sub>, mixed gas (VOC) concentration or relative room air humidity. Please note the maximum number of sensors, additional power supply unit may be required.

Dim. mm (W x H x D) 98 x 98 x 33

### Electric preheater

**KWL-EVH 500 W** No. 04262

Electrical preheater for simple, plug-in unit installation. For preheating the intake air at very low outdoor temperatures (heat exchanger anti-icing protection). Mandatory for passive houses. Output: 1000 W.

### Extension module

**KWL-EM eC** Ref. no. 40155

For controlling external post-heating elements.

Dim. mm (W x H x D) 210 x 210 x 100

### Motion detector

**BWM** Ref. no. 08323

Motion detector for detecting the presence of persons in the room. Surface-mounted wall installation (cable entry at top or bottom) or installation in flush-mounted box Ø 55 mm (cable entry at back).

### Electric post-heating element

For additional supply air heating.

**EHR-R 2.4/160** Ref. no. 09435

**Rectangular duct temp. sensor**

**KWL-LTK eC** (1 pc. req.) No. 40156

### Warm water post-heating element

For additional supply air heating.

**WHR 160** Ref. no. 09481

**Rectangular duct temp. sensor**

**KWL-LTK eC** (2 pc. req.) No. 40156

**Hydraulic unit**

**WHSR HE 24 V (0-10V)** No. 08318

Alternative:

### Air temperature control

**WHST 300 T38** Ref. no. 08817

### Replacement air filters

– 2 pcs. **ISO Coarse 75% (G4)**

ELF-KWL 500/4/4 No. 00039

– 1 pc. **ISO ePM<sub>1</sub>, 50% (F7)**

ELF-KWL 500/7 No. 00042

– 1 pc. **ISO ePM<sub>2.5</sub> 60% (AK)<sup>3)</sup>**

ELF-KWL 500 AK No. 04199

### Reference

**Enthalpy heat exchanger (accessories) for retrofitting:**

**KWL-ET 500** No. 00897

### Circular duct connector

**Connector with seal for unit connection to circular duct system.**

RVBD 160 K<sup>4)</sup> No. 03415

RVBD 180/160<sup>5)</sup> No. 09589

### Other accessories

**Page**

KWL peripherals 70 ff.

– Ground heat exchanger 94 ff.

– Insulated duct system 84 f.

– Air distribution systems 86 ff.

Heating element, control, vent-


ilation grilles, ducts, roof outlets,

extract air elements, design

ventilation valves

**Helios standard range**

## KWL 890 W

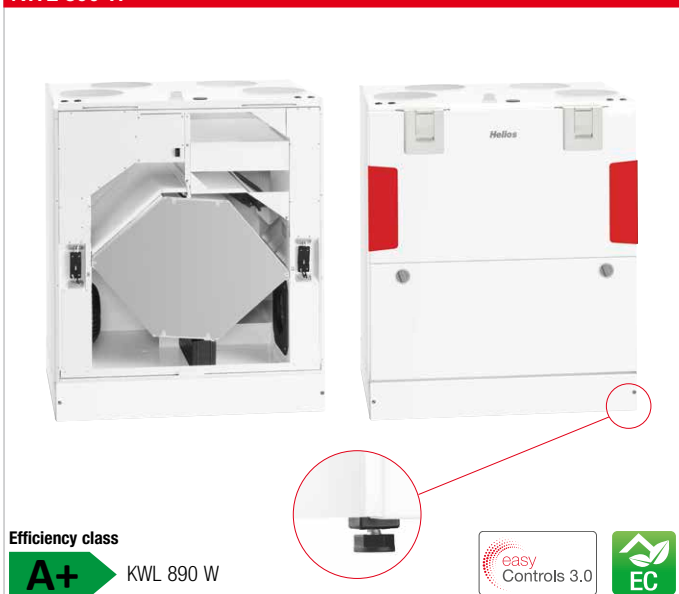

**Compact unit with heat recovery for the central supply and extract ventilation of residential buildings, commercial units and practices. Perfectly prepared for modern communication and operation with the new Helios easyControls 3.0 control system incl. integrated network connection. Equipped with EC fans for low energy consumption and highly efficient aluminium or enthalpy heat exchangers for additional moisture recovery.**

### ■ Casing

Made of galvanised steel sheet, powder-coated in white, double-walled, with heat and sound insulation on all sides. Installation-friendly and maintenance-friendly. All elements are easily accessible through removable front panels. Adjustable feet for balancing.

### ■ Heat exchanger

- ☐ Large cross counterflow heat exchanger made of aluminium, heat recovery efficiency up to 86 %.
- ☐ Type "ET" is equipped with highly efficient enthalpy heat exchanger for additional moisture recovery.

### ■ Fans

Two low-noise high-performance centrifugal fans with energy-saving EC motors of the latest generation ensure the air supply and extraction.

### ■ Ducts

Installation-friendly connection of intake, exhaust, extract and supply air through ducts with NW 250 mm. Direct connection

of e.g. Aluflex pipe by means of an external double nipple joint.

### ■ Condensate connection

Double condensate drain at the bottom; ball siphons included in delivery. On-site connection to drain pipe.

### ■ Air filter

Clean outdoor air supply via ISO Coarse 75 % (G4) filter and 2nd filter stage ISO ePM<sub>1</sub> 50 % (F7). Extract air side equipped with an ISO Coarse 75 % (G4) filter in front of the heat exchanger. Easy filter maintenance.

### ■ Summer operation

Equipped with automatic bypass function and heat exchanger cover as standard.

### ■ Heat exchanger anti-frost protection


The standard frost monitoring system automatically controls the supply air flow volume and the optionally internal electrical postheater (KWL-ENH 890 W, accessories).

### ■ Control system


EasyControls 3.0 is the new, modern control system for all KWL compact units from Helios. The standard LAN interface allows the simple integration of the KWL unit in a network and the integration in Helios Cloud. The unit is optionally controlled via an external control element, on PC/laptop, tablet and Smartphone via the integrated web browser or on the move via the Cloud. Helios easyControls 3.0 is prepared for:

- ☐ The control elements KWL-BE ECO and KWL-BE Touch (optional accessories)

## Dimensions KWL 890 W R

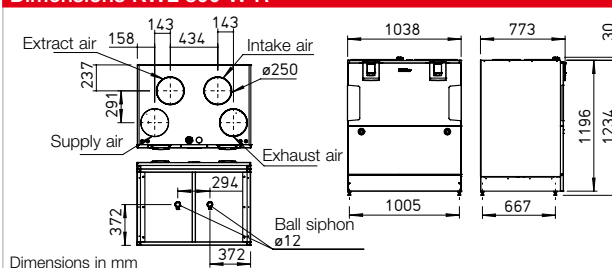

## Dimensions KWL 890 W L

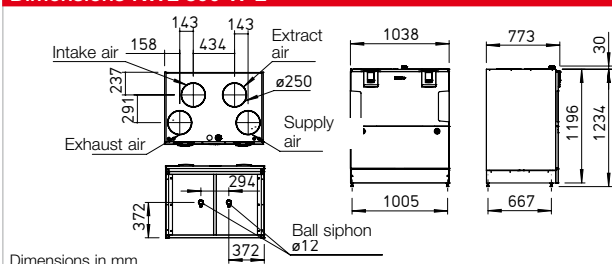

- ☐ **The humidity- and CO<sub>2</sub>-Sensor integrated as standard** and other optionally available external air quality sensors (KWL-CO<sub>2</sub> eC, -FTF eC, -VOC eC, accessories) enable automatic, demand-controlled ventilation.

- ☐ Connection to building control system via integrated Modbus interface or optional KNX module (KWL-KNX Connect, accessories).

### ■ Electrical connection

Fixed connection via a mains connection cable 3 x 1.5 mm<sup>2</sup>, approx. 2 m with wire end ferrules.

### ■ Accessories – Functional description (see right for details)

KWL 890 W can be individually expanded with the following accessories:

- ☐ **Control element ECO**
  - Three ventilation profiles selectable via slide switch.
  - Control voltage can be measured directly on the control element.
  - LED for visual indication of operating statuses, e.g. filter replacement and faults.

### ☐ Control element Touch

Touch control element with graphic display and user-friendly menu navigation:

- Commissioning assistant.
- Selection of four ventilation profiles.
- Adjustment of an individual weekly programme.
- Adjustment of parameters for room sensors.
- Indication of e.g. filter replacement, operating statuses and error messages.
- Different access authorisations and child lock.

- Other functions (see operating instructions).

### ☐ KNX/EIB module

For connecting the ventilation unit to the building control system via the KNX Connect module.

### ☐ Room sensors


Room sensors, which measure the mixed gas, CO<sub>2</sub> concentration or relative room air humidity, are available for automatic operation and optimal air exchange.

### ☐ External post-heating

Helios easyControls 3.0 can be used with an electric post-heating element (EHR with KWL-LTK, accessories). The autonomous operation of the warm water heating element can be controlled via an air temperature control (WHS HE, accessories) independently from Helios easyControls 3.0.

References	Page
<b>Helios easyControls 3.0</b>	
<b>The innovative KWL control concept</b>	22 f.
<b>Moisture recovery through enthalpy heat exchangers</b>	21

### Performance curves KWL 890 W

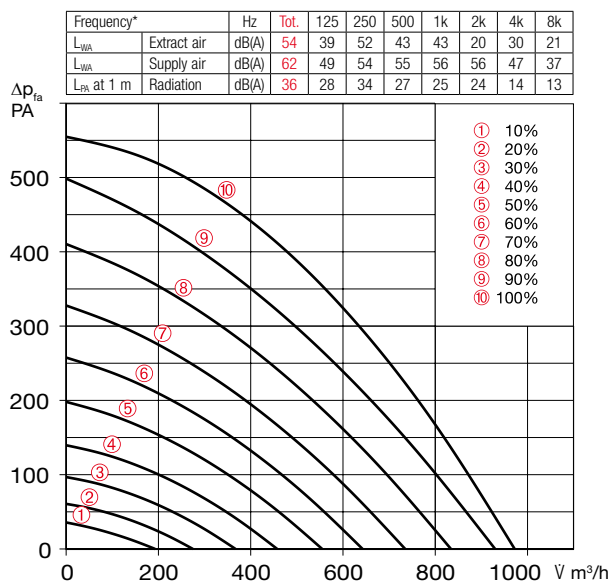

\*Sound information relate to Vref. according to ERP data sheet.

#### Slide switch control element

**KWL BE ECO** Ref. no. 20246

Three-step slide switch including operation indicator, for flush-mounted installation. Function see left.

Dim. mm (W x H x D) 80 x 80 x 37

#### Casing for surface installation

**KWL APG** Ref. no. 04270

Dim. mm (W x H x D) 83 x 83 x 41

#### Touch control element

**KWL BE Touch bl**

(black) Ref. no. 20244

**KWL BE Touch wh**

(white) Ref. no. 20245

With graphic display, for flush-mounted installation. Function see left. Connection of up to 6 pcs.

possible (additional power supply unit may be required). Can be integrated in common switch ranges with the dimensions mm (W x H x D) 55 x 55 x 35, Dim. with frame mm (W x H x D) 88 x 88 x 35

#### Casing for surface installation

**KWL APG Touch bl** No. 40178

**KWL APG Touch wh** No. 40177

Dim mm (W x H x D) 85 x 85 x 25

#### Control line cable

**KWL-SL eC 5m** Ref. no. 40179

**KWL-SL eC 10m** Ref. no. 40180

Control line cables in 5 or 10 meters, suitable for KWL-BE ECO / Touch as well as room sensor.

Technical data	With aluminium heat exchanger					With enthalpy heat exchanger				
	Type	Ref. no.	Type	Ref. no.		Type	Ref. no.	Type	Ref. no.	
	<b>KWL 890 W L</b>	40721	<b>KWL 890 W ET L</b>	40723		<b>KWL 890 W ET L</b>	40723	<b>KWL 890 W ET R</b>	40724	
	<b>KWL 890 W R</b>	40722	<b>KWL 890 W ET R</b>	40724						
<b>Flow rate at level 1)</b>	⑩ ⑧ ⑥ ④ ②		⑩ ⑧ ⑥ ④ ②							
Supply air/extract air V m³/h	972 834 735 555 275		996 860 668 480 295							
Power consumption fans 2xW 1)	161 105 53 23 8		159 106 54 24 8							
Voltage/Frequency	1~, 230 V, 50 Hz									
Rated current A – ventilation	1.4									
– postheating	12.1									
– max. total	1.4 (13.6 incl. postheater, accessories)									
Electric postheater kW	3.0 kW (accessories)									
Summer bypass	automatic (adjustable), with heat exchanger cover									
Wiring diagram no.	1433									
Temperature operating range	–20 °C to +40 °C									
Installation temperature	+5 °C to +40 °C (90 % rel. humidity, non-condensing)									
Weight approx. kg	179					174				

1) At 0 Pa, performance levels adjustable.

#### KNX/EIB module

**KWL-KNX Connect** No. 20253

For integrating the ventilation unit in a KNX system. For switch cabinet installation (1 space unit required).

#### Room sensors

**KWL-CO2 eC** Ref. no. 20248

**KWL-FTF eC** Ref. no. 20249

**KWL-VOC eC** Ref. no. 20247

For measuring the CO<sub>2</sub>, mixed gas (VOC) concentration or relative room air humidity. Please note the maximum number of sensors, additional power supply unit may be required.

Dim. mm (W x H x D) 98 x 98 x 33

#### Electric postheater, internal

**KWL-ENH 890 W** No. 40728

Electrical postheater for simple, plug-in unit installation. For postheating the supply air at very low outdoor temperatures (heat exchanger anti-icing protection). Mandatory for passive houses. Output: 3000 W.

#### Extension module

**KWL-EM eC** Ref. no. 40155

For controlling external post-heating elements.

Dim. mm (W x H x D) 210 x 210 x 100

#### Motion detector

**BWM** Ref. no. 08323

Motion detector for detecting the presence of persons in the room. Surface-mounted wall installation (cable entry at top or bottom) or installation in flush-mounted box Ø 55 mm (cable entry at back).

#### Electric postheater, external

For additional supply air heating.

**EHR-R 6/250** Ref. no. 05296

#### Rectangular duct temp. sensor

**KWL-LTK eC** (1 pc. req.) No. 40156

#### Warm water post-heating element

For additional supply air heating.

**WHR 250** Ref. no. 09483

#### Rectangular duct temp. sensor

**KWL-LTK eC** (2 pc. req.) No. 40156

#### Hydraulic unit

**WHS HE 24 V (0-10 V)** No. 08318

Alternative:

#### Air temperature control

**WHST 300 T38** Ref. no. 08817

#### Other accessories Page

KWL peripherals	70 ff.
– Ground heat exchanger	94 ff.
– Insulated duct system	84 f.
– Air distribution systems	86 ff.

Heating element, control, ventilation grilles, ducts, roof outlets, extract air elements, design ventilation valves

**Helios standard range**

#### Replacement air filters

**– Filter Set (G4 + F7)**

ELF-KWL 890/4/4/7 No. 40729

#### Reference

**Enthalpy heat exchanger**

**(accessories) for retrofitting:**

KWL-ET 890 No. 40730

## KWL 220 D



### Efficiency class

- A+** KWL 220 D R/L with additional room sensor
- A** KWL 220 D R/L



**Ultra-flat ceiling units with heat recovery for the central supply and extract ventilation of apartments and small single family houses.** Certified according to the passive house standard. Equipped with Helios easyControls 3.0, the innovative control concept for simple network connection and web browser control. Units come with highly efficient plastic heat exchangers and energy-efficient EC motors.

### ■ Casing

Made of galvanised steel sheet, inner and front panels powder-coated in white, double-walled, with 20 mm heat and sound insulation on all sides. Installation-friendly and maintenance-friendly. All elements are easily accessible through removeable side panels.

### ■ Heat exchanger

Large cross counterflow heat exchanger made of plastic, heat recovery efficiency of up to 90 %.

### ■ Fans

Two low-noise high-performance centrifugal fans with energy-saving EC motors ensure the air supply and extraction. Maintenance-free, easily removeable for cleaning, if required.

### ■ Ducts

Installation-friendly connection of intake, exhaust, extract and supply air through ducts with NW 125 mm using duct connectors (RVBD 125 K, accessories).

### ■ Condensate connection

Condensate drain at the bottom; ball siphon included in delivery. On-site connection to drain pipe.

### ■ Air filter

Clean outdoor air supply via ISO Coarse 75 % (G4) filter and 2nd filter stage via optional ISO ePM<sub>1</sub> 50 % (F7) or activated carbon filter. Extract air side equipped with an ISO Coarse 75 % (G4) filter in front of the heat exchanger.

### ■ Summer operation

Equipped with automatic bypass function and heat exchanger cover as standard.

### ■ Heat exchanger anti-icing protection


The standard frost monitoring system automatically controls the supply air flow volume and the optionally installed electrical preheater (KWL-EVH 220 D, accessories).

### ■ Control system


EasyControls 3.0 is the new, modern control system for all KWL compact units from Helios. The standard LAN interface allows the simple integration of the KWL unit in a network and the integration in Helios Cloud. The unit is optionally controlled via an external control element, on PC/laptop, tablet and Smartphone via the integrated web browser or on the move via the Cloud. See page 22 f. Helios easyControls 3.0 is prepared for:

- The control elements KWL-BE ECO and KWL-BE Touch (optional accessories)
- The humidity sensor integrated as standard and other optionally available external air quality

## Dimensions KWL 220 D R

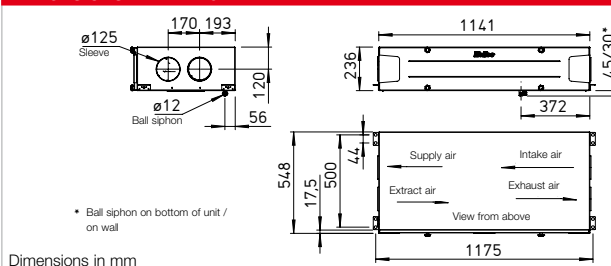

## Dimensions KWL 220 D L

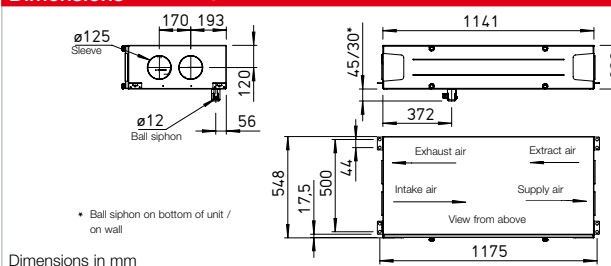

sensors (KWL-CO<sub>2</sub> eC, -FTF eC, -VOC eC, accessories) enable automatic, demand-controlled ventilation.

- Connection to building control system via integrated Modbus interface or optional KNX module (KWL-KNX Connect, accessories).

### ■ Electrical connection

Fixed connection via a mains connection cable 3 x 1.5 mm², approx. 2 m with wire end ferrules.

### ■ Accessories – Functional description (see right for details)

KWL EC 220 D can be individually expanded with the following accessories:

- **Control element ECO**
  - Three ventilation profiles selectable via slide switch.
  - Control voltage can be measured directly on the control element.
  - LED for visual indication of operating statuses, e.g. filter replacement and faults.
- **Control element Touch**
  - Touch control element with graphic display and user-friendly menu navigation:
    - Commissioning assistant.
    - Selection of four ventilation profiles.
    - Adjustment of an individual weekly programme.
    - Adjustment of parameters for room sensors.
    - Indication of e.g. filter replacement, operating statuses and error messages.
    - Different access authorisations and child lock.
    - Other functions (see operating instructions).

### □ KNX/EIB module

For connecting the ventilation unit to the building control system via the KNX Connect module.


### □ Room sensors

Room sensors, which measure the mixed gas, CO<sub>2</sub> concentration or relative room air humidity, are available for automatic operation and optimal air exchange.

### □ Post-heating

Helios easyControls 3.0 can be used with an electric post-heating element (EHR with KWL-LTK, accessories). The autonomous operation of the warm water heating element can be controlled via an air temperature control (WHS HE, accessories) independently from Helios easyControls 3.0.

References	Page
Helios easyControls 3.0 The innovative KWL control concept	22 f.

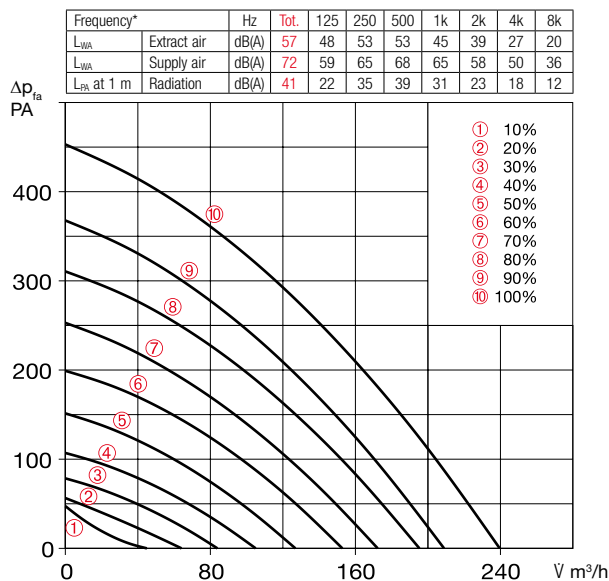**Performance curves KWL 220 D**

**Slide switch control element**
**KWL BE ECO** Ref. no. 20246

Three-step slide switch including operation indicator, for flush-mounted installation. Function see left.

Dim. mm (W x H x D) 80 x 80 x 37

**Casing for surface installation**
**KWL APG** Ref. no. 04270

Dim. mm (W x H x D) 83 x 83 x 41

**Touch control element**
**KWL BE Touch bl**

(black) Ref. no. 20244

**KWL BE Touch wh**

(white) Ref. no. 20245

With graphic display, for flush-mounted installation. Function see left. Connection of up to 6 pcs.

possible (additional power supply unit may be required). Can be integrated in common switch ranges with the dimensions mm (W x H x D) 55 x 55 x 35, Dim. with frame mm (W x H x D) 88 x 88 x 35

**Casing for surface installation**

**KWL APG Touch bl** No. 40178

**KWL APG Touch wh** No. 40177

Dim mm (W x H x D) 85 x 85 x 25

**Control line cable**
**KWL-SL eC 5m** Ref. no. 40179

**KWL-SL eC 10m** Ref. no. 40180

Control line cables in 5 or 10 meters, suitable for KWL-BE ECO / Touch as well as room sensor.

Technical data	KWL 220 D R/L	For ceiling installation
<b>Right-hand version</b>	<b>KWL 220 D R</b>	Ref. no. 40057
<b>Left-hand version</b>	<b>KWL 220 D L</b>	Ref. no. 40058
<b>Flow rate at level 1) 2)</b>	⑩	⑥
Supply air/extract air V m³/h	239	195
Power consumption fans 2xW 1)	47	30
Voltage/Frequency	1~, 230 V, 50 Hz	
Rated current A – ventilation	0.8	
– preheating	4.4	
– max. total	0.8 (5.2 incl. preheater, accessories)	
Electric preheater kW	1.0 kW (accessories)	
Summer bypass	automatic (adjustable), with heat exchanger cover	
Wiring diagram no.	1433	
Temperature operating range	– 20 °C to + 40 °C	
Installation temperature	+ 5 °C to + 40 °C (90% rel. humidity, non-condensing)	
Weight approx. kg	47	

1) At 0 Pa, performance levels adjustable. 2) Volume reduction by approx. 10% when using pollen filter.

3) AK = Activated carbon filter

**KNX/EIB module**
**KWL-KNX Connect** No. 20253

For integrating the ventilation unit in a KNX system. For switch cabinet installation (1 space unit required).

**Room sensors**
**KWL-CO2 eC** Ref. no. 20248

**KWL-FTF eC** Ref. no. 20249

**KWL-VOC eC** Ref. no. 20247

For measuring the CO<sub>2</sub>, mixed gas (VOC) concentration or relative room air humidity. Please note the maximum number of sensors, additional power supply unit may be required.

Dim. mm (W x H x D) 98 x 98 x 33

**Electric preheater**
**KWL-EVH 220 D** No. 09636

Electrical preheater for simple, plug-in unit installation. For preheating the intake air at very low outdoor temperatures (heat exchanger anti-icing protection). Mandatory for passive houses. Output: 1000 W.

**Extension module**
**KWL-EM eC** Ref. no. 40155

For controlling external post-heating elements.

Dim. mm (W x H x D) 210 x 210 x 100

**Motion detector**
**BWM** Ref. no. 08323

Motion detector for detecting the presence of persons in the room. Surface-mounted wall installation (cable entry at top or bottom) or installation in flush-mounted box Ø 55 mm (cable entry at back).

**Electric post-heating element**

For additional supply air heating.

**EHR-R 1.2/125** Ref. no. 09433

**Rectangular duct temp. sensor**
**KWL-LTK eC** (1 pc. req.) No. 40156

**Warm water post-heating element**

For additional supply air heating.

**WHR 125** Ref. no. 09480

**Rectangular duct temp. sensor**
**KWL-LTK eC** (2 pc. req.) No. 40156

**Hydraulic unit**
**WHSH HE 24 V (0-10V)** No. 08318

Alternative:

**Air temperature control**
**WHST 300 T38** Ref. no. 08817



**Replacement air filters**
**– 2 pcs. ISO Coarse 75% (G4)**
**ELF-KWL 220 D/4/4** No. 09638

**– 1 pc. ISO ePM<sub>1</sub> 50% (F7)**
**ELF-KWL 220 D/7** No. 09639

**– 1 pc. ISO ePM<sub>2.5</sub> 60% (AK)<sup>3)</sup>**
**ELF-KWL 220 AK** No. 03050

**Circular duct connector**

**Connector with seal for unit connection to circular duct system with Ø 125 mm.**

**RVBD 125 K** No. 03414


Other accessories	Page
KWL peripherals	70 ff.
– Ground heat exchanger	94 ff.
– Insulated duct system	84 f.
– Air distribution systems	86 ff.
Heating element, control, ventilation grilles, ducts, roof outlets, extract air elements, design ventilation valves	
<b>Helios standard range</b>	

## KWL 340 D



### Efficiency class

- A+** KWL 340 D R/L with additional room sensor
- A** KWL 340 D R/L



Ultra-flat ceiling units with heat recovery for the central supply and extract ventilation of apartments and small single family houses. Equipped with Helios easyControls 3.0, the innovative control concept for simple network connection and web browser control. Units come with highly efficient plastic heat exchangers and energy-efficient EC motors.

### ■ Casing

Made of galvanised steel sheet, inner and front panels powder-coated in white, double-walled, with 20 mm heat and sound insulation on all sides. Installation-friendly and maintenance-friendly. All elements are easily accessible through removeable side panels.

### ■ Heat exchanger

Large cross counterflow heat exchanger made of plastic, heat recovery efficiency of up to 90 %.

### ■ Fans

Two low-noise high-performance centrifugal fans with energy-saving EC motors ensure the air supply and extraction. Maintenance-free, easily removeable for cleaning, if required.

### ■ Ducts

Installation-friendly connection of intake, exhaust, extract and supply air through ducts with NW 160 mm using duct connectors (RVBD 160 K, accessories).

### ■ Condensate connection

Condensate drain at the bottom; ball siphon included in delivery. On-site connection to drain pipe.

### ■ Air filter

Clean outdoor air supply via ISO Coarse 75 % (G4) filter and 2nd filter stage via optional ISO ePM<sub>1</sub> 50 % (F7) or activated carbon filter. Extract air side equipped with an ISO Coarse 75 % (G4) filter in front of the heat exchanger.

### ■ Summer operation

Equipped with automatic bypass function and heat exchanger cover as standard.

### ■ Heat exchanger anti-icing protection


The standard frost monitoring system automatically controls the supply air flow volume and the optionally installed electrical preheater (KWL-EVH 340 D, accessories).

### ■ Control system


EasyControls 3.0 is the new, modern control system for all KWL compact units from Helios. The standard LAN interface allows the simple integration of the KWL unit in a network and the integration in Helios Cloud. The unit is optionally controlled via an external control element, on PC/laptop, tablet and Smartphone via the integrated web browser or on the move via the Cloud. See page 22 f. Helios easyControls 3.0 is prepared for:

- The control elements KWL-BE ECO and KWL-BE Touch (optional accessories)
- The humidity sensor integrated as standard and other optionally available external air quality sensors (KWL-CO<sub>2</sub> eC, -FTF eC, -VOC eC, accessories) enable automatic, demand-controlled ventilation.

## Dimensions KWL 340 D R

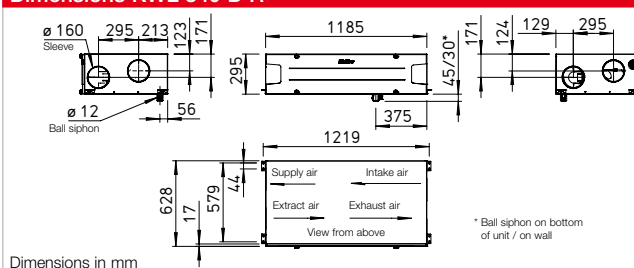

## Dimensions KWL 340 D L

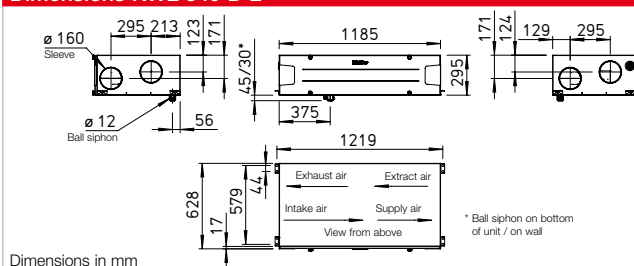

- Connection to building control system via integrated Modbus interface or optional KNX module (KWL-KNX Connect, accessories).

### ■ Electrical connection

Fixed connection via a mains connection cable 3 x 1.5 mm², approx. 2 m with wire end ferrules.

- **Accessories – Functional description (see right for details)**  
KWL EC 340 D can be individually expanded with the following accessories:

### □ Control element ECO

- Three ventilation profiles selectable via slide switch.
- Control voltage can be measured directly on the control element.
- LED for visual indication of operating statuses, e.g. filter replacement and faults.

### □ Control element Touch

- Touch control element with graphic display and user-friendly menu navigation:
- Commissioning assistant.
- Selection of four ventilation profiles.
- Adjustment of an individual weekly programme.
- Adjustment of parameters for room sensors.
- Indication of e.g. filter replacement, operating statuses and error messages.
- Different access authorisations and child lock.
- Other functions (see operating instructions).

### □ KNX/EIB module

For connecting the ventilation unit to the building control system via the KNX Connect module.


### □ Room sensors

Room sensors, which measure the mixed gas, CO<sub>2</sub> concentration or relative room air humidity, are available for automatic operation and optimal air exchange.

### □ Post-heating

Helios easyControls 3.0 can be used with an electric post-heating element (EHR with KWL-LTK, accessories). The autonomous operation of the warm water heating element can be controlled via an air temperature control (WHS HE, accessories) independently from Helios easyControls 3.0.

References	Page
Helios easyControls 3.0 The innovative KWL control concept	22 f.

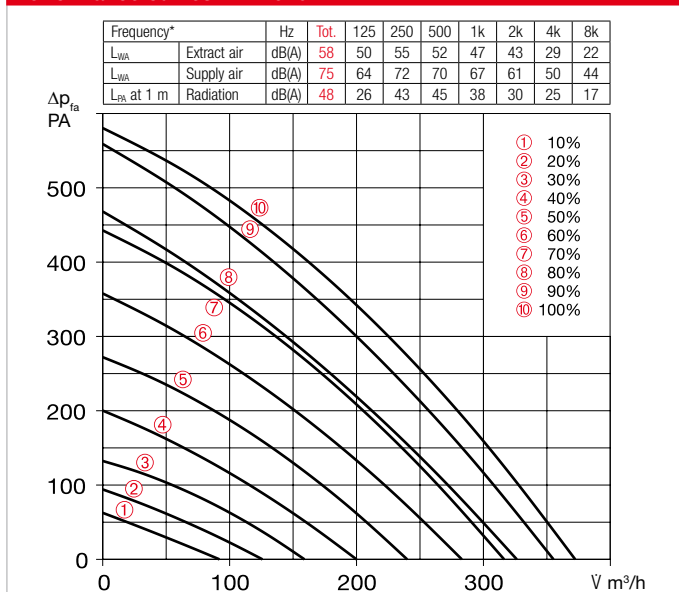**Performance curves KWL 340 D**

**Slide switch control element**
**KWL BE ECO** Ref. no. 20246

Three-step slide switch including operation indicator, for flush-mounted installation. Function see left.

Dim. mm (W x H x D) 80 x 80 x 37

**Casing for surface installation**
**KWL APG** Ref. no. 04270

Dim. mm (W x H x D) 83 x 83 x 41

**Touch control element**
**KWL BE Touch bl**

(black) Ref. no. 20244

**KWL BE Touch wh**

(white) Ref. no. 20245

With graphic display, for flush-mounted installation. Function see left. Connection of up to 6 pcs.

possible (additional power supply unit may be required). Can be integrated in common switch ranges with the dimensions mm (W x H x D) 55 x 55 x 35, Dim. with frame mm (W x H x D) 88 x 88 x 35

**Casing for surface installation**
**KWL APG Touch bl** No. 40178

**KWL APG Touch wh** No. 40177

Dim mm (W x H x D) 85 x 85 x 25

**Control line cable**
**KWL-SL eC 5m** Ref. no. 40179

**KWL-SL eC 10m** Ref. no. 40180

Control line cables in 5 or 10 meters, suitable for KWL-BE ECO / Touch as well as room sensor.

Technical data	KWL 340 D R/L		For ceiling installation		
Right-hand version	KWL 340 D R		Ref. no. 40059		
Left-hand version	KWL 340 D L		Ref. no. 40060		
Flow rate at level <sup>1) 2)</sup>	⑩	⑧	⑥	④	②
Supply air/extract air V̇ m³/h	372	326	283	200	126
Power consumption fans 2xW <sup>1)</sup>	79	56	40	20	10
Voltage/Frequency	1~, 230 V, 50 Hz				
Rated current A – ventilation	1.2				
– preheating	5.6				
– max. total	1.2 (6.8 incl. preheater, accessories)				
Electric preheater kW	1.3 kW (accessories)				
Summer bypass	automatic (adjustable), with heat exchanger cover				
Wiring diagram no.	1433				
Temperature operating range	–20 °C to +40 °C				
Installation temperature	+5 °C to +40 °C (90% rel. humidity, non-condensing)				
Weight approx. kg	77				

1) At 0 Pa, performance levels adjustable. 2) Volume reduction by approx. 10% when using pollen filter.

3) AK = Activated carbon filter

**KNX/EIB module**
**KWL-KNX Connect** No. 20253

For integrating the ventilation unit in a KNX system. For switch cabinet installation (1 space unit required).

**Room sensors**
**KWL-CO2 eC** Ref. no. 20248

**KWL-FTF eC** Ref. no. 20249

**KWL-VOC eC** Ref. no. 20247

For measuring the CO<sub>2</sub>, mixed gas (VOC) concentration or relative room air humidity. Please note the maximum number of sensors, additional power supply unit may be required.

Dim. mm (W x H x D) 98 x 98 x 33

**Electric preheater**
**KWL-EVH 340 D** No. 04241

Electrical preheater for simple, plug-in unit installation. For preheating the intake air at very low outdoor temperatures (heat exchanger anti-icing protection). Mandatory for passive houses. Output: 1280 W.

**Extension module**
**KWL-EM eC** Ref. no. 40155

For controlling external post-heating elements.

Dim. mm (W x H x D) 210 x 210 x 100

**Motion detector**
**BWM** Ref. no. 08323

Motion detector for detecting the presence of persons in the room. Surface-mounted wall installation (cable entry at top or bottom) or installation in flush-mounted box Ø 55 mm (cable entry at back).

**Electric post-heating element**

For additional supply air heating.

**EHR-R 2.4/160** Ref. no. 09435

**Rectangular duct temp. sensor**
**KWL-LTK eC** (1 pc. req.) No. 40156

**Warm water post-heating element**

For additional supply air heating.

**WHR 160** Ref. no. 09481

**Rectangular duct temp. sensor**
**KWL-LTK eC** (2 pc. req.) No. 40156

**Hydraulic unit**
**WHSH HE 24 V (0-10V)** No. 08318

Alternative:

**Air temperature control**
**WHST 300 T38** Ref. no. 08817

**Replacement air filters**

– 2 pcs. **ISO Coarse 75% (G4)**

ELF-KWL 340 D/4/4 No. 04239

– 1 pc. **ISO ePM<sub>1</sub> 50% (F7)**

ELF-KWL 340 D/7 No. 04240


– 1 pc. **ISO ePM<sub>2.5</sub> 60% (AK)**<sup>3)</sup>

ELF-KWL 340 AK No. 03051

**Circular duct connector**

**Connector with seal for unit connection to circular duct system with Ø 160 mm.**

RVBD 160 K No. 03415



**Other accessories**

KWL peripherals 70 ff.

– Ground heat exchanger 94 ff.

– Insulated duct system 84 f.

– Air distribution systems 86 ff.


Heating element, control, ventilation grilles, ducts, roof outlets, extract air elements, design ventilation valves

**Helios standard range**

## KWL EC 700 D



## Dimensions KWL EC 700 D

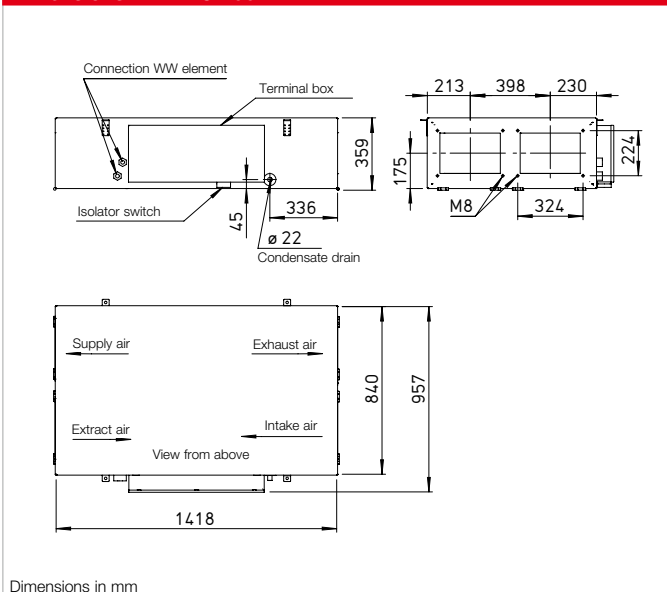

**Ultra-flat ventilation units with heat recovery for compact and space-saving ceiling installation.**

With a wide range of residential, commercial and industrial applications. Independently certified hygiene properties and energy efficiency according to VDI 6022 and the passive house standard. Unit construction and unit components fulfil the general hygiene requirements according to VDI 6022.

Available in various comfort and equipment variants.

### ■ Casing

Double-walled, made of galvanised steel sheet, with 30 mm heat and sound insulation on all sides. The inspection openings for filter replacement are accessible at the bottom of the unit without tools.

Ceiling installation via vibration-damping fastening elements included in the delivery.

### ■ Heat exchanger

Large cross counterflow heat exchanger made of aluminium with heat recovery efficiency of up to 90 %. Dismantling possible in just a few simple steps.

### ■ Fans

Two low-noise high-performance EC fans with backward-curved impellers guarantee maximum energy efficiency. The special control technology enables constant volume control or constant pressure control.

### ■ Ducts

Installation-friendly connection of intake, exhaust, extract and supply air through pipe or duct system NW 250 mm.

### ■ Condensate connection

A separate condensate tray below the heat exchanger facilitates maintenance work on the unit. Drain connectors on the side next to the terminal box. Ball siphon included in delivery. On-site connection to drain pipe.

### ■ Air filter

Standard equipment: Clean intake air supply via ISO ePM<sub>1</sub> 55% filter (F7). The heat exchanger requires a ISO ePM<sub>10</sub> 50% filter (M5) on the extract air side. All filters are pressure-controlled and exchangeable in just a few simple steps.

### ■ Summer operation

Standard equipment with automatic bypass function for maximum comfort.

### ■ Heat exchanger anti-icing protection

An electric preheating element heats the intake air at very low outdoor temperatures. Thus, it prevents the heat exchanger from icing up and guarantees its safe functioning and optimal heat recovery during the entire heating period.

### ■ Power control

The comfort control element with graphic display and user-friendly menu navigation, which is included in the delivery, enables the following functions:

- ☐ Control directly via touchscreen.
- ☐ Freely definable operating points within the entire range of the performance curve.
- ☐ Selection between constant volume control or constant pressure control.
- ☐ Demand-oriented ventilation using CO<sub>2</sub>, VOC (mixed gas) or humidity sensor.
- ☐ Initial commissioning (automatic determination of the system performance curve).
- ☐ Control of external shutters.
- ☐ Connection of a fire alarm contact.
- ☐ Weekly or daily programme.
- ☐ Pressure monitoring of filter contamination.
- ☐ Indication of necessary filter replacement, operating status, error messages.
- ☐ Different access levels. The ventilation unit is alternatively controllable via ModBus (RS 485, TCP/IP).

### ■ Electrical connection

Easily accessible terminal box on the side of the casing. The isolator/main switch can be controlled from below the unit for maintenance work and it can be locked with a padlock to prevent unauthorised access.

### ■ Post-heating

#### Type KWL EC Pro WW

The integrated warm water heating element guarantees the convenient and energy-efficient post-heating of supply air. The setpoint temperature is simply set in the control element. The hydraulic unit (Type WHSH HE 24 V (0-10 V), accessories) is recommended for controlling the warm water heat exchanger.

### ■ Reference

The ventilation unit design according to VDI 6022 requires the use of VDI 6022-compliant air filters. The use of original replacement air filters is therefore mandatory.

### ■ Replacement air filter

- 1 pc. ISO ePM<sub>10</sub> 50% (M5)  
ELF-KWL 700 D/5 VDI No.04189
- 1 pc. ISO ePM<sub>1</sub> 55% (F7)  
ELF-KWL 700 D/7 VDI No.04191

### ■ Control lines

- ALB EC-SK 20 20m No. 06816
  - ALB EC-SK 40 40m No. 06817
- 8-pin AWG24 twisted pair cable for the control element.

### ■ Other accessories Page

- |                            |        |
|----------------------------|--------|
| KWL peripherals            | 70 ff. |
| – Air distribution systems | 86 ff. |
| – Further overview         | 90 f.  |


### Accessory details

Ventilation grilles, ducts, fittings, roof outlets, extract air elements

**Standard range catalogue**

### Performance curve KWL EC 700 D

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L <sub>WA</sub>	Extract air	dB(A)	53	46	49	47	41	40	34	23
L <sub>WA</sub>	Supply air	dB(A)	68	54	65	63	59	53	48	39
L <sub>PA</sub> at 1 m	Radiation	dB(A)	47	33	41	43	41	35	29	14

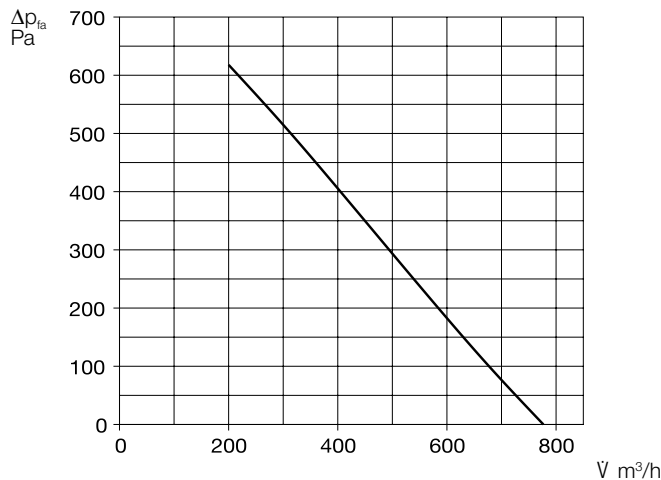

### ■ Included in delivery:

#### Surface comfort control element

User-friendly control via self-explanatory graphic elements with clear text directly on the touchscreen. Control line (10 metres) included in delivery, other lengths available (ALB EC-SK, accessories).

Dim. mm (W x H x D) 115 x 80 x 25



Control element with connection cable (10 m) included in the scope of delivery. Dim. mm (W x H x D) 115 x 80 x 25

### ■ Accessories for Type Pro WW

#### Hydraulic unit

##### WHS HE 24 V (0-10V) No. 08318

Controls the water temperature of the PWW heating element using a three-way valve actuator 24 V (0-10 V) and thus the heat output transferred to the air. Delivered as a complete unit, incl. VL- /RL temperature display, circulating pump and flexible connection hoses.



### ■ Accessories for all types

#### Room sensor – Air quality

AIR1/KWL-VOC 0-10V No. 20250

AIR1/KWL-CO2 0-10V No. 20251

AIR1/KWL-FTF 0-10V No. 20252

For measuring the CO<sub>2</sub>, mixed gas (VOC) concentration or relative room air humidity. A maximum of one sensor can be connected.

Dim. mm (W x H x D) 85 x 85 x 27



#### Room sensor – Temperature

TFR-ALB/KWL No. 07277

For measuring the room temperature and controlling the ventilation unit according to the set value. Incl. 20 m control line. Maximum total of one sensor can be connected.

Dim. mm (W x H x D) 80 x 80 x 25



#### Transition piece – Symmetrical

KWL-ÜS 700 D No. 04206

From unit flange to round duct systems.

#### Flexible connecting sleeve


FM 250 No. 01672

For acoustic decoupling, incl. 2 pcs. hose clamps.

#### Duct shutter, motorised

RVMD 250/230V No. 40252

Prevents cold draughts when the unit is at a standstill. Can be installed horizontally and vertically in any direction and with attached spring return motor (outside of air flow).



Dimensions in mm



Technical data	KWL EC 700 D			KWL EC 700 D, with warm water post-heater		
	Type	Ref. no.		Type	Ref. no.	
For ceiling installation	KWL EC 700 D Pro	04171		KWL EC 700 D Pro WW	04172	
<b>Flow rate at level<sup>1)</sup></b>	③	②	①	③	②	①
Supply air/extract air $\dot{V}$ m <sup>3</sup> /h approx.	510	330	210	510	330	210
<b>Noise dB(A)<sup>2)</sup></b>						
Supply air $L_{WA}$ (sound power)	69	64	61	70	65	61
Extract air $L_{WA}$ (sound power)	58	52	48	58	52	48
Radiation $L_{PA}$ at 1 m	37	32	30	38	33	30
Power consumption fans 2 x W	110	60	38	110	60	38
Voltage/Frequency	230 V~, 50 Hz			230 V~, 50 Hz		
Rated current A – Ventilation	2.3			2.3		
– Preheating	12.0			12.0		
– max. total	14.3			14.3		
Heat output/Postheater kW	–			2.3 (at 60/40 °C) / 2.1 (at 50/40 °C) / 1.3 (at 40/30 °C)		
Electric preheater kW	2.6			2.6		
Summer bypass	automatic			automatic		
Wiring diagram no.	1370			1370		
Temperature operating range	–20 °C to +40 °C			–20 °C to +40 °C		
Connection PWW heating element	–			IG 1/2"		
Weight approx. kg	110			115		


<sup>1)</sup> Values based on operating ranges defined according to PHI (Passive House Institute).

<sup>2)</sup> At 100 Pa.

## KWL EC 1400 D



## Dimensions KWL EC 1400 D

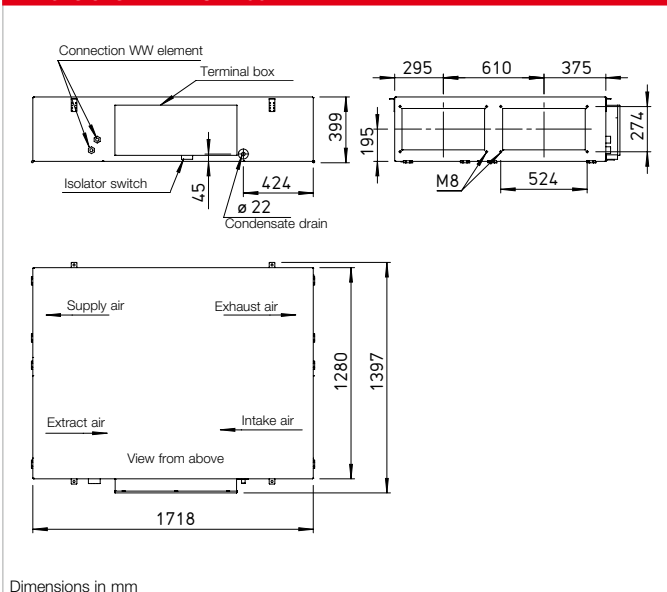

**Ultra-flat ventilation units with heat recovery for compact and space-saving ceiling installation.**

With a wide range of residential, commercial and industrial applications. Independently certified hygiene properties and energy efficiency according to VDI 6022 and the passive house standard. Unit construction and unit components fulfil the general hygiene requirements according to VDI 6022.

Available in various comfort and equipment variants.

### ■ Casing

Double-walled, made of galvanised steel sheet, with 30 mm heat and sound insulation on all sides. The inspection openings for filter replacement are accessible at the bottom of the unit without tools.

Ceiling installation via vibration-damping fastening elements included in the delivery.

### ■ Heat exchanger

Large cross counterflow heat exchanger made of aluminium with heat recovery efficiency of up to 90 %. Dismantling possible in just a few simple steps.

### ■ Fans

Two low-noise high-performance EC fans with backward-curved impellers guarantee maximum energy efficiency. The special control technology enables constant volume control or constant pressure control.

### ■ Ducts

Installation-friendly connection of intake, exhaust, extract and supply air through pipe or duct system NW 315 mm.

### ■ Condensate connection

A separate condensate tray below the heat exchanger facilitates maintenance work on the unit. Drain connectors on the side next to the terminal box. Ball siphon included in delivery. On-site connection to drain pipe.

### ■ Air filter

Standard equipment: Clean intake air supply via ISO ePM<sub>1</sub> 55% filter (F7). The heat exchanger requires a ISO ePM<sub>10</sub> 50% filter (M5) on the extract air side. All filters are pressure-controlled and exchangeable in just a few simple steps.

### ■ Summer operation

Standard equipment with automatic bypass function for maximum comfort.

### ■ Heat exchanger anti-icing protection

An electric preheating element heats the intake air at very low outdoor temperatures. Thus, it prevents the heat exchanger from icing up and guarantees its safe functioning and optimal heat recovery during the entire heating period.

### ■ Power control

The comfort control element with graphic display and user-friendly menu navigation, which is included in the delivery, enables the following functions:

- ☐ Control directly via touchscreen.
- ☐ Freely definable operating points within the entire range of the performance curve.
- ☐ Selection between constant volume control or constant pressure control.
- ☐ Demand-oriented ventilation using CO<sub>2</sub>, VOC (mixed gas) or humidity sensor.
- ☐ Initial commissioning (automatic determination of the system performance curve).
- ☐ Control of external shutters.
- ☐ Connection of a fire alarm contact.
- ☐ Weekly or daily programme.
- ☐ Pressure monitoring of filter contamination.
- ☐ Indication of necessary filter replacement, operating status, error messages.
- ☐ Different access levels. The ventilation unit is alternatively controllable via ModBus (RS 485, TCP/IP).

### ■ Electrical connection

Easily accessible terminal box on the side of the casing. The isolator/main switch can be controlled from below the unit for maintenance work and it can be locked with a padlock to prevent unauthorised access.

### ■ Post-heating

#### Type KWL EC Pro WW

The integrated warm water heating element guarantees the convenient and energy-efficient post-heating of supply air. The setpoint temperature is simply set in the control element. The hydraulic unit (Type WHSH HE 24 V (0-10 V), accessories) is recommended for controlling the warm water heat exchanger.

### ■ Reference

The ventilation unit design according to VDI 6022 requires the use of VDI 6022-compliant air filters. The use of original replacement air filters is therefore mandatory.

### ■ Replacement air filter

- 1 pc. ISO ePM<sub>10</sub> 50% (M5)  
ELF-KWL 1400 D/5 VDI No.04193
- 1 pc. ISO ePM<sub>1</sub> 55% (F7)  
ELF-KWL 1400 D/7 VDI No.04195

### ■ Control lines

- ALB EC-SK 20 20m No. 06816
  - ALB EC-SK 40 40m No. 06817
- 8-pin AWG24 twisted pair cable for the control element.

### ■ Other accessories

	Page
KWL peripherals	70 ff.
– Air distribution systems	86 ff.
– Further overview	90 f.


### Accessory details

Ventilation grilles, ducts, fittings, roof outlets, extract air elements

**Standard range catalogue**

**Performance curve KWL EC 1400 D**

Frequency		Hz	Tot.	125	250	500	1k	2k	4k	8k
L <sub>WA</sub>	Extract air	dB(A)	60	51	53	53	50	51	49	45
L <sub>WA</sub>	Supply air	dB(A)	80	63	68	71	71	75	71	70
L <sub>PA</sub> at 1 m	Radiation	dB(A)	53	42	48	48	47	43	33	21

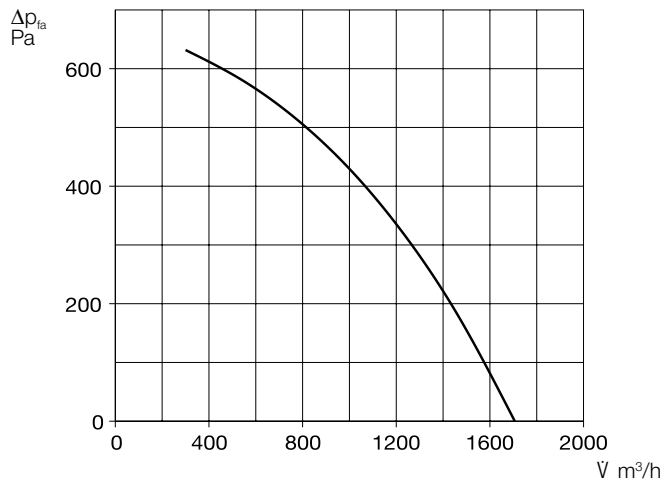

**Included in delivery:**

**Surface comfort control element**

User-friendly control via self-explanatory graphic elements with clear text directly on the touchscreen. Control line (10 metres) included in delivery, other lengths available (ALB EC-SK, accessories).  
Dim. mm (W x H x D) 115 x 80 x 25



Control element with connection cable (10 m) included in the scope of delivery.  
Dim. mm (W x H x D) 115 x 80 x 25

**Accessories for Type Pro WW**

**Hydraulic unit**

**WHSH HE 24 V (0-10V) No. 08318**

Controls the water temperature of the PWW heating element using a three-way valve actuator 24 V (0-10 V) and thus the heat output transferred to the air. Delivered as a complete unit, incl. VL-/RL temperature display, circulating pump and flexible connection hoses.



**Accessories for all types**

**Room sensor – Air quality**

**AIR1/KWL-VOC 0-10V** No. 20250

**AIR1/KWL-CO2 0-10V** No. 20251

**AIR1/KWL-FTF 0-10V** No. 20252

For measuring the CO<sub>2</sub>, mixed gas (VOC) concentration or relative room air humidity. A maximum of one sensor can be connected.  
Dim. mm (W x H x D) 85 x 85 x 27



**Room sensor – Temperature**

**TFR-ALB/KWL** No. 07277

For measuring the room temperature and controlling the ventilation unit according to the set value. Incl. 20 m control line. Maximum total of one sensor can be connected.  
Dim. mm (W x H x D) 80 x 80 x 25



**Transition piece – Symmetrical**

**KWL-ÜS 1400 D** No. 04207

For acoustic decoupling, incl. 2 pcs. hose clamps.

**Flexible connecting sleeve**


**FM 315** No. 01674

For acoustic decoupling, incl. 2 pcs. hose clamps.

**Duct shutter, motorised**

**RVMD 315/230V** No. 40253

Prevents cold draughts when the unit is at a standstill. Can be installed horizontally and vertically in any direction and with attached spring return motor (outside of air flow).



Dimensions in mm



Technical data	KWL EC 1400 D			KWL EC 1400 D, with warm water post-heater		
	Type	Ref. no.		Type	Ref. no.	
For ceiling installation	KWL EC 1400 D Pro	04173		KWL EC 1400 D Pro WW	04174	
<b>Flow rate at level<sup>1)</sup></b>	③	②	①	③	②	①
Supply air/extract air $\dot{V}$ m <sup>3</sup> /h approx.	1000	650	400	1000	650	400
<b>Noise dB(A)<sup>2)</sup></b>						
Supply air L <sub>WA</sub> (sound power)	82	79	76	82	79	76
Extract air L <sub>WA</sub> (sound power)	67	63	61	67	63	61
Radiation L <sub>PA</sub> at 1 m	52	50	48	52	50	48
Power consumption fans 2 x W	225	140	80	225	140	80
Voltage/Frequency	3N~, 400 V, 50 Hz			3N~, 400 V, 50 Hz		
Rated current A – Ventilation	6.0 / – / –			6.0 / – / –		
– Preheating	– / 11.4 / 11.4			– / 11.4 / 11.4		
– max. total	6.0 / 11.4 / 11.4			6.0 / 11.4 / 11.4		
Heat output/Postheater kW	–			4.7 (at 60/40 °C) / 4.2 (at 50/40 °C) / 2.7 (at 40/30 °C)		
Electric preheater kW	4.1			4.1		
Summer bypass	automatic			automatic		
Wiring diagram no.	1370			1370		
Temperature operating range	–20 °C to +40 °C			–20 °C to +40 °C		
Connection PWW heating element	–			IG 1/2"		
Weight approx. kg	185			190		


<sup>1)</sup> Values based on operating ranges defined according to PHI (Passive House Institute).

<sup>2)</sup> At 215 Pa.

## KWL EC 2000 D



## Dimensions KWL EC 2000 D

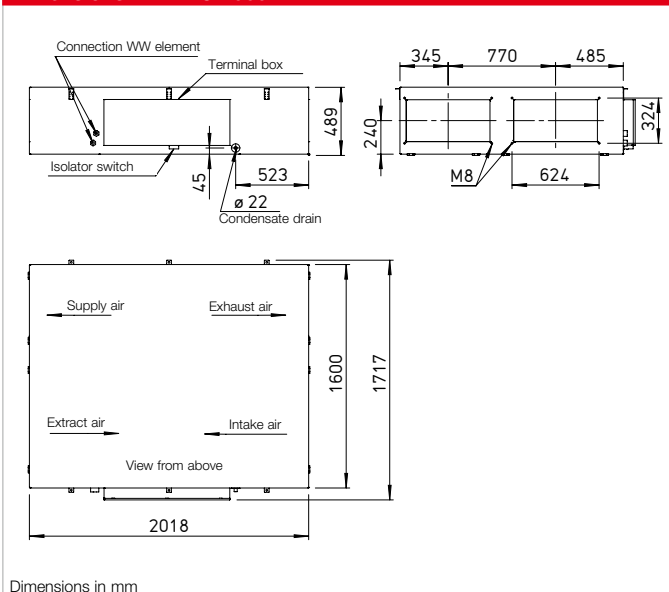

**Ultra-flat ventilation units with heat recovery for compact and space-saving ceiling installation.**

With a wide range of residential, commercial and industrial applications. Independently certified hygiene properties and energy efficiency according to VDI 6022 and the passive house standard. Unit construction and unit components fulfil the general hygiene requirements according to VDI 6022.

Available in various comfort and equipment variants.

### ■ Casing

Double-walled, made of galvanised steel sheet, with 30 mm heat and sound insulation on all sides. The inspection openings for filter replacement are accessible at the bottom of the unit without tools.

Ceiling installation via vibration-damping fastening elements included in the delivery.

### ■ Heat exchanger

Large cross counterflow heat exchanger made of aluminium with heat recovery efficiency of up to 90 %. Dismantling possible in just a few simple steps.

### ■ Fans

Two low-noise high-performance EC fans with backward-curved impellers guarantee maximum energy efficiency. The special control technology enables constant volume control or constant pressure control.

### ■ Ducts

Installation-friendly connection of intake, exhaust, extract and supply air through pipe or duct system NW 400 mm.

### ■ Condensate connection

A separate condensate tray below the heat exchanger facilitates maintenance work on the unit. Drain connectors on the side next to the terminal box. Ball siphon included in delivery. On-site connection to drain pipe.

### ■ Air filter

Standard equipment: Clean intake air supply via ISO ePM<sub>1</sub> 55% filter (F7). The heat exchanger requires a ISO ePM<sub>10</sub> 50% filter (M5) on the extract air side. All filters are pressure-controlled and exchangeable in just a few simple steps.

### ■ Summer operation

Standard equipment with automatic bypass function for maximum comfort.

### ■ Heat exchanger anti-icing protection

An electric preheating element heats the intake air at very low outdoor temperatures. Thus, it prevents the heat exchanger from icing up and guarantees its safe functioning and optimal heat recovery during the entire heating period.

### ■ Power control

The comfort control element with graphic display and user-friendly menu navigation, which is included in the delivery, enables the following functions:

- ☐ Control directly via touchscreen.
- ☐ Freely definable operating points within the entire range of the performance curve.
- ☐ Selection between constant volume control or constant pressure control.
- ☐ Demand-oriented ventilation using CO<sub>2</sub>, VOC (mixed gas) or humidity sensor.
- ☐ Initial commissioning (automatic determination of the system performance curve).
- ☐ Control of external shutters.
- ☐ Connection of a fire alarm contact.
- ☐ Weekly or daily programme.
- ☐ Pressure monitoring of filter contamination.
- ☐ Indication of necessary filter replacement, operating status, error messages.
- ☐ Different access levels. The ventilation unit is alternatively controllable via ModBus (RS 485, TCP/IP).

### ■ Electrical connection

Easily accessible terminal box on the side of the casing. The isolator/main switch can be controlled from below the unit for maintenance work and it can be locked with a padlock to prevent unauthorised access.

### ■ Post-heating

#### Type KWL EC Pro WW

The integrated warm water heating element guarantees the convenient and energy-efficient post-heating of supply air. The setpoint temperature is simply set in the control element. The hydraulic unit (Type WSH HE 24 V (0-10 V), accessories) is recommended for controlling the warm water heat exchanger.

### ■ Reference

The ventilation unit design according to VDI 6022 requires the use of VDI 6022-compliant air filters. The use of original replacement air filters is therefore mandatory.

### ■ Replacement air filter

- 1 pc. ISO ePM<sub>10</sub> 50% (M5)  
ELF-KWL 2000 D/5 VDI No. 04197
- 1 pc. ISO ePM<sub>1</sub> 55% (F7)  
ELF-KWL 2000 D/7 VDI No. 04204

### ■ Control lines

- ALB EC-SK 20 20m No. 06816
  - ALB EC-SK 40 40m No. 06817
- 8-pin AWG24 twisted pair cable for the control element.

### ■ Other accessories

	Page
KWL peripherals	70 ff.
– Air distribution systems	86 ff.
– Further overview	90 f.


### Accessory details

Ventilation grilles, ducts, fittings, roof outlets, extract air elements

**Standard range catalogue**

Performance curve KWL EC 2000 D

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L <sub>WA</sub> Extract air	dB(A)	59	56	52	48	49	47	45	40
L <sub>WA</sub> Supply air	dB(A)	77	66	68	67	72	69	64	
L <sub>PA</sub> at 1 m Radiation	dB(A)	50	46	42	43	44	38	31	21

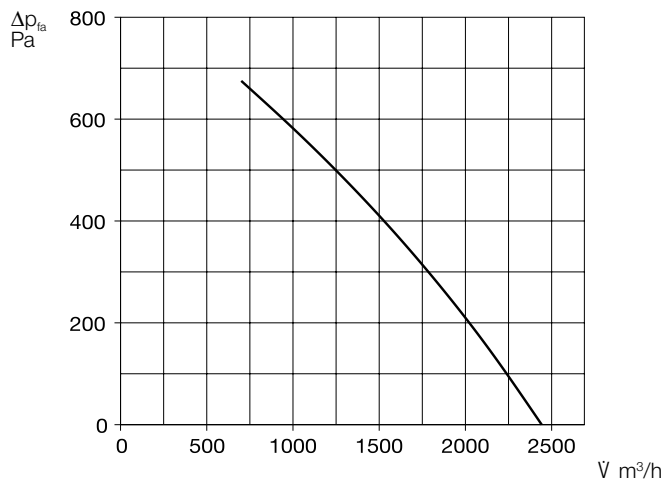

■ Included in delivery:

**Surface comfort control element**

User-friendly control via self-explanatory graphic elements with clear text directly on the touchscreen. Control line (10 metres) included in delivery, other lengths available (ALB EC-SK, accessories).  
Dim. mm (WxHxD) 115x80x25



Control element with connection cable (10 m) included in the scope of delivery.  
Dim. mm (WxHxD) 115 x 80 x 25

■ Accessories for Type Pro WW

**Hydraulic unit**

**WHSH HE 24 V (0-10V)** No. 08318

Controls the water temperature of the PWW heating element using a three-way valve actuator 24 V (0-10 V) and thus the heat output transferred to the air. Delivered as a complete unit, incl. VL- /RL temperature display, circulating pump and flexible connection hoses.



■ Accessories for all types

**Room sensor – Air quality**

**AIR1/KWL-VOC 0-10V** No. 20250

**AIR1/KWL-CO2 0-10V** No. 20251

**AIR1/KWL-FTF 0-10V** No. 20252

For measuring the CO<sub>2</sub>, mixed gas (VOC) concentration or relative room air humidity. A maximum of one sensor can be connected.

Dim. mm (W x H x D) 85 x 85 x 27



**Room sensor – Temperature**

**TFR-ALB/KWL** No. 07277

For measuring the room temperature and controlling the ventilation unit according to the set value. Incl. 20 m control line. Maximum total of one sensor can be connected.

Dim. mm (W x H x D) 80 x 80 x 25



**Transition piece – Symmetrical**

**KWL-ÜS 2000 D** No. 04208

From unit flange to round duct systems.

**Flexible connecting sleeve**


**FM 400** No. 01676

For acoustic decoupling, incl. 2 pcs. hose clamps.

**Duct shutter, motorised**

**RVMD 400/230V** No. 40255

Prevents cold draughts when the unit is at a standstill. Can be installed horizontally and vertically in any direction and with attached spring return motor (outside of air flow).



Dimensions in mm



Technical data	KWL EC 2000 D			KWL EC 2000 D, with warm water post-heater		
	Type	Ref. no.		Type	Ref. no.	
For ceiling installation	KWL EC 2000 D Pro	04175		KWL EC 2000 D Pro WW	04176	
<b>Flow rate at level<sup>1)</sup></b>	③	②	①	③	②	①
Supply air/extract air V m³/h approx.	1800	1150	720	1800	1150	720
<b>Noise dB(A)<sup>2)</sup></b>						
Supply air L <sub>WA</sub> (sound power)	77	74	72	77	74	72
Extract air L <sub>WA</sub> (sound power)	62	59	58	62	59	58
Radiation L <sub>PA</sub> at 1 m	52	51	49	52	51	50
Power consumption fans 2 x W	395	245	150	395	245	150
Voltage/Frequency	3N~, 400 V, 50 Hz			3N~, 400 V, 50 Hz		
Rated current A – Ventilation	6.0 / – / –			6.0 / – / –		
– Preheating	10.0 / 11.0 / 11.0			10.0 / 11.0 / 11.0		
– max. total	16.0 / 11.0 / 11.0			16.0 / 11.0 / 11.0		
Heat output/Postheater kW	–			8.1 (at 60/40 °C) / 7.3 (at 50/40 °C) / 4.6 (at 40/30 °C)		
Electric preheater kW	6.6			6.6		
Summer bypass	automatic			automatic		
Wiring diagram no.	1370			1370		
Temperature operating range	–20 °C to +40 °C			–20 °C to +40 °C		
Connection PWW heating element	–			IG 1/2"		
Weight approx. kg	265			270		

<sup>1)</sup> Values based on operating ranges defined according to PHI (Passive House Institute).

<sup>2)</sup> At 250 Pa.

## KWL EC 800 S



KWL EC 800 S with base cover (accessories)



Central units with heat recovery for compact and space-saving floor installation (floor standing).

With a wide range of residential, commercial and industrial applications.

Independently certified hygiene properties and energy efficiency according to VDI 6022 and the passive house standard. Unit construction and unit components fulfil the general hygiene requirements according to VDI 6022. Optionally available with integrated warm water heating element.

### ■ Casing

Double-walled, made of galvanised steel sheet, with 30 mm heat and sound insulation on all sides.

Inspection openings for filter replacement fastened to both side panels with screws.

Both side walls can be completely dismantled for free access to all components.

The unit is suitable for floor installation (standing) indoors.

Vibration dampers can be underlaid (on-site) to prevent the direct transmission of vibrations and structure-borne noise to building parts.

### ■ Heat exchanger

Large cross counterflow heat exchanger made of aluminium with heat recovery efficiency of up to 90 %. Dismantling possible in just a few simple steps.

### ■ Fans

Two low-noise high-performance EC fans with backward-curved impellers guarantee maximum energy efficiency. The special control technology enables constant volume control or constant pressure control.

### ■ Ducts

Installation-friendly connection of intake, exhaust, extract and supply air through pipe or duct system NW 250 mm. The floor-standing unit can be rotated 180° for installation so that intake air and exhaust air as well as extract air and supply air connections can be on the left or right sides.

### ■ Condensate connection

The unit contains a stainless steel condensate tray with a condensate drain below. Ball siphon included in delivery. On-site connection to drain pipe.


### ■ Air filter

Standard equipment: Clean intake air supply via ISO ePM<sub>10</sub> 55% filter (F7). The heat exchanger requires a ISO ePM<sub>10</sub> 50% filter (M5) on the extract air side. All filters are pressure-controlled and exchangeable in just a few simple steps.

### ■ Summer operation

Standard equipment with automatic bypass function for maximum comfort.

## Dimensions KWL EC 800 S

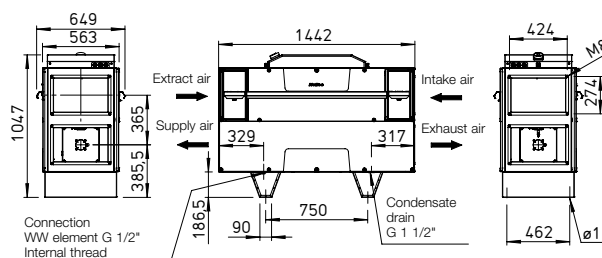

Dimensions in mm

### ■ Heat exchanger anti-icing protection

An electric preheating element heats the intake air at very low outdoor temperatures. Thus, it prevents the heat exchanger from icing up and guarantees its safe functioning and optimal heat recovery during the entire heating period.

### ■ Power control

The comfort control element with graphic display and user-friendly menu navigation, which is included in the delivery, enables the following functions:

- ☐ Control directly via touchscreen.
- ☐ Freely definable operating points within the entire range of the performance curve.
- ☐ Selection between constant volume control or constant pressure control.
- ☐ Demand-oriented ventilation using CO<sub>2</sub>, VOC (mixed gas) or humidity sensor.
- ☐ Building control system via ModBus (RS 485, TCP/IP).
- ☐ Initial commissioning (automatic determination of the system performance curve).
- ☐ Control of external shutters.
- ☐ Connection of a fire alarm contact.
- ☐ Weekly or daily programme.
- ☐ Pressure monitoring of filter contamination.
- ☐ Indication of necessary filter replacement, operating status, error messages.
- ☐ Different access levels.

### ■ Electrical connection

Easily accessible terminal box on top of the casing. The isolator/main switch can be controlled from below the unit for maintenance work and it can be locked with a padlock to prevent unauthorised access.

### ■ Post-heating

#### Type KWL EC Pro WW

The integrated warm water heating element guarantees the convenient and energy-efficient post-heating of supply air. The setpoint temperature is simply set in the control element. The hydraulic unit (Type WSH HE 24 V (0-10 V), accessories) is recommended for controlling the warm water heat exchanger.

### ■ Reference

The ventilation unit design according to VDI 6022 requires the use of VDI 6022-compliant air filters. The use of original replacement air filters is therefore mandatory.

### ■ Replacement air filter

- 1 pc. ISO ePM<sub>10</sub> 50% filter  
ELF-KWL 800 S/5 VDI No. 08256
- 1 pc. ISO ePM<sub>10</sub> 55% filter  
ELF-KWL 800 S/7 VDI No. 08257

### ■ Control lines

- ALB EC-SK 20 20m No. 06816
  - ALB EC-SK 40 40m No. 06817
- 8-pin AWG24 twisted pair cable for the control element.

### ■ Other accessories

	Page
KWL peripherals	70 ff.
– Air distribution systems	86 ff.
– Further overview	90 f.


### ■ Accessory details

Ventilation grilles, ducts, fittings, roof outlets, extract air elements

**Standard range catalogue**

### Performance curve KWL EC 800 S

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
$L_{WA}$	Extract air	dB(A)	70	65	68	54	49	43	34
$L_{WA}$	Supply air	dB(A)	78	76	73	67	63	55	55
$L_{PA}$ at 1 m	Radiation	dB(A)	54	50	50	42	42	31	25

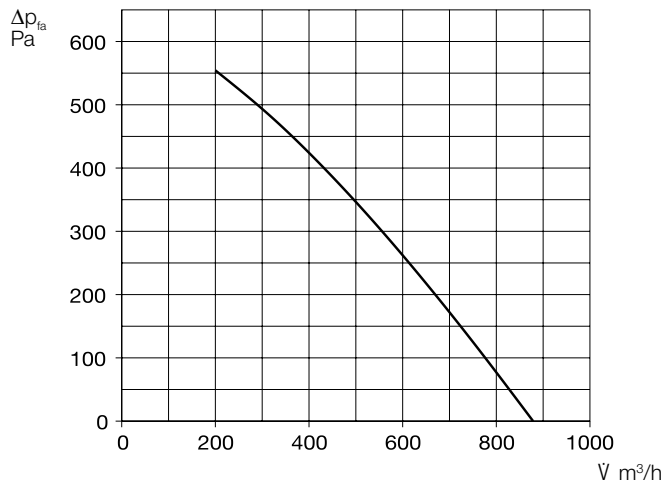

### ■ Included in delivery:

#### Surface comfort control element

User-friendly control via self-explanatory graphic elements with clear text directly on the touchscreen. Control line (10 metres) included in delivery, other lengths available (ALB EC-SK, accessories).

Dim. mm (WxHxD) 115x80x25



Control element with connection cable (10 m) included in the scope of delivery. Dim. mm (WxHxD) 115 x 80 x 25

### ■ Accessories for Type Pro WW

#### Hydraulic unit

##### WHSB HE 24 V (0-10V) No. 08318

Controls the water temperature of the PWW heating element using a three-way valve actuator 24 V (0-10 V) and thus the heat output transferred to the air. Delivered as a complete unit, incl. VL- /RL temperature display, circulating pump and flexible connection hoses.



### ■ Accessories for all types

#### Room sensor – Air quality

AIR1/KWL-VOC 0-10V No. 20250

AIR1/KWL-CO2 0-10V No. 20251

AIR1/KWL-FTF 0-10V No. 20252

For measuring the CO<sub>2</sub>, mixed gas (VOC) concentration or relative room air humidity. A maximum of one sensor can be connected.

Dim. mm (W x H x D) 85 x 85 x 27



#### Room sensor – Temperature

TFR-ALB/KWL No. 07277

For measuring the room temperature and controlling the ventilation unit according to the set value. Incl. 20 m control line. Maximum total of one sensor can be connected.

Dim. mm (W x H x D) 80 x 80 x 25



#### Transition piece – Symmetrical

KWL-ÜS 800 S No. 08339

From unit flange to round duct systems.

#### Flexible connecting sleeve


FM 250 No. 01672

For acoustic decoupling, incl. 2 pcs. hose clamps.

#### Duct shutter, motorised

RVMD 250/230V No. 40252

Prevents cold draughts when the unit is at a standstill. Can be installed horizontally and vertically in any direction and with attached spring return motor (outside of air flow).



Dimensions in mm

#### Base cover

KWL-SB 800 S No. 09315

Made of galvanised steel sheet.



Technical data	KWL EC 800 S			KWL EC 800 S, with warm water post-heater		
	Type	Ref. no.		Type	Ref. no.	
For floor-standing installation	KWL EC 800 S Pro	08327		KWL EC 800 S Pro WW	08328	
Flow rate at level <sup>1)</sup>	③	②	①	③	②	①
Supply air / extract V m³/h approx.	600	490	325	600	490	325
Noise dB(A) at 620 m³/h and 195 Pa						
Supply air $L_{WA}$ (sound power)	70	67	63	70	67	63
Extract air $L_{WA}$ (sound power)	60	60	58	60	60	58
Radiation $L_{PA}$ at 1 m	45	43	40	45	43	40
Power consumption fans 2xW	97	70	40	97	70	40
Standby power consumption	< 1 W			< 1 W		
Voltage/Frequency	1~, 230 V, 50 Hz			1~, 230 V, 50 Hz		
Rated current A – Ventilation	3.0			3.0		
– Preheating	11.0			11.0		
– max. total	14.0			14.0		
Electric preheater kW	2.4			2.4		
Heat output/post-heating element kW	–			2.8 (at 60/40 °C) / 2.6 (at 50/40 °C) / 1.6 (at 40/30 °C)		
Summer bypass	automatic (adjustable), with heat exchanger cover			automatic (adjustable), with heat exchanger cover		
Wiring diagram no.	1370			1370		
Temperature operating range	–20 °C to +40 °C			–20 °C to +40 °C		
Installation temperature	+5 °C to +40 °C			+5 °C to +40 °C		
Connection PWW heating element	–			IG 1/2"		
Weight approx. kg	172			175		

<sup>1)</sup> Values based on operating ranges defined according to PHI (Passive House Institute).

## KWL EC 1200 S



KWL EC 1200 S with base cover (accessories)



Central units with heat recovery for compact and space-saving floor installation (floor standing).

With a wide range of residential, commercial and industrial applications.

Independently certified hygiene properties and energy efficiency according to VDI 6022 and the passive house standard. Unit construction and unit components fulfil the general hygiene requirements according to VDI 6022. Optionally available with integrated warm water heating element.

### ■ Casing

Double-walled, made of galvanised steel sheet, with 30 mm heat and sound insulation on all sides.

Inspection openings for filter replacement fastened to both side panels with screws.

Both side walls can be completely dismantled for free access to all components.

The unit is suitable for floor installation (standing) indoors.

Vibration dampers can be underlaid (on-site) to prevent the direct transmission of vibrations and structure-borne noise to building parts.

### ■ Heat exchanger

Large cross counterflow heat exchanger made of aluminium with heat recovery efficiency of up to 90 %. Dismantling possible in just a few simple steps.

### ■ Fans

Two low-noise high-performance EC fans with backward-curved impellers guarantee maximum energy efficiency. The special control technology enables constant volume control or constant pressure control.

### ■ Ducts

Installation-friendly connection of intake, exhaust, extract and supply air through pipe or duct system NW 355 mm. The floor-standing unit can be rotated 180° for installation so that intake air and exhaust air as well as extract air and supply air connections can be on the left or right sides.

### ■ Condensate connection

The unit contains a stainless steel condensate tray with a condensate drain below. Ball siphon included in delivery. On-site connection to drain pipe.


### ■ Air filter

Standard equipment: Clean intake air supply via ISO ePM<sub>1</sub>, 55% filter (F7). The heat exchanger requires a ISO ePM<sub>10</sub> 50% filter (M5) on the extract air side. All filters are pressure-controlled and exchangeable in just a few simple steps.

### ■ Summer operation

Standard equipment with automatic bypass function for maximum comfort.

## Dimensions KWL EC 1200 S

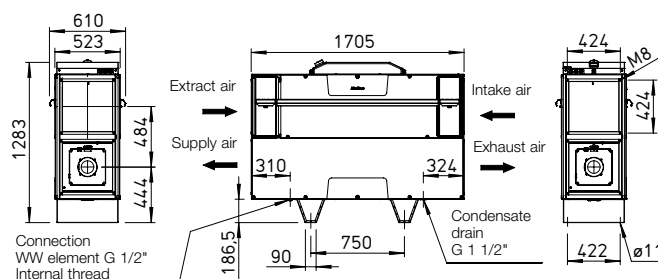

Dimensions in mm

### ■ Heat exchanger anti-icing protection

An electric preheating element heats the intake air at very low outdoor temperatures. Thus, it prevents the heat exchanger from icing up and guarantees its safe functioning and optimal heat recovery during the entire heating period.

### ■ Power control

The comfort control element with graphic display and user-friendly menu navigation, which is included in the delivery, enables the following functions:

- ☐ Control directly via touchscreen.
- ☐ Freely definable operating points within the entire range of the performance curve.
- ☐ Selection between constant volume control or constant pressure control.
- ☐ Demand-oriented ventilation using CO<sub>2</sub>, VOC (mixed gas) or humidity sensor.
- ☐ Building control system via ModBus (RS 485, TCP/IP).
- ☐ Initial commissioning (automatic determination of the system performance curve).
- ☐ Control of external shutters.
- ☐ Connection of a fire alarm contact.
- ☐ Weekly or daily programme.
- ☐ Pressure monitoring of filter contamination.
- ☐ Indication of necessary filter replacement, operating status, error messages.
- ☐ Different access levels.

### ■ Electrical connection

Easily accessible terminal box on top of the casing. The isolator/main switch can be controlled from below the unit for maintenance work and it can be locked with a padlock to prevent unauthorised access.

### ■ Post-heating

#### Type KWL EC Pro WW

The integrated warm water heating element guarantees the convenient and energy-efficient post-heating of supply air. The setpoint temperature is simply set in the control element. The hydraulic unit (Type WSH HE 24 V (0-10 V), accessories) is recommended for controlling the warm water heat exchanger.

### ■ Reference

The ventilation unit design according to VDI 6022 requires the use of VDI 6022-compliant air filters. The use of original replacement air filters is therefore mandatory.

### ■ Replacement air filter

- 1 pc. ISO ePM<sub>10</sub> 50% (M5)  
ELF-KWL 1200 S/5 VDI No.08347
- 1 pc. ISO ePM<sub>1</sub> 55% (F7)  
ELF-KWL 1200 S/7 VDI No.08348

### ■ Control lines

**ALB EC-SK 20 20m** No. 06816  
**ALB EC-SK 40 40m** No. 06817  
8-pin AWG24 twisted pair cable for the control element.

### ■ Other accessories

	Page
KWL peripherals	70 ff.
– Air distribution systems	86 ff.
– Further overview	90 f.


### ■ Accessory details

Ventilation grilles, ducts, fittings, roof outlets, extract air elements

**Standard range catalogue**

**Performance curve KWL EC 1200 S**

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
$L_{WA}$	Extract air	dB(A)	62	46	55	60	53	53	42
$L_{WA}$	Supply air	dB(A)	76	53	63	71	69	73	66
$L_{PA}$ at 1 m	Radiation	dB(A)	53	40	47	48	49	47	37

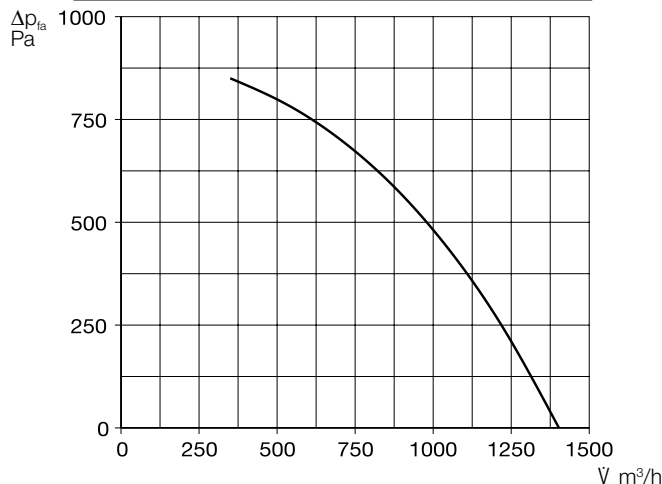
**Included in delivery:**
**Surface comfort control element**

User-friendly control via self-explanatory graphic elements with clear text directly on the touchscreen. Control line (10 metres) included in delivery, other lengths available (ALB EC-SK, accessories).

Dim. mm (W x H x D) 115 x 80 x 25



Control element with connection cable (10 m) included in the scope of delivery. Dim. mm (W x H x D) 115 x 80 x 25

**Accessories for Type Pro WW**
**Hydraulic unit**
**WHSB HE 24 V (0-10V) No. 08318**

Controls the water temperature of the PWW heating element using a three-way valve actuator 24 V (0-10 V) and thus the heat output transferred to the air. Delivered as a complete unit, incl. VL- / RL temperature display, circulating pump and flexible connection hoses.


**Accessories for all types**
**Room sensor – Air quality**

**AIR1/KWL-VOC 0-10V** No. 20250

**AIR1/KWL-CO2 0-10V** No. 20251

**AIR1/KWL-FTF 0-10V** No. 20252

For measuring the CO<sub>2</sub>, mixed gas (VOC) concentration or relative room air humidity. A maximum of one sensor can be connected.

Dim. mm (W x H x D) 85 x 85 x 27


**Room sensor – Temperature**

**TFR-ALB/KWL** No. 07277

For measuring the room temperature and controlling the ventilation unit according to the set value. Incl. 20 m control line. Maximum total of one sensor can be connected.

Dim. mm (W x H x D) 80 x 80 x 25


**Transition piece – Symmetrical**

**KWL-ÜS 1200 S** No. 08349

From unit flange to round duct systems.

**Flexible connecting sleeve**


**FM 355** No. 01675

For acoustic decoupling, incl. 2 pcs. hose clamps.

**Duct shutter, motorised**

**RVMD 355/230V** No. 40254

Prevents cold draughts when the unit is at a standstill. Can be installed horizontally and vertically in any direction and with attached spring return motor (outside of air flow).



Dimensions in mm

**Base cover**

**KWL-SB 1200 S** No. 09316

Made of galvanised steel sheet.



Technical data	KWL EC 1200 S			KWL EC 1200 S, with warm water post-heater		
	Type	Ref. no.		Type	Ref. no.	
<b>For floor-standing installation</b>	<b>KWL EC 1200 S Pro</b>	08345		<b>KWL EC 1200 S Pro WW</b>	08346	
<b>Flow rate at level<sup>1)</sup></b>	③	②	①	③	②	①
Supply air / extract $V \text{ m}^3/\text{h}$ approx.	1200	900	500	1200	900	500
<b>Noise dB(A) at 1300 m<sup>3</sup>/h and 75 Pa</b>						
Supply air $L_{WA}$ (sound power)	78	72	66	78	72	66
Extract air $L_{WA}$ (sound power)	62	58	53	62	58	53
Radiation $L_{PA}$ at 1 m	51	47	44	51	47	44
Power consumption fans 2xW	323	175	85	323	175	85
Standby power consumption	< 1 W			< 1 W		
Voltage/Frequency	3N~, 400 V, 50 Hz			3N~, 400 V, 50 Hz		
Rated current A – Ventilation	5.0 / – / –			5.0 / – / –		
– Preheating	– / 12.1 / 12.1			– / 12.1 / 12.1		
– max. total	5.0 / 12.1 / 12.1			5.0 / 12.1 / 12.1		
Electric preheater kW	4.2			4.2		
Heat output/post-heating element kW	–			2.8 (at 60/40 °C) / 2.6 (at 50/40 °C) / 1.6 (at 40/30 °C)		
Summer bypass	automatic (adjustable), with heat exchanger cover			automatic (adjustable), with heat exchanger cover		
Wiring diagram no.	1370			1370		
Temperature operating range	–20 °C to +40 °C			–20 °C to +40 °C		
Installation temperature	+5 °C to +40 °C			+5 °C to +40 °C		
Connection PWW heating element	–			IG 1/2"		
Weight approx. kg	250			256		

<sup>1)</sup> Values based on operating ranges defined according to PHI (Passive House Institute).

## KWL EC 1800 S



KWL EC 1800 S with base cover (accessories)



Central units with heat recovery for compact and space-saving floor installation (floor standing).

With a wide range of residential, commercial and industrial applications.

Independently certified hygiene properties and energy efficiency according to VDI 6022 and the passive house standard. Unit construction and unit components fulfil the general hygiene requirements according to VDI 6022. Optionally available with integrated warm water heating element.

### ■ Casing

Double-walled, made of galvanised steel sheet, with 30 mm heat and sound insulation on all sides.

Inspection openings for filter replacement fastened to both side panels with screws.

Both side walls can be completely dismantled for free access to all components.

The unit is suitable for floor installation (standing) indoors.

Vibration dampers can be underlaid (on-site) to prevent the direct transmission of vibrations and structure-borne noise to building parts.

### ■ Heat exchanger

Large cross counterflow heat exchanger made of aluminium with heat recovery efficiency of up to 90 %. Dismantling possible in just a few simple steps.

### ■ Fans

Two low-noise high-performance EC fans with backward-curved impellers guarantee maximum energy efficiency. The special control technology enables constant volume control or constant pressure control.

### ■ Ducts

Installation-friendly connection of intake, exhaust, extract and supply air through pipe or duct system NW 400 mm. The floor-standing unit can be rotated 180° for installation so that intake air and exhaust air as well as extract air and supply air connections can be on the left or right sides.

### ■ Condensate connection

The unit contains a stainless steel condensate tray with a condensate drain below. Ball siphon included in delivery. On-site connection to drain pipe.


### ■ Air filter

Standard equipment: Clean intake air supply via ISO ePM<sub>1</sub>, 55% filter (F7). The heat exchanger requires a ISO ePM<sub>10</sub> 50% filter (M5) on the extract air side. All filters are pressure-controlled and exchangeable in just a few simple steps.

### ■ Summer operation

Standard equipment with automatic bypass function for maximum comfort.

## Dimensions KWL EC 1800 S

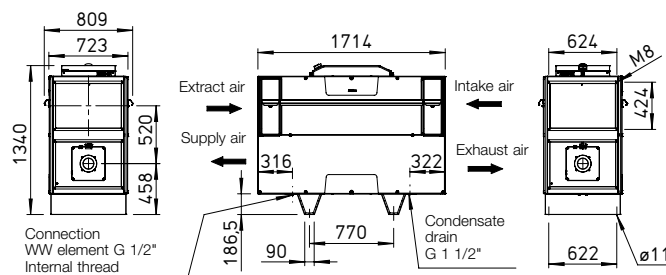

Dimensions in mm

### ■ Heat exchanger anti-icing protection

An electric preheating element heats the intake air at very low outdoor temperatures. Thus, it prevents the heat exchanger from icing up and guarantees its safe functioning and optimal heat recovery during the entire heating period.

### ■ Power control

The comfort control element with graphic display and user-friendly menu navigation, which is included in the delivery, enables the following functions:

- ☐ Control directly via touchscreen.
- ☐ Freely definable operating points within the entire range of the performance curve.
- ☐ Selection between constant volume control or constant pressure control.
- ☐ Demand-oriented ventilation using CO<sub>2</sub>, VOC (mixed gas) or humidity sensor.
- ☐ Building control system via ModBus (RS 485, TCP/IP).
- ☐ Initial commissioning (automatic determination of the system performance curve).
- ☐ Control of external shutters.
- ☐ Connection of a fire alarm contact.
- ☐ Weekly or daily programme.
- ☐ Pressure monitoring of filter contamination.
- ☐ Indication of necessary filter replacement, operating status, error messages.
- ☐ Different access levels.

### ■ Electrical connection

Easily accessible terminal box on top of the casing. The isolator/main switch can be controlled from below the unit for maintenance work and it can be locked with a padlock to prevent unauthorised access.

### ■ Post-heating

#### Type KWL EC Pro WW

The integrated warm water heating element guarantees the convenient and energy-efficient post-heating of supply air. The setpoint temperature is simply set in the control element. The hydraulic unit (Type WSH HE 24 V (0-10 V), accessories) is recommended for controlling the warm water heat exchanger.

### ■ Reference

The ventilation unit design according to VDI 6022 requires the use of VDI 6022-compliant air filters. The use of original replacement air filters is therefore mandatory.

### ■ Replacement air filter

- 1 pc. ISO ePM<sub>10</sub> 50% (M5)  
ELF-KWL 1800 S/5 VDI No.08258
- 1 pc. ISO ePM<sub>1</sub> 55% (F7)  
ELF-KWL 1800 S/7 VDI No.08259

### ■ Control lines

**ALB EC-SK 20 20m** No. 06816  
**ALB EC-SK 40 40m** No. 06817  
8-pin AWG24 twisted pair cable for the control element.

### ■ Other accessories

	Page
KWL peripherals	70 ff.
– Air distribution systems	86 ff.
– Further overview	90 f.


### ■ Accessory details

Ventilation grilles, ducts, fittings, roof outlets, extract air elements

**Standard range catalogue**

### Performance curve KWL EC 1800 S

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L <sub>WA</sub>	Extract air	dB(A)	61	54	58	51	52	49	38
L <sub>WA</sub>	Supply air	dB(A)	72	61	66	63	65	64	56
L <sub>PA</sub> at 1 m	Radiation	dB(A)	52	35	47	43	47	37	28

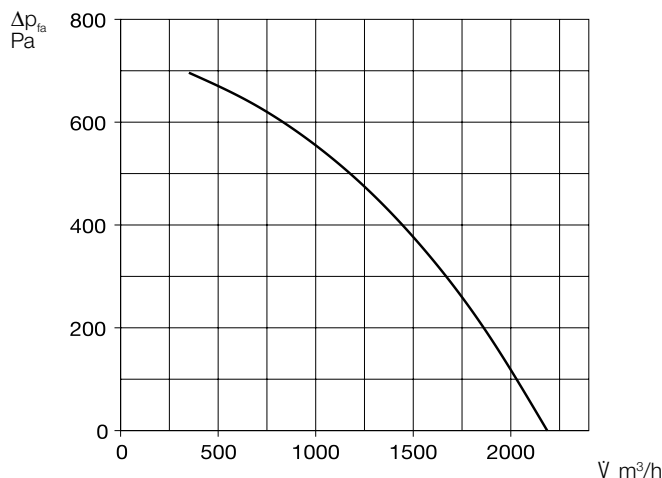

### ■ Included in delivery:

#### Surface comfort control element

User-friendly control via self-explanatory graphic elements with clear text directly on the touchscreen. Control line (10 metres) included in delivery, other lengths available (ALB EC-SK, accessories).

Dim. mm (W x H x D) 115 x 80 x 25



Control element with connection cable (10 m) included in the scope of delivery. Dim. mm (W x H x D) 115 x 80 x 25

### ■ Accessories for Type Pro WW

#### Hydraulic unit

#### WHSB HE 24 V (0-10V) No. 08318

Controls the water temperature of the PWW heating element using a three-way valve actuator 24 V (0-10 V) and thus the heat output transferred to the air. Delivered as a complete unit, incl. VL- / RL temperature display, circulating pump and flexible connection hoses.



### ■ Accessories for all types

#### Room sensor – Air quality

AIR1/KWL-VOC 0-10V No. 20250

AIR1/KWL-CO2 0-10V No. 20251

AIR1/KWL-FTF 0-10V No. 20252

For measuring the CO<sub>2</sub>, mixed gas (VOC) concentration or relative room air humidity. A maximum of one sensor can be connected.

Dim. mm (W x H x D) 85 x 85 x 27



#### Room sensor – Temperature

TFR-ALB/KWL No. 07277

For measuring the room temperature and controlling the ventilation unit according to the set value. Incl. 20 m control line. Maximum total of one sensor can be connected.

Dim. mm (W x H x D) 80 x 80 x 25



#### Transition piece – Symmetrical

KWL-ÜS 1800 S No. 08340

From unit flange to round duct systems.

#### Flexible connecting sleeve


FM 400 No. 01676

For acoustic decoupling, incl. 2 pcs. hose clamps.

#### Duct shutter, motorised

RVMD 400/230V No. 40255

Prevents cold draughts when the unit is at a standstill. Can be installed horizontally and vertically in any direction and with attached spring return motor (outside of air flow).



Dimensions in mm

#### Base cover

KWL-SB 1800 S No. 09317

Made of galvanised steel sheet.



Technical data	KWL EC 1800 S			KWL EC 1800 S, with warm water post-heater		
	Type	Ref. no.		Type	Ref. no.	
For floor-standing installation	KWL EC 1800 S Pro	08329		KWL EC 1800 S Pro WW	08330	
Flow rate at level <sup>1)</sup>	③	②	①	③	②	①
Supply air/extract V m³/h approx.	1700	1200	800	1200	900	500
Noise dB(A) at 1400 m³/h and 245 Pa						
Supply air L <sub>WA</sub> (sound power)	75	73	71	75	73	71
Extract air L <sub>WA</sub> (sound power)	61	61	59	61	61	59
Radiation L <sub>PA</sub> at 1 m	50	49	47	50	50	47
Power consumption fans 2xW	443	262	164	443	262	164
Standby power consumption	< 1 W			< 1 W		
Voltage/Frequency	3N~, 400 V, 50 Hz			3N~, 400 V, 50 Hz		
Rated current A – Ventilation	3.9 / – / –			3.9 / – / –		
– Preheating	6.6 / 6.6 / 6.6			6.6 / 6.6 / 6.6		
– max. total	10.5 / 6.6 / 6.6			10.5 / 6.6 / 6.6		
Electric preheater kW	4.5			4.5		
Heat output/post-heating element kW	–			5.2 (at 60/40 °C) / 4.9 (at 50/40 °C) / 3.0 (at 40/30 °C)		
Summer bypass	automatic (adjustable), with heat exchanger cover			automatic (adjustable), with heat exchanger cover		
Wiring diagram no.	1370			1370		
Temperature operating range	–20 °C to +40 °C			–20 °C to +40 °C		
Installation temperature	+5 °C to +40 °C			+5 °C to +40 °C		
Connection PWW heating element	–			IG 1/2"		
Weight approx. kg	290			295		

<sup>1)</sup> Values based on operating ranges defined according to PHI (Passive House Institute).

## KWL EC 2600 S



KWL EC 2600 S with base cover (accessories)



Central units with heat recovery for compact and space-saving floor installation (floor standing).

With a wide range of residential, commercial and industrial applications.

Independently certified hygiene properties and energy efficiency according to VDI 6022 and the passive house standard. Unit construction and unit components fulfil the general hygiene requirements according to VDI 6022. Optionally available with integrated warm water heating element.

### ■ Casing

Double-walled, made of galvanised steel sheet, with 30 mm heat and sound insulation on all sides.

Inspection openings for filter replacement fastened to both side panels with screws.

Both side walls can be completely dismantled for free access to all components.

The unit is suitable for floor installation (standing) indoors.

Vibration dampers can be underlaid (on-site) to prevent the direct transmission of vibrations and structure-borne noise to building parts.

### ■ Heat exchanger

Large cross counterflow heat exchanger made of aluminium with heat recovery efficiency of up to 90 %. Dismantling possible in just a few simple steps.

### ■ Fans

Two low-noise high-performance EC fans with backward-curved impellers guarantee maximum energy efficiency. The special control technology enables constant volume control or constant pressure control.

### ■ Ducts

Installation-friendly connection of intake, exhaust, extract and supply air through pipe or duct system NW 560 mm. The floor-standing unit can be rotated 180° for installation so that intake air and exhaust air as well as extract air and supply air connections can be on the left or right sides.

### ■ Condensate connection

The unit contains a stainless steel condensate tray with a condensate drain below. Ball siphon included in delivery. On-site connection to drain pipe.


### ■ Air filter

Standard equipment: Clean intake air supply via ISO ePM<sub>10</sub> 55% filter (F7). The heat exchanger requires a ISO ePM<sub>10</sub> 50% filter (M5) on the extract air side. All filters are pressure-controlled and exchangeable in just a few simple steps.

### ■ Summer operation

Standard equipment with automatic bypass function for maximum comfort.

## Dimensions KWL EC 2600 S

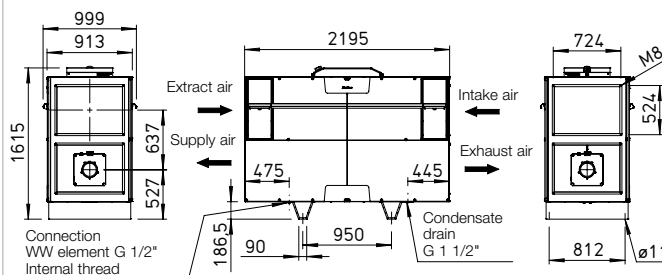

Dimensions in mm

### ■ Heat exchanger anti-icing protection

An electric preheating element heats the intake air at very low outdoor temperatures. Thus, it prevents the heat exchanger from icing up and guarantees its safe functioning and optimal heat recovery during the entire heating period.

### ■ Power control

The comfort control element with graphic display and user-friendly menu navigation, which is included in the delivery, enables the following functions:

- ☐ Control directly via touchscreen.
- ☐ Freely definable operating points within the entire range of the performance curve.
- ☐ Selection between constant volume control or constant pressure control.
- ☐ Demand-oriented ventilation using CO<sub>2</sub>, VOC (mixed gas) or humidity sensor.
- ☐ Building control system via ModBus (RS 485, TCP/IP).
- ☐ Initial commissioning (automatic determination of the system performance curve).
- ☐ Control of external shutters.
- ☐ Connection of a fire alarm contact.
- ☐ Weekly or daily programme.
- ☐ Pressure monitoring of filter contamination.
- ☐ Indication of necessary filter replacement, operating status, error messages.
- ☐ Different access levels.

### ■ Electrical connection

Easily accessible terminal box on top of the casing. The isolator/main switch can be controlled from below the unit for maintenance work and it can be locked with a padlock to prevent unauthorised access.

### ■ Post-heating

#### Type KWL EC Pro WW

The integrated warm water heating element guarantees the convenient and energy-efficient post-heating of supply air. The setpoint temperature is simply set in the control element. The hydraulic unit (Type WSH HE 24 V (0-10 V), accessories) is recommended for controlling the warm water heat exchanger.

### ■ Reference

The ventilation unit design according to VDI 6022 requires the use of VDI 6022-compliant air filters. The use of original replacement air filters is therefore mandatory.

### ■ Replacement air filter

- 1 pc. ISO ePM<sub>10</sub> 50% (M5)  
ELF-KWL 2600 S/5 VDI No.08308
- 1 pc. ISO ePM<sub>10</sub> 55% (F7)  
ELF-KWL 2600 S/7 VDI No.08325

### ■ Control lines

- ALB EC-SK 20 20m No. 06816
  - ALB EC-SK 40 40m No. 06817
- 8-pin AWG24 twisted pair cable for the control element.

### ■ Other accessories

	Page
KWL peripherals	70 ff.
– Air distribution systems	86 ff.
– Further overview	90 f.


### ■ Accessory details

Ventilation grilles, ducts, fittings, roof outlets, extract air elements

**Standard range catalogue**

**Performance curve KWL EC 2600 S**

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L <sub>WA</sub>	Extract air	dB(A)	62	52	58	56	54	49	27
L <sub>WA</sub>	Supply air	dB(A)	77	67	69	69	72	67	60
L <sub>PA</sub> at 1 m	Radiation	dB(A)	52	37	48	46	43	36	23

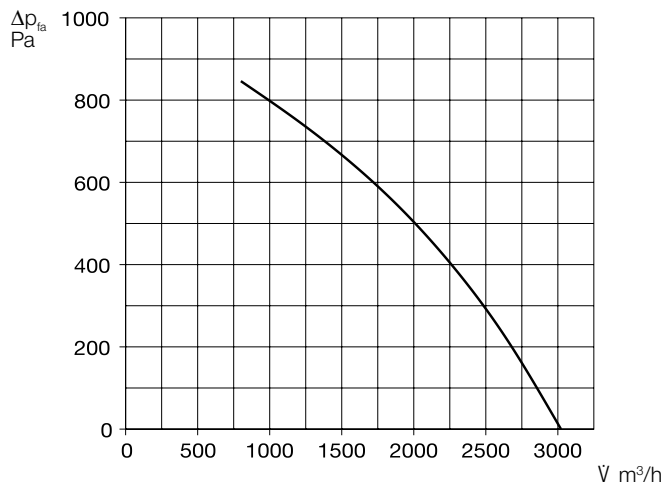

**Included in delivery:**

**Surface comfort control element**

User-friendly control via self-explanatory graphic elements with clear text directly on the touchscreen. Control line (10 metres) included in delivery, other lengths available (ALB EC-SK, accessories).  
Dim. mm (WxHxD) 115x80x25



Control element with connection cable (10 m) included in the scope of delivery.  
Dim. mm (WxHxD) 115 x 80 x 25

**Accessories for Type Pro WW**

**Hydraulic unit**

**WHSH HE 24 V (0-10 V) No. 08318**

Controls the water temperature of the PWW heating element using a three-way valve actuator 24 V (0-10 V) and thus the heat output transferred to the air. Delivered as a complete unit, incl. VL- / RL temperature display, circulating pump and flexible connection hoses.



**Accessories for all types**

**Room sensor – Air quality**

**AIR1/KWL-VOC 0-10V** No. 20250

**AIR1/KWL-CO2 0-10V** No. 20251

**AIR1/KWL-FTF 0-10V** No. 20252

For measuring the CO<sub>2</sub>, mixed gas (VOC) concentration or relative room air humidity. A maximum of one sensor can be connected.  
Dim. mm (W x H x D) 85 x 85 x 27



**Room sensor – Temperature**

**TFR-ALB/KWL** No. 07277

For measuring the room temperature and controlling the ventilation unit according to the set value. Incl. 20 m control line. Maximum total of one sensor can be connected.  
Dim. mm (W x H x D) 80 x 80 x 25



**Transition piece – Symmetrical**

**KWL-ÜS 2600 S** No. 08341

From unit flange to round duct systems.

**Flexible connecting sleeve**


**FM 560** No. 01679

For acoustic decoupling, incl. 2 pcs. hose clamps.

**Duct shutter, motorised**

**RVM 560** No. 02583

Prevents cold draughts when the unit is at a standstill. Automatic function through fan operation, with mounted spring return motor (outside of air flow). Installation in any position.



Dimensions in mm

**Angle flange ring**

**FR 560** No. 01209

Made of galvanised steel sheet, for duct connection.

**Base cover**

**KWL-SB 2600 S** No. 09318

Made of galvanised steel sheet.



Technical data	KWL EC 2600 S			KWL EC 2600 S, with warm water post-heater		
	Type	Ref. no.		Type	Ref. no.	
<b>For floor-standing installation</b>	<b>KWL EC 2600 S Pro</b>	08331		<b>KWL EC 2600 S Pro WW</b>	08332	
<b>Flow rate at level<sup>1)</sup></b>	③	②	①	③	②	①
Supply air/extract V m³/h approx.	2500	1800	1000	2500	1800	1000
<b>Noise dB(A) at 2100 m³/h and 275 Pa</b>						
Supply air L <sub>WA</sub> (sound power)	77	75	70	77	75	70
Extract air L <sub>WA</sub> (sound power)	63	60	56	63	60	56
Radiation L <sub>PA</sub> at 1 m	51	50	45	51	50	45
Power consumption fans 2xW	674	393	204	674	393	204
Standby power consumption	< 1 W			< 1 W		
Voltage/Frequency	3N~, 400 V, 50 Hz			3N~, 400 V, 50 Hz		
Rated current A – Ventilation	2.3 / 2.3 / 2.3			2.3 / 2.3 / 2.3		
– Preheating	10.05 / 10.05 / 10.05			10.05 / 10.05 / 10.05		
– max. total	12.35 / 12.35 / 12.35			12.35 / 12.35 / 12.35		
Electric preheater kW	6.8			6.8		
Heat output/post-heating element kW	–			9.3 (at 60/40 °C) / 8.5 (at 50/40 °C) / 5.3 (at 40/30 °C)		
Summer bypass	automatic (adjustable), with heat exchanger cover			automatic (adjustable), with heat exchanger cover		
Wiring diagram no.	1370			1370		
Temperature operating range	–20 °C to +40 °C			–20 °C to +40 °C		
Installation temperature	+5 °C to +40 °C			+5 °C to +40 °C		
Connection PWW heating element	–			IG 1/2"		
Weight approx. kg	490			500		

<sup>1)</sup> Values based on operating ranges defined according to PHI (Passive House Institute).

# Relaxed ventilation with KWL® YOGA.



**Are your buildings fit for the future? Whether at school or in public buildings, at work or in leisure time – our new, decentralised ventilation units with heat recovery KWL Yoga make it easy to achieve the best indoor air quality.**

The compact design and simple installation without an air distribution system also make KWL Yoga perfect for renovation projects. Three available unit sizes for flow rates up to 400, 700 and 1000 m³/h and various equipment versions are only some of the highlights of KWL Yoga.

# All advantages at a glance:



- Practical: Simple **maintenance** through freely accessible inspection flaps on the underside of the unit.
- Flexible: Three available unit sizes for flow rates up to **400, 700 and 1000 m³/h.**
- Diverse: Ideal for use in **schools, offices and public facilities.**
- Guaranteed: **Best air quality** with low CO<sub>2</sub> concentration promotes receptiveness and performance.
- Customised: 12 different **equipment options.**
- Types "ET" are equipped with highly efficient **enthalpy heat exchanger.**

#### ■ KWL Yoga Style

Compact wall units from  
400 to 1000 m³/h.



62ff

## KWL YOGA Style 400



Decentralised compact ventilation units with heat recovery for the supply and extract ventilation of individual rooms, such as classrooms, recreation rooms, offices, commercial units, medical practices and many more. Equipped with highly-efficient aluminium heat exchangers and energy-saving EC motors. Automatic shutters for intake and exhaust prevent cold draughts when the fans are deactivated. The flow-optimised supply air grille allows draught-free ventilation, even in large rooms, through the optimal use of the Coanda effect. Includes a touch control element for easy operation and configuration of unit functions.

#### ■ Casing

Made of galvanised steel sheet, the casing parts are painted white/powder-coated. The double-walled unit casing is equipped with 40 mm thermal and sound insulation on all sides. Easy installation and maintenance due to large inspection panel.


#### ■ Installation

Ceiling installation is carried out using the vibration-damping fastening elements included in the scope of delivery.

#### ■ Heat exchanger

Large aluminium cross counterflow heat exchanger with up to 90 % heat recovery efficiency. Dismantling is possible in a few steps. Types "ET" are equipped with highly efficient enthalpy heat exchanger for additional humidity recovery of up to 50%.

## Performance curve KWL YOGA Style 400

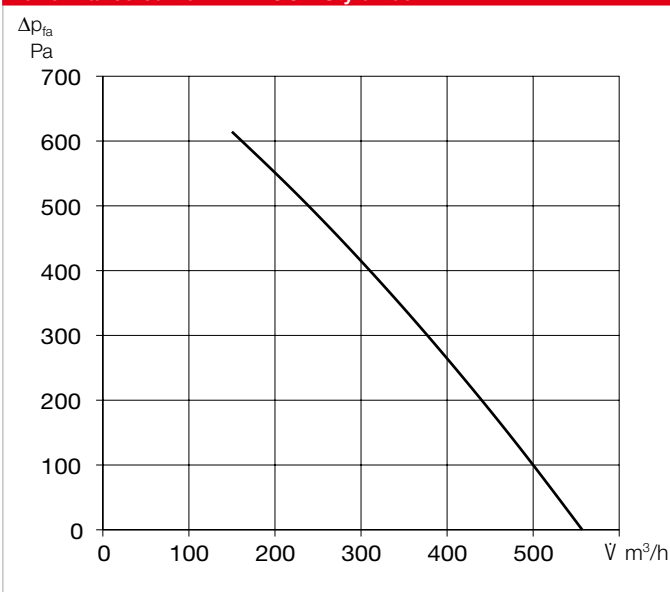

#### ■ Fans

Two low-noise, high-performance EC fans with backward curved impellers for maximum energy efficiency.

#### ■ Sensor system

Integrated CO<sub>2</sub> sensor system. Alternatively, this can be replaced by an external sensor (VOC, CO<sub>2</sub> or humidity) positioned in the room. KWL Yoga can also be controlled with a motion sensor (combination not possible!) instead of the sensors.

#### ■ Air flow

Supply air on front side, two extract air openings on the underside of the unit. Intake and exhaust air connectors are equipped with spring-loaded shutters.

#### ■ Condensate connection

Condensate connection horizontal (wall side), optionally via ball siphon in surface-mounted or flush-mounted design or via condensate pump.

#### ■ Air filter, VDI-certified


Clean intake air flow via ISO ePM<sub>1</sub> 60 % filter (F7). Two filters for extract air: ISO Coarse 60 % (G4); optionally available: ISO ePM<sub>10</sub> 60 % (M5).

#### ■ Summer operation

Equipped with automatic bypass function (bypassing the heat exchanger to use the cool night air for controlling the room temperature) as standard.

	Without electrical preheater/ without electrical after-heater	Without electrical preheater/ with electrical after-heater	Without electrical preheater/ with warm water after-heater	With electrical preheater/ without after-heater	With electrical preheater/with electrical after-heater	
	<b>KWL YOGA Style 400</b> Ref. no. 40008	<b>KWL YOGA Style 400 EN</b> Ref. no. 40010	<b>KWL YOGA Style 400 WW</b> Ref. no. 40012	<b>KWL YOGA Style 400 EV</b> Ref. no. 40014	<b>KWL YOGA Style 400 EV/EN</b> Ref. no. 40016	
	<b>KWL YOGA Style 400 ET</b> Ref. no. 40667	<b>KWL YOGA Style 400 EN ET</b> Ref. no. 40668	<b>KWL YOGA Style 400 WW ET</b> Ref. no. 40669	<b>KWL YOGA Style 400 EV ET</b> Ref. no. 40670	<b>KWL YOGA Style 400 EV/EN ET</b> Ref. no. 40671	
Intake/exhaust air connector diameter	250	250	250	250	250	
Air volume V m³/h (Min. - Max.)	200 - 600	200 - 600	200 - 600	200 - 600	200 - 600	
Radiation L <sub>pa</sub> dB(A) in 1 m / 3 m (at 0 Pa)						
– 150 m³/h	26 / 20	26 / 20	26 / 20	26 / 20	26 / 20	
– 200 m³/h	28 / 22	28 / 22	28 / 22	28 / 22	28 / 22	
– 300 m³/h	31 / 25	31 / 25	31 / 25	31 / 25	31 / 25	
– 560 m³/h	38 / 32	38 / 32	38 / 32	38 / 32	38 / 32	
Maximum power consumption total (incl. control) W	350	1850	350	1850	3350	
Rated current total (incl. control) A	2.45	9.0	2.45	9.0	15.51	
Voltage / frequency	1~, 230 V, 50 Hz	1~, 230 V, 50 Hz	1~, 230 V, 50 Hz	1~, 230 V, 50 Hz	1~, 230 V, 50 Hz	
Protection category IP	20	20	20	20	20	
Temperature operating range °C	-10 to +40	-10 to +40	-10 to +40	-20 to +40	-20 to +40	
Installation temperature °C	+5 to +40	+5 to +40	+5 to +40	+5 to +40	+5 to +40	
Weight approx. kg	167	169	169	169	171	
Wiring diagram no.	1500	1500	1500	1500	1500	

### Dimensions KWL YOGA Style 400

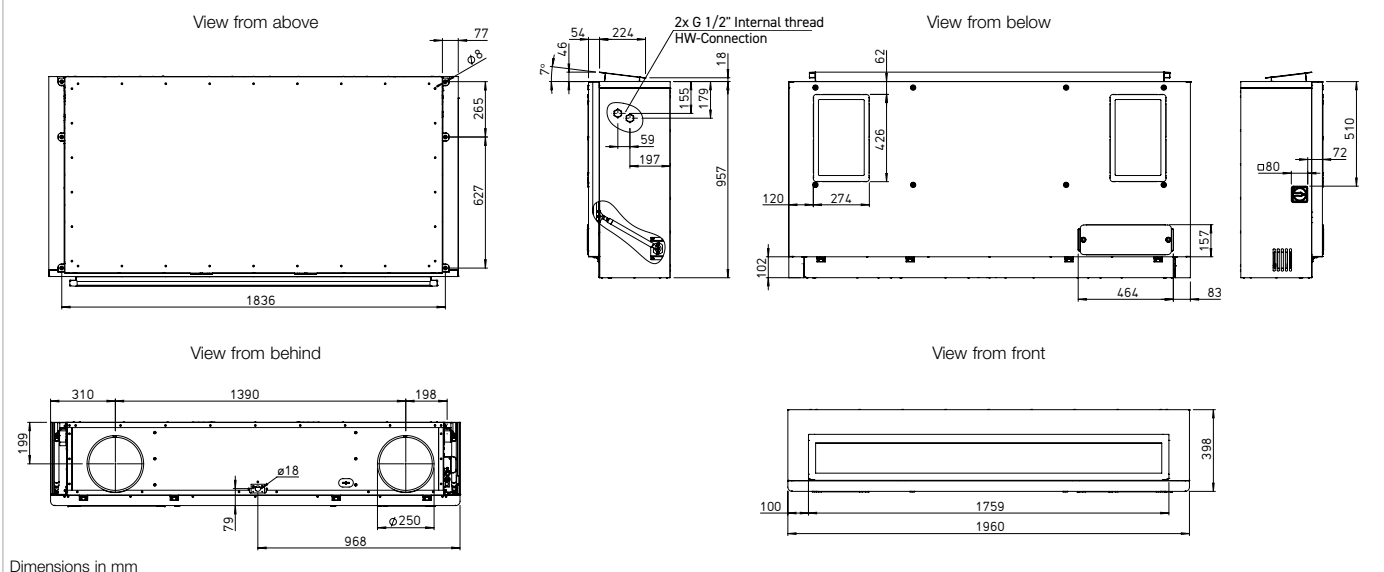

#### Heat exchanger frost protection

The standard frost monitoring automatically regulates the supply air flow and the built-in electrical preheater, depending on the selected equipment.

#### After-heater

Unit variants with integrated post-heating (warm water or electrical after-heater) ensure the comfortable and energy-efficient post-heating of supply air. The target supply air temperature is set on the control element. The use of hydraulic unit type WHSH HE 24 V (0-10V), (accessories) is recommended for controlling the warm water heating element.

#### Power control

The included comfort control element with touch functionality and easy menu navigation provide the following functions:

- ☐ Demand-oriented ventilation, optionally with CO<sub>2</sub>, VOC, or humidity sensor (1 sensor can be connected).
- ☐ Initial commissioning (automatic determination of system characteristic curve).
- ☐ Fire alarm contact connection.
- ☐ Weekly or daily programme.
- ☐ Automatic bypass (summer operation: use of cool night air).
- ☐ Pressure monitoring of filter contamination.
- ☐ Displays required filter replacement.
- ☐ 5 password-protected function levels can be configured.
- ☐ Control via central building control system possible (ModBus RTU and ModBus TCP, BACnet).
- ☐ Including control line cable (10 m)

#### Electrical connection

After removing the left side panel, the connection box is easily accessible on the outside of the casing. The isolator/main switch is located on the outside of the unit for easy maintenance. It can be locked using a padlock to prevent unauthorised access.

#### Sensors

Infrared motion sensor for detecting the presence of people in the room.

**BWM** Ref. no. 08323

**CO<sub>2</sub> sensor** for measuring the CO<sub>2</sub> concentration.

**AIR1/KWL-VOC 0-10V** No. 20250

**VOC sensor** for measuring the mixed gas concentration (VOC).

**AIR1/KWL-CO2 0-10V** No. 20251

**Humidity-temperature sensor** for measuring the relative air humidity.

**AIR1/KWL-FTF 0-10V** No. 20252

#### Control line cable

**ALB EC-SK 20 20m** No. 06816

**ALB EC-SK 40 40m** No. 06817

8-pin AWG24 twisted pair cable for the control element.

#### Installation accessories

##### Flush-mounted/wall-mounted siphon

**KWL-KS WE** Ref. no. 40064

##### Ball-tube siphon

**KWL-KS** Ref. no. 40065

##### Condensate submersible pump

**KWL-KP-I** Ref. no. 40472

##### Hydraulic unit

**WHSH HE 24V (0-10V)** No. 08318

##### Facade grille, circular

**FGR 250** Ref. no. 40181

#### Filter, VDI-certified

##### Spare air filter (extract air)\*

ISO Coarse 60% (G4). Unit = 1 pc.

**ELF-KWL YOGA 400/VDI/Coarse 60%**

Ref. no. 40687

##### Spare air filter (extract air)\*

ISO ePM<sub>10</sub> 60% (M5). Unit = 1 pc.

**ELF-KWL YOGA 400/VDI/ePM10 60%**

Ref. no. 40690

##### Spare air filter (intake air)

ISO ePM<sub>1</sub> 60% (F7). Unit = 1 pc.

**ELF-KWL YOGA 400/VDI/ePM1 60%**

Ref. no. 40693

\*2 extract air filters are required per unit.

**Attention:** For spare air filters of older unit generations (orders before March 2023): Please contact us at [export@heliosventilatoren.de](mailto:export@heliosventilatoren.de)

With electrical preheater/ with warm water after-heater
<b>KWL YOGA Style 400 EV/WW</b> Ref. no. 40018
<b>KWL YOGA Style 400 EV/WW ET</b> Ref. no. 40672
250
200 - 600
26 / 20
28 / 22
31 / 25
38 / 32
1850
9.0
1~, 230 V, 50 Hz
20
-20 to+40
+5 to+40
171
1500

#### Important note

Further information on accessories can be found on page 68.

## KWL YOGA Style 700



Decentralised compact ventilation units with heat recovery for the supply and extract ventilation of individual rooms, such as classrooms, recreation rooms, offices, commercial units, medical practices and many more. Equipped with highly-efficient aluminium heat exchangers and energy-saving EC motors. Automatic shutters for intake and exhaust prevent cold draughts when the fans are deactivated. The flow-optimised supply air grille allows draught-free ventilation, even in large rooms, through the optimal use of the Coanda effect. Includes a touch control element for easy operation and configuration of unit functions.

#### ■ Casing

Made of galvanised steel sheet, the casing parts are painted white/powder-coated. The double-walled unit casing is equipped with 40 mm thermal and sound insulation on all sides. Easy installation and maintenance due to large inspection panel.


#### ■ Installation

Ceiling installation is carried out using the vibration-damping fastening elements included in the scope of delivery.

#### ■ Heat exchanger

Large aluminium cross counterflow heat exchanger with up to 90 % heat recovery efficiency. Dismantling is possible in a few steps. Types "ET" are equipped with highly efficient enthalpy heat exchanger for additional humidity recovery of up to 50%.

## Performance curve KWL YOGA Style 700

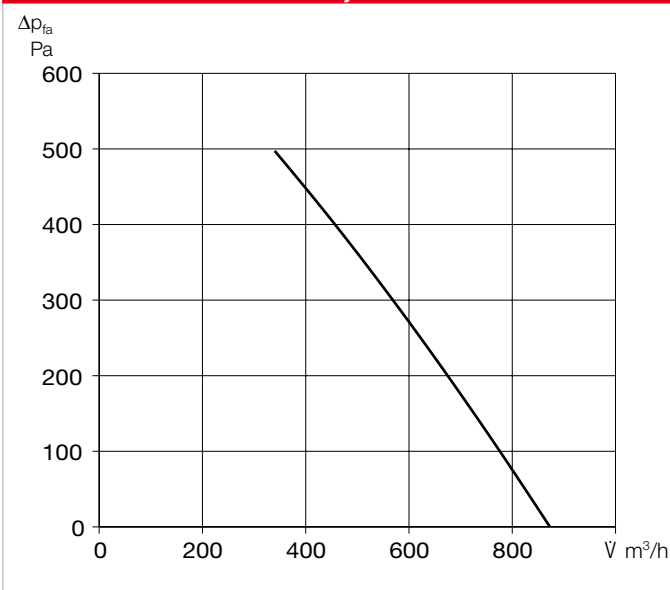

#### ■ Fans

Two low-noise, high-performance EC fans with backward curved impellers for maximum energy efficiency.

#### ■ Sensor system

Integrated CO<sub>2</sub> sensor system. Alternatively, this can be replaced by an external sensor (VOC, CO<sub>2</sub> or humidity) positioned in the room. KWL Yoga can also be controlled with a motion sensor (combination not possible!) instead of the sensors.

#### ■ Air flow

Supply air on front side, two extract air openings on the underside of the unit. Intake and exhaust air connectors are equipped with spring-loaded shutters.

#### ■ Condensate connection

Condensate connection horizontal (wall side), optionally via ball siphon in surface-mounted or flush-mounted design or via condensate pump.

#### ■ Air filter, VDI-certified


Clean intake air flow via ISO ePM<sub>1</sub> 60 % filter (F7). Two filters for extract air: ISO Coarse 60 % (G4); optionally available: ISO ePM<sub>10</sub> 60 % (M5).

#### ■ Summer operation

Equipped with automatic bypass function (bypassing the heat exchanger to use the cool night air for controlling the room temperature) as standard.

	Without electrical preheater/ without electrical after-heater	Without electrical preheater/ with electrical after-heater	Without electrical preheater/ with warm water after-heater	With electrical preheater/ without after-heater	With electrical preheater/with electrical after-heater	
	<b>KWL YOGA Style 700</b> Ref. no. 40020	<b>KWL YOGA Style 700 EN</b> Ref. no. 40022	<b>KWL YOGA Style 700 WW</b> Ref. no. 40024	<b>KWL YOGA Style 700 EV</b> Ref. no. 40026	<b>KWL YOGA Style 700 EV/EN</b> Ref. no. 40028	
	<b>KWL YOGA Style 700 ET</b> Ref. no. 40673	<b>KWL YOGA Style 700 EN ET</b> Ref. no. 40674	<b>KWL YOGA Style 700 WW ET</b> Ref. no. 40675	<b>KWL YOGA Style 700 EV ET</b> Ref. no. 40676	<b>KWL YOGA Style 700 EV/EN ET</b> Ref. no. 40677	
Intake/exhaust air connector diameter	315	315	315	315	315	
Air volume V m³/h (Min. - Max.)	300 - 900	300 - 900	300 - 900	300 - 900	300 - 900	
Radiation L <sub>pa</sub> dB(A) in 1 m / 3 m (at 0 Pa)						
– 340 m³/h	23 / 17	23 / 17	23 / 17	23 / 17	23 / 17	
– 500 m³/h	28 / 22	28 / 22	28 / 22	28 / 22	28 / 22	
– 700 m³/h	33 / 27	33 / 27	33 / 27	33 / 27	33 / 27	
– 870 m³/h	35 / 29	35 / 29	35 / 29	35 / 29	35 / 29	
Maximum power consumption total (incl. control) W	350	2600	350	2350	4600	
Rated current total (incl. control) A	2.45	12.3	2.45	11.2	9.8	
Voltage / frequency	1~, 230 V, 50 Hz	1~, 230 V, 50 Hz	1~, 230 V, 50 Hz	1~, 230 V, 50 Hz	3~, 400 V, 50 Hz	
Protection category IP	20	20	20	20	20	
Temperature operating range °C	-10 to +40	-10 to +40	-10 to +40	-20 to +40	-20 to +40	
Installation temperature °C	+5 to +40	+5 to +40	+5 to +40	+5 to +40	+5 to +40	
Weight approx. kg	200	202	202	202	204	
Wiring diagram no.	1500	1500	1500	1500	1500	

### Dimensions KWL YOGA Style 700

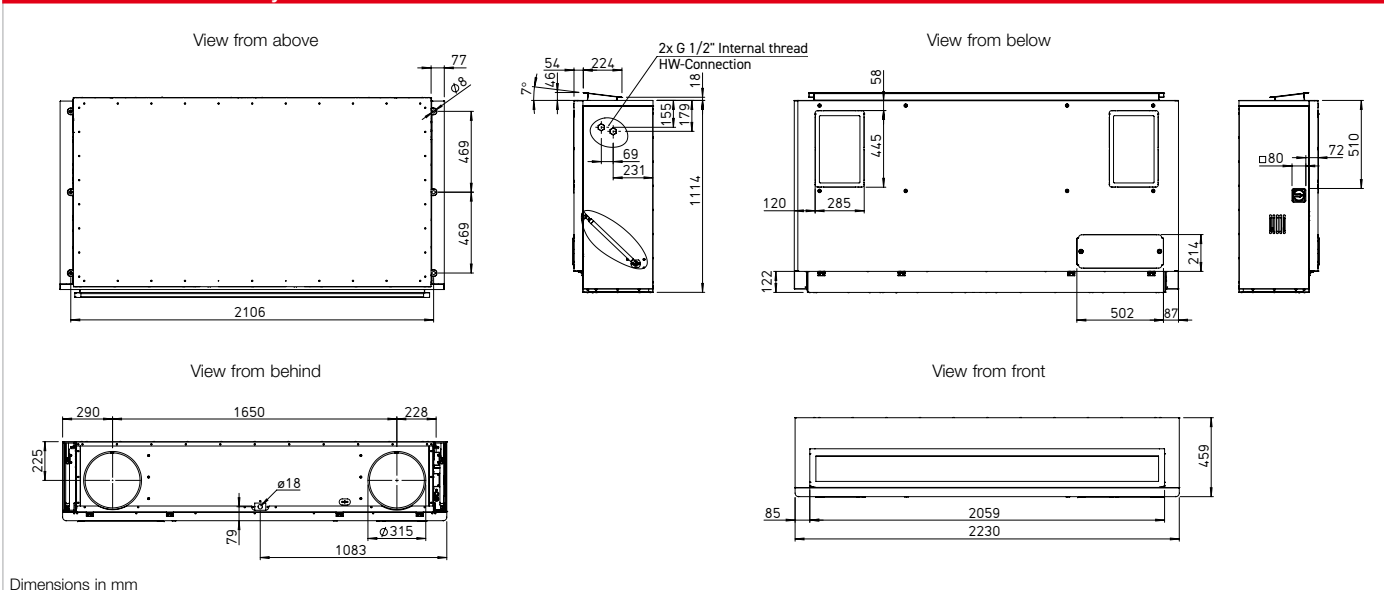

#### Heat exchanger frost protection

The standard frost monitoring automatically regulates the supply air flow and the built-in electrical preheater, depending on the selected equipment.

#### After-heater

Unit variants with integrated post-heating (warm water or electrical after-heater) ensure the comfortable and energy-efficient post-heating of supply air. The target supply air temperature is set on the control element. The use of hydraulic unit type WHSH HE 24 V (0-10V), (accessories) is recommended for controlling the warm water heating element.

#### Power control

The included comfort control element with touch functionality and easy menu navigation provide the following functions:

- ☐ Demand-oriented ventilation, optionally with CO<sub>2</sub>, VOC, or humidity sensor (1 sensor can be connected).
- ☐ Initial commissioning (automatic determination of system characteristic curve).
- ☐ Fire alarm contact connection.
- ☐ Weekly or daily programme.
- ☐ Automatic bypass (summer operation: use of cool night air).
- ☐ Pressure monitoring of filter contamination.
- ☐ Displays required filter replacement.
- ☐ 5 password-protected function levels can be configured.
- ☐ Control via central building control system possible (ModBus RTU and ModBus TCP, BACnet)
- ☐ Including control line cable (10 m)

#### Electrical connection

After removing the left side panel, the connection box is easily accessible on the outside of the casing. The isolator/main switch is located on the outside of the unit for easy maintenance. It can be locked using a padlock to prevent unauthorised access.

#### Sensors

**Infrared motion sensor** for detecting the presence of people in the room.

**BWM** Ref. no. 08323

**CO<sub>2</sub> sensor** for measuring the CO<sub>2</sub> concentration.

**AIR1/KWL-VOC 0-10V** No. 20250

**VOC sensor** for measuring the mixed gas concentration (VOC).

**AIR1/KWL-CO2 0-10V** No. 20251

**Humidity-temperature sensor** for measuring the relative air humidity.

**AIR1/KWL-FTF 0-10V** No. 20252

#### Control line cable

**ALB EC-SK 20 20m** No. 06816

**ALB EC-SK 40 40m** No. 06817

8-pin AWG24 twisted pair cable for the control element.

#### Installation accessories

##### Flush-mounted/wall-mounted siphon

**KWL-KS WE** Ref. no. 40064

##### Ball-tube siphon

**KWL-KS** Ref. no. 40065

##### Condensate submersible pump

**KWL-KP-I** Ref. no. 40472

##### Hydraulic unit

**WHSH HE 24V (0-10V)** No. 08318

##### Facade grille, circular

**FGR 315** Ref. no. 40182

#### Filter, VDI-certified

##### Spare air filter (extract air)\*

ISO Coarse 60% (G4). Unit = 1 pc.

**ELF-KWL YOGA 700/VDI/Coarse 60%**

Ref. no. 40688

##### Spare air filter (extract air)\*

ISO ePM<sub>10</sub> 60% (M5). Unit = 1 pc.

**ELF-KWL YOGA 700/VDI/ePM10 60%**

Ref. no. 40691

##### Spare air filter (intake air)

ISO ePM<sub>1</sub> 60% (F7). Unit = 1 pc.

**ELF-KWL YOGA 700/VDI/ePM1 60%**

Ref. no. 40694

\*2 extract air filters are required per unit.

**Attention:** For spare air filters of older unit generations (orders before March 2023): Please contact us at [export@heliosventilatoren.de](mailto:export@heliosventilatoren.de)

With electrical preheater/ with warm water after-heater
<b>KWL YOGA Style 700 EV/WW</b> Ref. no. 40030
<b>KWL YOGA Style 700 EV/WW ET</b> Ref. no. 40678
315
300 - 900
23 / 17
28 / 22
33 / 27
35 / 29
2350
11.2
1~, 230 V, 50 Hz
20
-20 to +40
+5 to +40
204
1500

#### Important note

Further information on accessories can be found on page 68.

## KWL YOGA Style 1000



**Decentralised compact ventilation units with heat recovery for the supply and extract ventilation of individual rooms, such as classrooms, recreation rooms, offices, commercial units, medical practices and many more. Equipped with highly-efficient aluminium heat exchangers and energy-saving EC motors. Automatic shutters for intake and exhaust prevent cold draughts when the fans are deactivated. The flow-optimised supply air grille allows draught-free ventilation, even in large rooms, through the optimal use of the Coanda effect. Includes a touch control element for easy operation and configuration of unit functions.**

### ■ Casing

Made of galvanised steel sheet, the casing parts are painted white/powder-coated. The double-walled unit casing is equipped with 40 mm thermal and sound insulation on all sides. Easy installation and maintenance due to large inspection panel.


### ■ Installation

Ceiling installation is carried out using the vibration-damping fastening elements included in the scope of delivery.

### ■ Heat exchanger

Large aluminium cross counterflow heat exchanger with up to 90 % heat recovery efficiency. Dismantling is possible in a few steps. Types "ET" are equipped with highly efficient enthalpy heat exchanger for additional humidity recovery of up to 50%.

## Performance curve KWL YOGA Style 1000

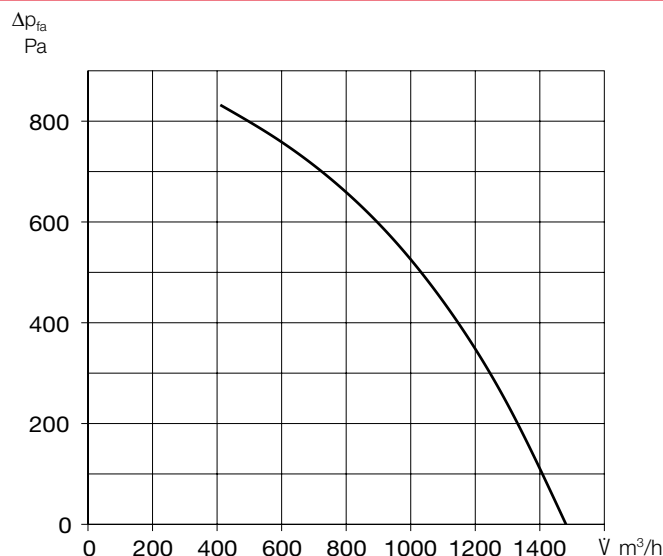

### ■ Fans

Two low-noise, high-performance EC fans with backward curved impellers for maximum energy efficiency.

### ■ Sensor system

Integrated CO<sub>2</sub> sensor system. Alternatively, this can be replaced by an external sensor (VOC, CO<sub>2</sub> or humidity) positioned in the room. KWL Yoga can also be controlled with a motion sensor (combination not possible!) instead of the sensors.

### ■ Air flow

Supply air on front side, two extract air openings on the underside of the unit. Intake and exhaust air connectors are equipped with spring-loaded shutters.

### ■ Condensate connection

Condensate connection horizontal (wall side), optionally via ball siphon in surface-mounted or flush-mounted design or via condensate pump.

### ■ Air filter, VDI-certified


Clean intake air flow via ISO ePM<sub>1</sub> 60 % filter (F7). Two filters for extract air: ISO Coarse 60 % (G4); optionally available: ISO ePM<sub>10</sub> 60 % (M5).

### ■ Summer operation

Equipped with automatic bypass function (bypassing the heat exchanger to use the cool night air for controlling the room temperature) as standard.

	Without electrical preheater/ without electrical after-heater	Without electrical preheater/ with electrical after-heater	Without electrical preheater/ with warm water after-heater	With electrical preheater/ without after-heater	With electrical preheater/ with electrical after-heater	
	<b>KWL YOGA Style 1000</b> Ref. no. 40032	<b>KWL YOGA Style 1000 EN</b> Ref. no. 40034	<b>KWL YOGA Style 1000 WW</b> Ref. no. 40036	<b>KWL YOGA Style 1000 EV</b> Ref. no. 40203	<b>KWL YOGA Style 1000 EV/EN</b> Ref. no. 40040	
	<b>KWL YOGA Style 1000 ET</b> Ref. no. 40679	<b>KWL YOGA Style 1000 EN ET</b> Ref. no. 40680	<b>KWL YOGA Style 1000 WW ET</b> Ref. no. 40681	<b>KWL YOGA Style 1000 EV ET</b> Ref. no. 40682	<b>KWL YOGA Style 1000 EV/EN ET</b> Ref. no. 40683	
Intake/exhaust air connector diameter	315	315	315	315	315	
Air volume V m³/h (Min. - Max.)	500 - 1400	500 - 1400	500 - 1400	500 - 1400	500 - 1400	
Radiation L <sub>pa</sub> dB(A) in 1 m / 3 m (at 0 Pa)						
– 410 m³/h	24 / 18	24 / 18	24 / 18	24 / 18	24 / 18	
– 800 m³/h	30 / 24	30 / 24	30 / 24	30 / 24	30 / 24	
– 1000 m³/h	34 / 28	34 / 28	34 / 28	34 / 28	34 / 28	
– 1480 m³/h	42 / 36	42 / 36	42 / 36	42 / 36	42 / 36	
Maximum power consumption total (incl. control) W	900	3900	900	2900	6900	
Rated current total (incl. control) A	4.0	8.3	4.0	12.7	12.7	
Voltage / frequency	1~, 230 V, 50 Hz	3~, 400 V, 50 Hz	1~, 230 V, 50 Hz	1~, 230 V, 50 Hz	3~, 400 V, 50 Hz	
Protection category IP	20	20	20	20	20	
Temperature operating range °C	-10 to +40	-10 to +40	-10 to +40	-17 to +40	-20 to +40	
Installation temperature °C	+5 to +40	+5 to +40	+5 to +40	+5 to +40	+5 to +40	
Weight approx. kg	267	270	270	270	273	
Wiring diagram no.	1500	1500	1500	1500	1500	

### Dimensions KWL YOGA Style 1000

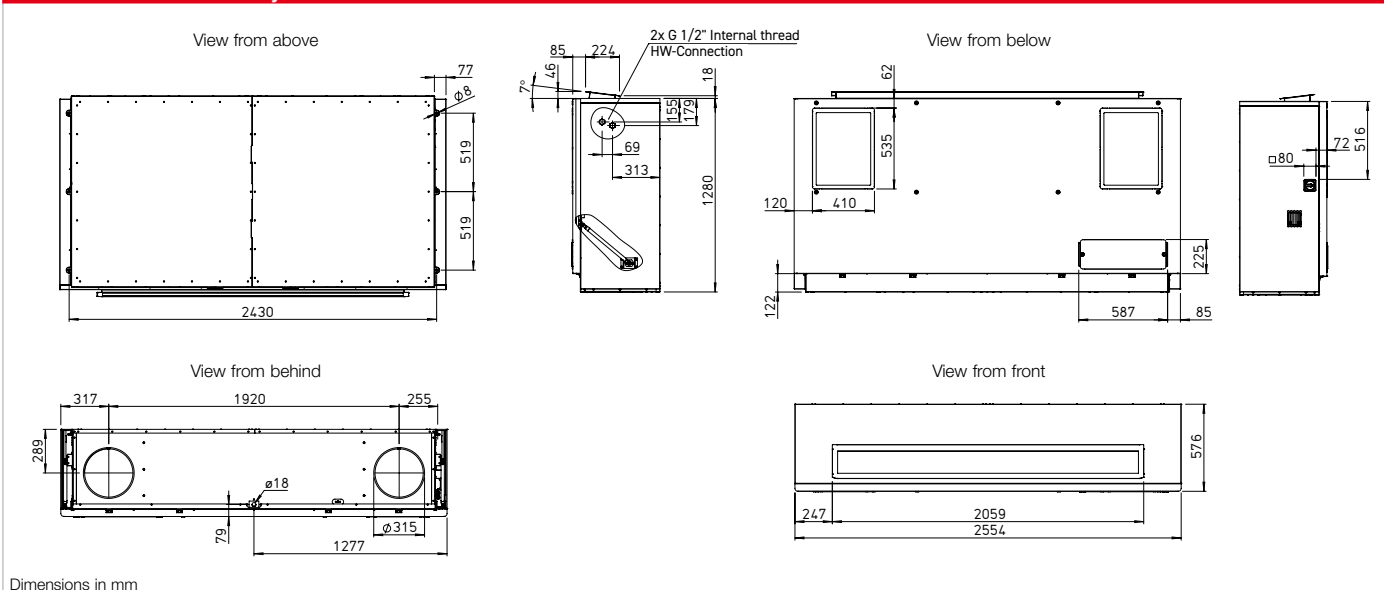

#### Heat exchanger frost protection

The standard frost monitoring automatically regulates the supply air flow and the built-in electrical preheater, depending on the selected equipment.

#### After-heater

Unit variants with integrated post-heating (warm water or electrical after-heater) ensure the comfortable and energy-efficient post-heating of supply air. The target supply air temperature is set on the control element. The use of hydraulic unit type WHSH HE 24 V (0-10V), (accessories) is recommended for controlling the warm water heating element.

#### Power control

The included comfort control element with touch functionality and easy menu navigation provide the following functions:

- ☐ Demand-oriented ventilation, optionally with CO<sub>2</sub>, VOC, or humidity sensor (1 sensor can be connected).
- ☐ Initial commissioning (automatic determination of system characteristic curve).
- ☐ Fire alarm contact connection.
- ☐ Weekly or daily programme.
- ☐ Automatic bypass (summer operation: use of cool night air).
- ☐ Pressure monitoring of filter contamination.
- ☐ Displays required filter replacement.
- ☐ 5 password-protected function levels can be configured.
- ☐ Control via central building control system possible (ModBus RTU and ModBus TCP, BACnet)
- ☐ Including control line cable (10 m)

#### Electrical connection

After removing the left side panel, the connection box is easily accessible on the outside of the casing. The isolator/main switch is located on the outside of the unit for easy maintenance. It can be locked using a padlock to prevent unauthorised access.

#### Sensors

**Infrared motion sensor** for detecting the presence of people in the room.

**BWM** Ref. no. 08323

**CO<sub>2</sub> sensor** for measuring the CO<sub>2</sub> concentration.

**AIR1/KWL-VOC 0-10V** No. 20250

**VOC sensor** for measuring the mixed gas concentration (VOC).

**AIR1/KWL-CO<sub>2</sub> 0-10V** No. 20251

**Humidity-temperature sensor** for measuring the relative air humidity.

**AIR1/KWL-FTF 0-10V** No. 20252

#### Control line cable

**ALB EC-SK 20 20m** No. 06816

**ALB EC-SK 40 40m** No. 06817

8-pin AWG24 twisted pair cable for the control element.

#### Installation accessories

##### Flush-mounted/wall-mounted siphon

**KWL-KS WE** Ref. no. 40064

##### Ball-tube siphon

**KWL-KS** Ref. no. 40065

##### Condensate submersible pump

**KWL-KP-I** Ref. no. 40472

##### Hydraulic unit

**WHSH HE 24V (0-10V)** No. 08318

##### Facade grille, circular

**FGR 315** Ref. no. 40182

#### Filter, VDI-certified

##### Spare air filter (extract air)\*

ISO Coarse 60% (G4). Unit = 1 pc.

**ELF-KWL YOGA 1000/VDI/Coarse 60%**

Ref. no. 40689

##### Spare air filter (extract air)\*

ISO ePM<sub>10</sub> 60% (M5). Unit = 1 pc.

**ELF-KWL YOGA 1000/VDI/ePM10 60%**

Ref. no. 40692

##### Spare air filter (intake air)

ISO ePM<sub>1</sub> 60% (F7). Unit = 1 pc.

**ELF-KWL YOGA 1000/VDI/ePM1 60%**

Ref. no. 40695

\*2 extract air filters are required per unit.

**Attention:** For spare air filters of older unit generations (orders before March 2023): Please contact us at [export@heliosventilatoren.de](mailto:export@heliosventilatoren.de)

With electrical preheater/ with warm water after-heater
<b>KWL YOGA Style 1000 EV/WW</b> Ref. no. 40205
<b>KWL YOGA Style 1000 EV/WW ET</b> Ref. no. 40684
315
500 - 1400
24 / 18
30 / 24
34 / 28
42 / 36
2900
12.7
1~, 230 V, 50 Hz
20
-17 to +40
+5 to +40
273
1500

#### Important note

Further information on accessories can be found on page 68.

KWL-KS WE



■ Flush-mounted/wall-mounted siphon

Flush-mounted condensate siphon for ventilation units, for odourless discharge of condensate in the sewage system. Desiccation-safe and cleanable by removing siphon cartridge. Incl. plug-in seal (rubber) for Ø 20 – 32 mm. Vertical outlet connector DN32. Structural protection can be cut to installation depth. Incl. odour barrier, pursuant to EN 681, DIN 19541.

Technical data	KWL-KS WE Ref. no. 40064
Material	Polypropylene (PP) and ABS
Drainage capacity l/s	0.15
Min. - max. duct length (feed) in m	0.2 – 3.5
Minimum installation depth in mm	60
Condensate line connection	External Ø 20 – 32 mm / Internal Ø 18 mm
Dimensions (L x W x H) in mm	110 x 110 x 60
Weight approx. kg	0.25

KWL-KS



■ Ball-tube siphon

Ball-tube siphon for ventilation units, for odourless discharge of condensate in the sewage system. Desiccation-safe. Incl. plug-in seal (rubber) for Ø 9 – 29 mm. Horizontal outlet connector DN40.

Technical data	KWL-KS Ref. no. 40065
Material	Polypropylene (PP)
Drainage capacity l/s	0.6
Drain connection	DN40

KWL-KP-I



■ Condensate submersible pump

Condensate pump for unit-integrated use in ventilation units, if the condensate connection with a downward slope to a waste water pipe is not possible. The submersible pump is placed directly in the condensate pan. The maximum flow rate is 12 l/h at 0 m delivery height. 9 l/h at 5 m delivery head. Protection class: IP68. Incl. alarm circuit.

KWL-KP-I	Ref. no. 40472
----------	----------------

WHSHE 24 V (0-10V)



■ Hydraulic unit

Controls the water temperature of the PWW heater element by means of three point valve actuator 24 V (0-10 V) and thus the thermal output which is conveyed to the air. Delivered as complete unit, incl. flow/return temperature display, circulation pump and flexible connecting pipes.

WHSHE 24V (0-10V)	Ref. no. 08318
-------------------	----------------

ALB EC-SK



■ Control line cable

ALB EC-SK 20 20m	Ref. no. 06816
ALB EC-SK 40 40m	Ref. no. 06817

8-pin AWG24 twisted pair cable for the control element.

### AIR1/KWL-VOC 0-10V / -CO<sub>2</sub> 0-10V / -FTF 0-10V



#### ■ Room sensor

For measuring the CO<sub>2</sub>, mixed gas (VOC) concentration or relative humidity. Dim. mm (W x H x D) 85 x 85 x 27

**VOC sensor** for measuring the mixed gas concentration (VOC).

**AIR1/KWL-VOC 0-10V** Ref. no. 20250

**CO<sub>2</sub> sensor** for measuring the CO<sub>2</sub> concentration.

**AIR1/KWL-CO<sub>2</sub> 0-10V** Ref. no. 20251

**Humidity-temperature sensor** for measuring the relative air humidity.

**AIR1/KWL-FTF 0-10V** Ref. no. 20252

### BWM



#### ■ Infrared motion sensor

Motion sensor for detecting the presence of people in the room. Wall installation (surface mounted) (cable entry at top or bottom) or installation in flush-mounted box Ø 55 mm (cable entry at back).

Technical data	BWM Ref. no. 08323
Material casing	ABS plastic, white (similar RAL 9010)
Protection class	III
Protection category	IP30
Electrical connection	0.14 – 1.5 mm <sup>2</sup> (screw terminals)
Dimensions in mm (W x H x D)	85 x 85 x 27

### FGR



#### ■ Facade grille, circular

For flush covering of ventilation openings on the facade. Can be used for circular outdoor and exhaust air ducts. Two holes in the pipe spigot allow secure fastening with screws, to be provided by customer.

Solid aluminium construction. Fixed blades with stainless steel wire mesh behind, mesh size 10 x 10 mm.

**FGR 250** Ref. no. 40181

**FGR 315** Ref. no. 40182

### ELF-KWL YOGA



Intake air filter

Extract air filter\*

#### ■ Filter, VDI-certified

**Spare air filter (extract air)\*** ISO Coarse 60% (G4). Unit = 1 pc.

**ELF-KWL YOGA 400/VDI/Coarse 60%** Ref. no. 40687

**ELF-KWL YOGA 700/VDI/Coarse 60%** Ref. no. 40688

**ELF-KWL YOGA 1000/VDI/Coarse 60%** Ref. no. 40689

**Spare air filter (extract air)\*** ISO ePM<sub>10</sub> 60% (M5). Unit = 1 pc.

**ELF-KWL YOGA 400/VDI/ePM10 60%** Ref. no. 40690

**ELF-KWL YOGA 700/VDI/ePM10 60%** Ref. no. 40691

**ELF-KWL YOGA 1000/VDI/ePM10 60%** Ref. no. 40692

**Spare air filter (intake air)** ISO ePM<sub>1</sub> 60% (F7). Unit = 1 pc.

**ELF-KWL YOGA 400/VDI/ePM1 60%** Ref. no. 40693


**ELF-KWL YOGA 700/VDI/ePM1 60%** Ref. no. 40694

**ELF-KWL YOGA 1000/VDI/ePM1 60%** Ref. no. 40695

\* 2 extract air filters are required per unit.

**Attention:** For spare air filters of older unit generations (orders before March 2023): Please contact us at [export@heliosventilatoren.de](mailto:export@heliosventilatoren.de)

# Everything from one source. For the perfect functioning of the KWL® system.

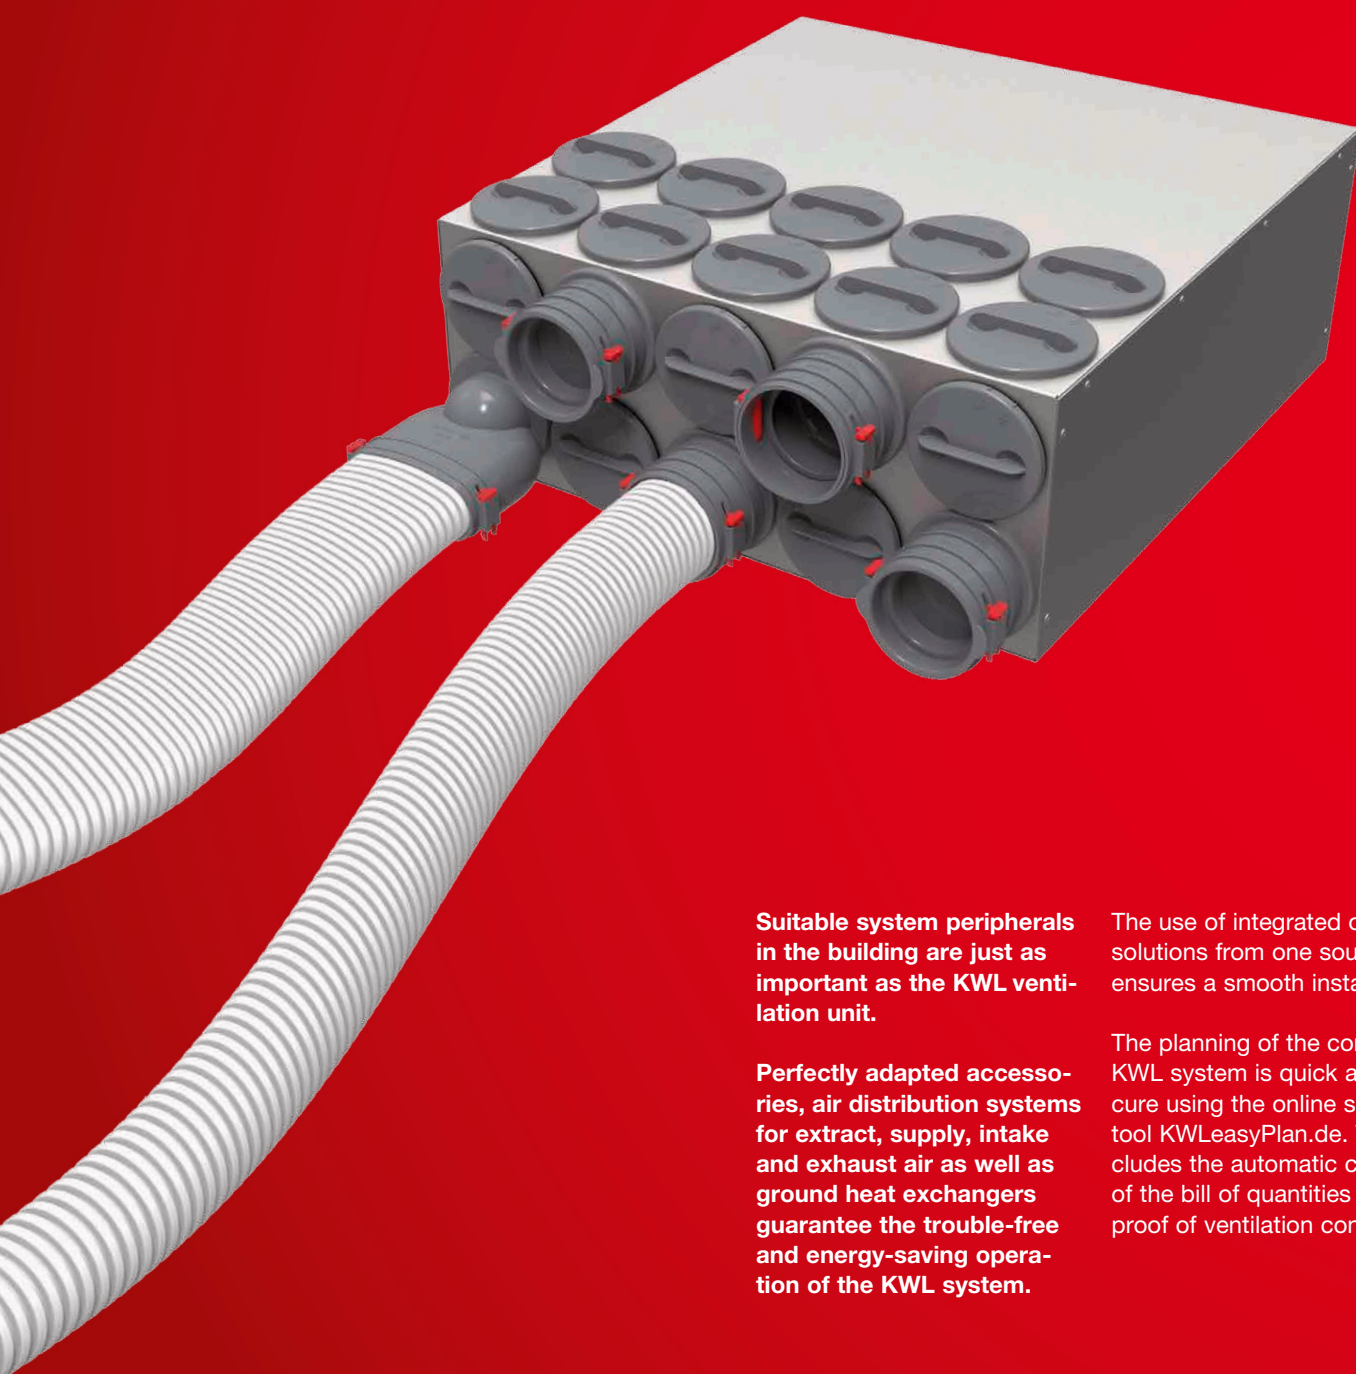

**Suitable system peripherals in the building are just as important as the KWL ventilation unit.**

**Perfectly adapted accessories, air distribution systems for extract, supply, intake and exhaust air as well as ground heat exchangers guarantee the trouble-free and energy-saving operation of the KWL system.**

The use of integrated overall solutions from one source ensures a smooth installation.

The planning of the complete KWL system is quick and secure using the online software tool [KWLeasyPlan.de](http://KWLeasyPlan.de). This includes the automatic creation of the bill of quantities and proof of ventilation concept.

#### ■ Flexible duct system FlexPipe

The right solution for every type of installation. FlexPipe<sup>plus</sup> combines the proven round duct concept with oval components.

This makes the planning and installation of complete ventilation systems with heat recovery much easier and DIN-compliant.

FlexPipe<sup>plus</sup> provides the greatest possible flexibility with low parts diversity.

72ff

#### ■ Duct system IsoPipe and air distribution system RenoPipe

**IsoPipe** is the practical alternative to spiral duct installation with subsequent thermal insulation. Since it is already fully insulated, IsoPipe is ideally suitable for intake air and exhaust air ducting as well as supply air and extract air ducting in basements or low-temperature zones.

**RenoPipe** is the perfect solution for energy-saving renovations and it is simply surface-mounted to the ceiling or wall.

84ff

#### ■ KWL MultiZoneBox

When combined with a central building KWL unit from Helios, the MultiZoneBox ensures demand-oriented ventilation in multi-floor buildings.

Supply/extract air-side volume flow control, sound insulation, air distribution and intelligent system control – the KWL MultiZoneBox combines all seven components in one unit.

80f

#### ■ KWL HygroBox and ground heat exchanger

As an active humidification unit, the **HygroBox** ensures a health room air humidity throughout the year and prevents expensive damage to furniture, floor coverings, etc.

Optional **ground-to-brine or ground-to-air heat exchangers** guarantee that the intake air is always energy-optimised when it flows into the ventilation unit. This saves even more energy in winter and results in intake air temperature reduction in summer.

92ff

#### ■ Accessories

90f

**flexpipe®plus round and oval ducting system. Arbitrarily combinable.**


**flexpipe®plus is the further development of the successful flexpipe air distribution system and it combines round and oval ducts in one smart system package with all conceivable round-oval combinations.**

The oval duct has the identical hydraulic cross-section and pressure loss as the round duct as well as a point-symmetric design.

This results in unique advantages:

- No matter if it's planning and layout or installation and adjustment or maintenance, round and oval pipe behave completely identical.
- Depending on the structural circumstances, the optional change between round and oval ducts is possible using adapters, both in line and away from the distribution box. This provides the greatest possible planning and installation freedom.

- The ideal, economical option can be selected at any time. The space-saving oval duct is mainly used if low installation heights are required.
- The round-oval compatibility results in low parts diversity. The stocking and consultation processes are greatly simplified. The installation is almost intuitive.
- The point-symmetric oval design allows installation from horizontal to vertical without the use of adapters for position correction.

**Reference**

**flexpipe round duct system with ext. Ø 63 mm, int. 52 mm**  
for volume flows up to 20 m³/h  
see page 72

**flexpipe®plus is available in two designs which can be combined as required:**

- FRS 75, round:  
External Ø: 75 mm, internal: 63 mm for volume flows up to 30 m³/h. For installation in concrete ceilings. High ring strength (STIS ≥ 10 kN/m² according to DIN EN 9969). Bending radius horizontal and vertical 150 mm.
- FRS 51, oval:  
51 x 114 mm, for volume flows up to 30 m³/h, ideal for space-saving installation e.g. on unfinished floors or in walls. Bending radius horizontal 300 mm, vertical 200 mm.

**Installation, handling, commissioning**

- Ultra-simple planning thanks to identical duct cross-sections and pressure losses.
- Quick installation due to radial, flexible endless installation from the roll.
- Construction site-compliant handling due to its low weight.
- Quick commissioning due to minimal adjustment effort.
- Uniform air distribution.
- Hygienically optimal and easy to clean.

**Duct properties and advantages**



- Special round and oval ventilation duct made of hygienically safe PE-HD new material.
- Two-layer design – externally corrugated and internally

smooth and antistatic. This minimises the pressure losses and prevents flow noises and dirt deposits.


- The extreme horizontal and vertical bending elasticity of both duct geometries minimises the number of necessary moulded parts.
- The point-symmetric design allows the installation of the oval duct from horizontal to vertical, upwards or downwards, without the use of adapters.

**Duct concept, installation**

- Mounting clips on all moulded parts for secure fixation to floors, walls or ceilings.
- Detachable mounting brackets guarantee quick, tear-proof duct fixation to all connection points.
- No additional cross talk silencer due to sound-insulating distribution box.
- Precision-fit seal system on all moulded parts for leak-free air transportation.
- Aerodynamically optimised ceiling and floor boxes as well as wall outlets are available for the use of room-side inlet and outlet elements at the duct ends. These have two parallel duct connections for delivering the volume flows required according to DIN 1946-6 with low pressure loss.

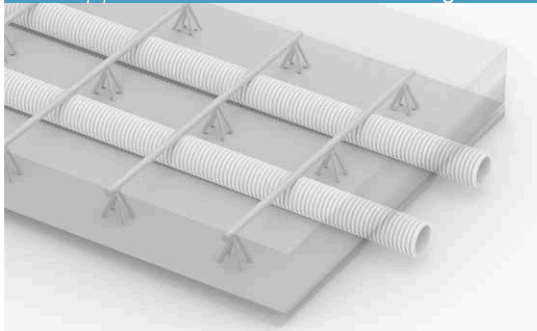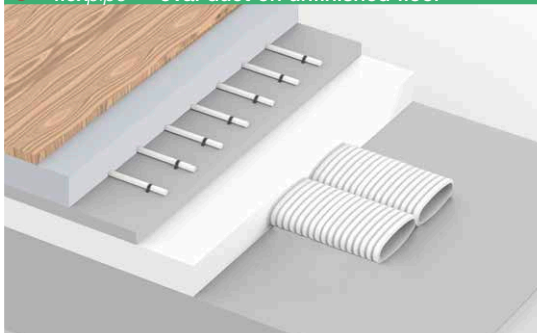**flexpipe®plus round duct in concrete ceiling**

**flexpipe®plus oval duct on unfinished floor**

**flexpipe®plus allows any round-oval combination**


### flexpipe vent. duct round ○




### flexpipe vent. duct (bundle = 50 lin. m)

Type	Ref. no.	Dim. in mm
Ø 75 mm		Ext. Ø Int. Ø
FRS-R 75 ○	02913	75 63
<b>Hygiene duct shutter cover</b>		
FRS-VD 75 ○	02915	10 pcs.

Flexible round duct made of PE-HD, ideal for installation in concrete ceiling. Includes two hygiene duct shutter covers, can also be ordered separately.

### flexpipe vent. duct oval ○




### flexpipe vent. duct (bundle = 20 lin. m)

Type	Ref. no.	Dim. in mm
114 x 51 mm		Width Height
FRS-R 51 ○	03850	114 51
<b>Hygiene duct shutter cover</b>		
FRS-VD 51 ○	03866	10 pcs.

Flexible oval duct made of PE-HD, for space-saving installation on unfinished floors, installation in walls or suspended ceilings. Includes two hygiene duct shutter covers, can also be ordered separately.


### Cover, seal ring, bracket ○



### Connector cover / seal ring / bracket

Type	Ref. no.	Unit
Ø 75 mm		
<b>Connector shutter cover with seal ring</b>		
FRS-VDS 75 ○	03855	1 pc.
<b>Seal ring</b>		
FRS-DR 75 ○	02916	10 pcs.
<b>Bracket, detachable</b>		
FRS-FK ○ ○	03854	10 pcs.


### Cover, seal ring, bracket ○



### Connector cover / seal ring / bracket

Type	Ref. no.	Unit
114 x 51 mm		
<b>Connector shutter cover with seal ring</b>		
FRS-VDS 51 ○	03856	1 pc.
<b>Seal ring</b>		
FRS-DR 51 ○	03864	10 pcs.
<b>Bracket, detachable</b>		
FRS-FK ○ ○	03854	10 pcs.

### Connecting sleeve ○




### Connecting sleeve

Type	Ref. no.
Ø 75 mm	
FRS-VM 75 ○	02914

Connecting sleeve for round duct FRS-R 75 with tear-off protection on both sides, made of polyethylene.

### Connecting sleeve ○




### Connecting sleeve

Type	Ref. no.
114 x 51 mm	
FRS-VM 51 ○	03862

Connecting sleeve for oval duct FRS-R 51. With integrated fastening tabs, includes duct mounting brackets (4 pcs.). Made of impact-resistant polypropylene.

### Short bend 90° ○




### Short bend 90°

Type	Ref. no.
Ø 75 mm	
FRS-B 75 ○	02994

Short bend 90° for bending radii < 2 x round duct external diameter. Horizontal and vertical application with tear-off protection on both sides. Made of galvanised steel sheet.

### Bend horizontal / vertical ○



### Bend horizontal / vertical

Type	Ref. no.
114 x 51 mm	
FRS-BH 51 ○	03863
FRS-BV 51 ○	03859


Horizontal or vertical bend 90°. With integrated fastening tabs, includes duct mounting brackets (4 pcs.). Made of impact-resistant polypropylene.

### Optional possibility to combine round and oval ducts

- With flexpipe® plus from Helios, you rely on one system and you have the ideal solution at your fingertips at all times, depending on building requirements.
- The ultra-flat (only 51 mm) oval duct is used if low installation heights are required. The proven duct lends itself for direct embedding in concrete ceilings.
- Thanks to the identical hydraulic cross-sections and pressure losses of the two ducts and due to well-conceived system components, round and oval ducts can be combined in any way – both in line and away from the distribution box.




Vertical and horizontal adapters allow any round/oval, oval/oval and round/round combination.



The distribution boxes can be equipped with round and oval single connectors and mixed connectors.

### Adapter straight / vertical ○ ○




### Adapter straight / vertical

Type	Ref. no.
Ø 75 mm / 114 x 51 mm	
<b>Adapter straight</b>	
FRS-ÜG 51-75 ○ ○	03861
<b>Adapter vertical</b>	
FRS-ÜV 51-75 ○ ○	03860

Horizontal and vertical adapter from round duct FRS-R 75 to oval duct FRS-R 51. With integrated fastening tabs, includes duct mounting brackets (4 pcs.). Made of impact-resistant polypropylene.

### Mounting clip ○ ○




### Mounting clip

Type	Ref. no.	Unit
Ø 75 mm / 114 x 51 mm		
FRS-BS ○ ○	03869	10 pcs.

Mounting clip for round duct FRS-R 75 and oval duct FRS-R 51. For non-slip duct fixation. Made of galvanised steel sheet.

## Ceiling/wall box ○




## Ceiling / wall box

Type	Ref. no.
<b>Type Ø 75 mm</b>	
FRS-DWK 2-75/125 ○	03857
<b>Extension for ceilings &gt; 240 mm</b>	
FRS-VV 125 ○ ○	03906

Ceiling / wall box for max. 2 round ducts FRS-R 75. For connection of supply / extract air valves DN 125. Height marks can be shortened to fit. Per 1 pc. connector blind cover DN 75, DN 125.  
<sup>1)</sup> Integr. mounting clips, duct mounting brackets (4 pcs.), made of impact-resistant polypropylene.

## Ceiling/wall box ○




## Ceiling / wall box

Type	Ref. no.
<b>Type 114 x 51 mm</b>	
FRS-DWK 2-51/125 ○	03858
<b>Extension for ceilings &gt; 240 mm</b>	
FRS-VV 125 ○ ○	03906

Ceiling / wall box for max. 2 oval ducts FRS-R 51. For connection of supply / extract air valves DN 125. Height marks can be shortened to fit. Per 1 pc. connector blind cover 51 mm, DN 125.  
<sup>2)</sup> Integr. mounting clips, duct mounting brackets (4 pcs.), made of impact-resistant polypropylene.

## Multi-floor box ○




## Multi-floor box

Type	Ref. no.
<b>Type Ø 75 mm</b>	
FRS-MBK 2-75 ○	03872

Multi-floor box for connection of max. 2 round ducts FRS-R 75. Suitable for embedding in concrete ceiling, consists of:  
 – Floor box with air volume control insert in robust sheet metal design  
 – 2 pcs. connectors (round) and 1 pc. connector cover with seal (round)

## Wall/floor box ○




## Wall / floor box

Type	Ref. no.
<b>Type 114 x 51 mm</b>	
FRS-WBK 2-51 ○	03877

Wall / floor box for connection of max. 2 oval ducts FRS-R 51. Installation in walls or on unfinished floor, consists of:  
 – Plastic box made of impact-resistant polypropylene with air volume control insert. For use with FRS-WGS or FRS-BGS.  
 – 1 pc. connector cover with seal (oval).

## Floor grille set ○ ○




## Floor grille set

Type	Ref. no.
<b>Type</b>	
FRS-BGS 1 ○ ○	03878

Floor grille set made of stainless steel for multi-floor box FRS-MBK 2-75 and wall / floor box FRS-WBK 2-51, consists of:  
 – Grille frame with height adjustment for barrier-free installation in the floor covering  
 – Anti-puncture design floor grille  
 – Insert filter (replacement filter mats ELF-BGS, Ref. no. 03914, unit = 2 pcs.)

## Wall grille set ○




## Wall grille set

Type	Ref. no.	
<b>Type</b>		
FRS-WGS 1 ○	03881	white
FRS-WGS 2 ○	03882	white
FRS-WGS 3 ○	03883	white
FRS-WGS 1 E ○	03886	Stainl. steel
FRS-WGS 2 E ○	03892	Stainl. steel
FRS-WGS 3 E ○	03904	Stainl. steel

Wall grille set with installation frame and insert filter for FRS-WBK 2-51. See p. 78 for grille designs.

## Floor box set ○




## Floor box set

Type	Ref. no.
<b>Type Ø 75 mm</b>	
FRS-BKGS 2-75 ○	09992

Floor box set consists of:  
 – 1 pc. floor box for grille connection DN 160  
 – 1 pc. floor grille made of brushed stainless steel with adjustable volume flow  
 – 1 pc. cover

## Wall outlet ○




## Wall outlet for valve connection

Type	Ref. no.	Ø D mm
<b>Type Ø 75 mm</b>		
FRS-WDV 2-75/100 ○	09621	100
FRS-WDV 2-75/125 ○	09622	125

Wall outlet incl. plaster / formwork lid and cover (1 pc.). For connection of supply air or extract air valves DN 100 or DN 125.

## Wall outlet set ○



## Wall outlet set, straight

Type	Ref. no.
<b>Type Ø 75 mm</b>	
FRS-WDS 2-75 ○	09994

Wall outlet set consists of:  
 – Wall outlet with sliding connector  
 – Wall outlet white (FK-WA 200 W), 250 x 103 mm  
 – 1 pc. cover

## Basic set package ○




## Basic set package

Type	Ref. no.	Ø D mm
<b>Type</b>		
FRS-RP 75 ○	09397	75

flexpipe basic set package consists of:  
 – 3 pcs. FRS-R 75 (Ref. no. 02913)  
 – 2 pcs. FRS-VK 10-75/160 (Ref. no. 03847)  
 – 8 pcs. FRS-DWK 2-75/125 (Ref. no. 03857)  
 – 7 pcs. FRS-B 75 (Ref. no. 02994)  
 – 7 pcs. FRS-VM 75 (Ref. no. 02914)  
 – 4 units FRS-DR 75 (Ref. no. 02916)  
 – 1 units FRS-VD 75 (Ref. no. 02915)  
 – 1 pcs. cold shrink tape KSB (Ref. no. 09343)

By choosing the Helios basic set package, you can save  
 – money due to the discounted package price.  
 – time, because everything is included to get started right away. There is no need for time consuming, annoying additional trips because little things are missing.

## Angle bend set ○



## Angle bend set, 90°


Type	Ref. no.
<b>Type Ø 75 mm</b>	
FRS-WBS 2-75 ○	09996

Angle bend set consists of:  
 – Angle bend with sliding connector  
 – Wall outlet white (FK-WA 200 W), 250 x 103 mm  
 – 1 pc. cover

<sup>1)</sup> Cover with integrated seal FRS-VDS 75, Ref. no. 03855 and -VD 125, Ref. no. 03865. Cover can be used for the connector or duct connection opening on distribution box.

<sup>2)</sup> Cover with integrated seal FRS-VDS 51, Ref. no. 03856 and -VD 125, Ref. no. 03865. Can also be used as cover for the connector or duct connection opening on distribution box.

#### Multi-distribution box 4+1x Ø




Dim. in mm

#### Multi-distribution box 4+1x<sup>1)</sup>

Type	Ref. no.	Ø NW mm
<b>Type Ø 75 mm</b>		
FRS-MVK 4+1-75/125	03843	125

For universal installation in/on unfinished concrete flooring. With height-adjustable mounting brackets. Duct connection DN 125 optionally horizontal or vertical. 10 connection options for up to 5 ventilation ducts FRS-R 75. With sound-absorbing cladding and large inspection opening.

#### Multi-distribution box 4+1x



#### Multi-distribution box 4+1x<sup>1)</sup>

Type	Ref. no.	Ø NW mm
<b>Type 114 x 51 mm</b>		
FRS-MVK 4+1-51/125	03841	125

For universal installation on unfinished concrete flooring. With height-adjustable mounting brackets. Duct connection DN 125 optionally horizontal or vertical. 10 connection options for up to 5 oval ventilation ducts FRS-R 51. With sound-absorbing cladding and large inspection opening.

#### Multi-distribution box 5+2x





Fig.: FRS-MVK 5+2-75/160

#### Multi-distribution box 5+2x<sup>1)</sup>

Type	No.	Ø NW mm
<b>Type Ø 75 mm</b>		
FRS-MVK 5+2-75/160	03836	160
FRS-MVK 5+2-75/160 H	03835	160

For universal installation in/on unfinished concrete flooring. With height-adjustable mounting brackets. Duct connection DN 160 optionally horizontal or vertical. Type FRS-MVK 5+2-75/160 H with 380 mm casing height and 3 x duct connection DN 160. 12 connection options for up to 7 ventilation ducts FRS-R 75.

#### Multi-distribution box 5+2x




#### Multi-distribution box 5+2x<sup>1)</sup>

Type	Ref. no.	Ø NW mm
<b>Type 114 x 51 mm</b>		
FRS-MVK 5+2-51/160	03838	160

For universal installation on unfinished concrete flooring or as floor distributor. With height-adjustable mounting brackets. Duct connection DN 160 optionally horizontal or vertical. 12 connection options for up to 7 oval ventilation ducts FRS-R 51. With sound-absorbing cladding and large inspection opening.

#### Distribution box 10x




#### Distribution box 10-75<sup>2)</sup>

Type	Ref. no.	Ø NW mm
<b>Type Ø 75 mm</b>		
FRS-VK 10-75/160	03847	160

20 connection options for up to 10 ventilation ducts FRS-R 75. Can be installed as straight distributor, 90° distributor or combined. Mixed setup with oval connectors possible (Type FRS-ES 51, Ref. no. 03851). With sound-absorbing cladding and large inspection opening.

#### Distribution box 10x




#### Distribution box 10-51<sup>2)</sup>

Type	Ref. no.	Ø NW mm
<b>Type 114 x 51 mm</b>		
FRS-VK 10-51/160	03849	160

20 connection options for up to 10 oval ventilation ducts FRS-R 51. Can be installed as straight distributor, 90° distributor or combined. Mixed setup with round connectors possible (Type FRS-ES 75, Ref. no. 03852). With sound-absorbing cladding and large inspection opening.

#### Flat distribution box 6x




#### Distribution box 6-75, flat design<sup>1)</sup>

Type	Ref. no.	Ø NW mm
<b>Type Ø 75 mm</b>		
FRS-FVK 6-75/125	03845	125

For connection of up to 6 ventilation ducts FRS-R 75. Installation as straight distributor. Mixed setup with oval connectors possible (Type FRS-ES 51, Ref. no. 03851). With sound-absorbing cladding and large inspection opening.

#### Distribution box 6x




#### Distribution box 6-75<sup>1)</sup>

Type	Ref. no.	Ø NW mm
<b>Type Ø 75 mm</b>		
FRS-VK 6-75/125	03846	125

12 connection options for up to 6 ventilation ducts FRS-R 75. Can be installed as straight distributor, 90° distributor or combined. Mixed setup with oval connectors possible (Type FRS-ES 51, Ref. no. 03851). With sound-absorbing cladding and large inspection opening.

#### Distribution box 15x



#### Distribution box 15-75<sup>2)</sup>

Type	Ref. no.	Ø NW mm
<b>Type Ø 75 mm</b>		
FRS-VK 15-75/180	03848	180

30 connection options for up to 15 ventilation ducts FRS-R 75. Can be installed as straight distributor, 90° distributor or combined. Mixed setup with oval connectors possible (Type FRS-ES 51, Ref. no. 03851). With sound-absorbing cladding and large inspection opening.

#### Combination distribution box





Fig.: Type L

#### Combination distribution box<sup>1)</sup>

Type	Ref. no.	Ø NW mm
<b>Type Ø 75 mm</b>		
FRS-KVK 6-75/125 L*	03873	125
FRS-KVK 6-75/125 R*	03874	125

\* Supply air connection on left or right. Compact distribution box, ideal for adjoining extract air rooms. 2 x DN 100 for direct insertion of extract air valves DLV (see accessories). Supply air distribution via connection of up to 6 ventilation ducts FRS-R 75.

#### Connector, cover

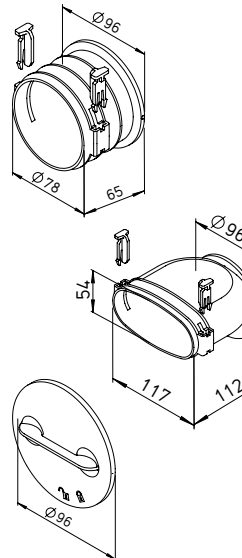


#### Connector, bayonet cap

Type	Ref. no.	Unit
<b>Connector, Ø 75 mm</b>		
FRS-ES 75	03852	1 pc.
<b>Connector, 114 x 51 mm</b>		
FRS-ES 51	03851	1 pc.
<b>Bayonet cap</b>		
FRS-VDB	03853	1 pc.


Additional connectors for connection of round ventilation duct FRS-R 75 or oval ventilation duct FRS-R 51 to distribution box. Easy and variable positioning using bayonet closure. Tight-closing, includes duct mounting brackets (2 pcs.), made of impact-resistant polypropylene. Bayonet cap for the connector openings on the distribution box.

<sup>1)</sup> incl. 2 pcs. connector cover.

<sup>2)</sup> incl. 4 pcs. connector cover.




Type Ø 75 mm No. Ø NW mm  
FRS-MVK 4+1-75/125 03843 125




Type 114 x 51 mm No. Ø NW mm  
FRS-MVK 4+1-51/125 03841 125

Frequency	Insertion loss	Cross-talk loss
Hz	dB	dB
125	23.5	30.6
250	24.2	25.3
500	19.3	18.3
1000	28.7	25.3
2000	30.8	39.0
4000	36.6	42.9
8000	38.3	40.8




Type Ø 75 mm No. Ø NW mm  
FRS-MVK 5+2-75/160 03836 160  
FRS-MVK 5+2-75/160 H 03835 160




Type 114 x 51 mm No. Ø NW mm  
FRS-MVK 5+2-51/160 03838 160


Frequency	Insertion loss	Cross-talk loss
Hz	dB	dB
125	21.0	28.8
250	16.5	24.7
500	24.6	28.0
1000	36.3	34.4
2000	35.2	40.2
4000	43.8	45.0
8000	46.1	41.1



Type Ø 75 mm No. Ø NW mm  
FRS-VK 10-75/160 03847 160




Type 114 x 51 mm No. Ø NW mm  
FRS-VK 10-51/160 03849 160




Type Ø 75 mm No. Ø NW mm  
FRS-VK 6-75/125 03846 125

Frequency	Insertion loss	Cross-talk loss
Hz	dB	dB
125	23.0	34.4
250	21.8	33.1
500	36.2	27.4
1000	29.4	26.9
2000	28.9	38.7
4000	34.4	44.2
8000	36.1	44.0



Type Ø 75 mm No. Ø NW mm  
FRS-FVK 6-75/125 03845 125

Frequency	Insertion loss	Cross-talk loss
Hz	dB	dB
125	22.6	27.4
250	21.3	21.4
500	27.7	20.4
1000	28.8	20.2
2000	30.6	33.6
4000	42.6	40.1
8000	43.2	40.2



Type Ø 75 mm No. Ø NW mm  
FRS-VK 15-75/180 03848 180

Frequency	Insertion loss	Cross-talk loss
Hz	dB	dB
125	26.8	30.9
250	19.4	30.2
500	28.4	25.3
1000	25.4	29.0
2000	30.8	39.8
4000	34.7	49.1
8000	34.9	53.0

Measured in accordance with DIN EN ISO 7235 and DIN EN ISO 11820.

### flexpipe® plus ceiling-integrated distribution element




With the ceiling-integrated distribution element, we are making it even easier for you to realise the perfect KWL ventilation system quickly and easily in the future. The distribution element is not only flexible in application due to its compact dimensions, but it also saves you the complicated duct insertion and removal from the concrete ceiling

#### Highlights:

- Intelligent, almost invisible solution for air distribution of flexpipe® plus ducts in concrete ceilings for single-family houses and apartment buildings.
- Integrated height adjustment for different ceiling types.
- Installation without formwork damage and tool-free duct connection using a click system save time and money.


#### Installation in filigree ceiling:



#### Installation in raw concrete ceiling:



#### Distribution element 5x




#### flexpipe distribution element 5x

Type	Ref. no.	Ø NW mm
FRS-VE 5-75/160	40161	160

For universal installation in the unfinished concrete flooring. Duct connection DN 160 or DN 125 possible (duct connector RVBD 160 L or RVBD 160/125 required for this). 10 connection options for up to 5 FRS-R 75 ventilation ducts. Large inspection opening for easy cleaning incl. cover.

#### Fitting for duct connection




#### Duct connector

Type	Ref. no.
RVBD 160/125	40165

Duct connector for the connection of ventilation ducts/IsoPipe ducts DN 125.

#### Distribution element 9x




#### flexpipe distribution element 9x

Type	Ref. no.	Ø NW mm
FRS-VE 9-75/160	40162	160

For universal installation in the unfinished concrete flooring. Duct connection DN 160 or DN 125 possible (duct connector RVBD 160 L or RVBD 160/125 required for this). 12 connection options for up to 9 FRS-R 75 ventilation ducts. Large inspection opening for easy cleaning incl. cover.

#### Fitting for duct connection



#### Duct connector long

Type	Ref. no.
RVBD 160 L	40164

Duct connector for the connection of ventilation ducts/IsoPipe ducts DN 160.

### flexpipe® plus Silencer box




The ideal companion for the FRS-VE ceiling-integrated distribution element: The innovative FRS silencer box.

#### Highlights:

- Direct mounting on the ceiling-integrated distribution element for minimal space requirements, e.g. directly under the ceiling.
- Optimal sound insulation properties. In combination with FRS-VE, values of up to 30 dB are achieved.
- Very good accessibility for easy cleaning thanks to extra-large inspection opening.
- Simple and flexible installation vertically on the wall or horizontally on the ceiling.

#### Silencer box




#### flexpipe silencer box

Type	Ref. no.	Ø NW mm
FRS-SDB 75/160	40163	75

Silencer and distribution box for combination with the FRS-VE. RVBD 160 L required for connection. Horizontal and vertical installation possible. 4 optional connections 75 mm at the front. Optional accessories: Single connector ref. no. 03852. Including: Mounting bracket, 75 mm cover and 160 mm cover.

#### Insertion losses

Type	Ref. no.	Insertion loss $D_e$ dB at Hz						Average insertion loss
		125	250	500	1000	2000	4000	
FRS-SDB 75/160	40163	16	23	23	17	21	18	23

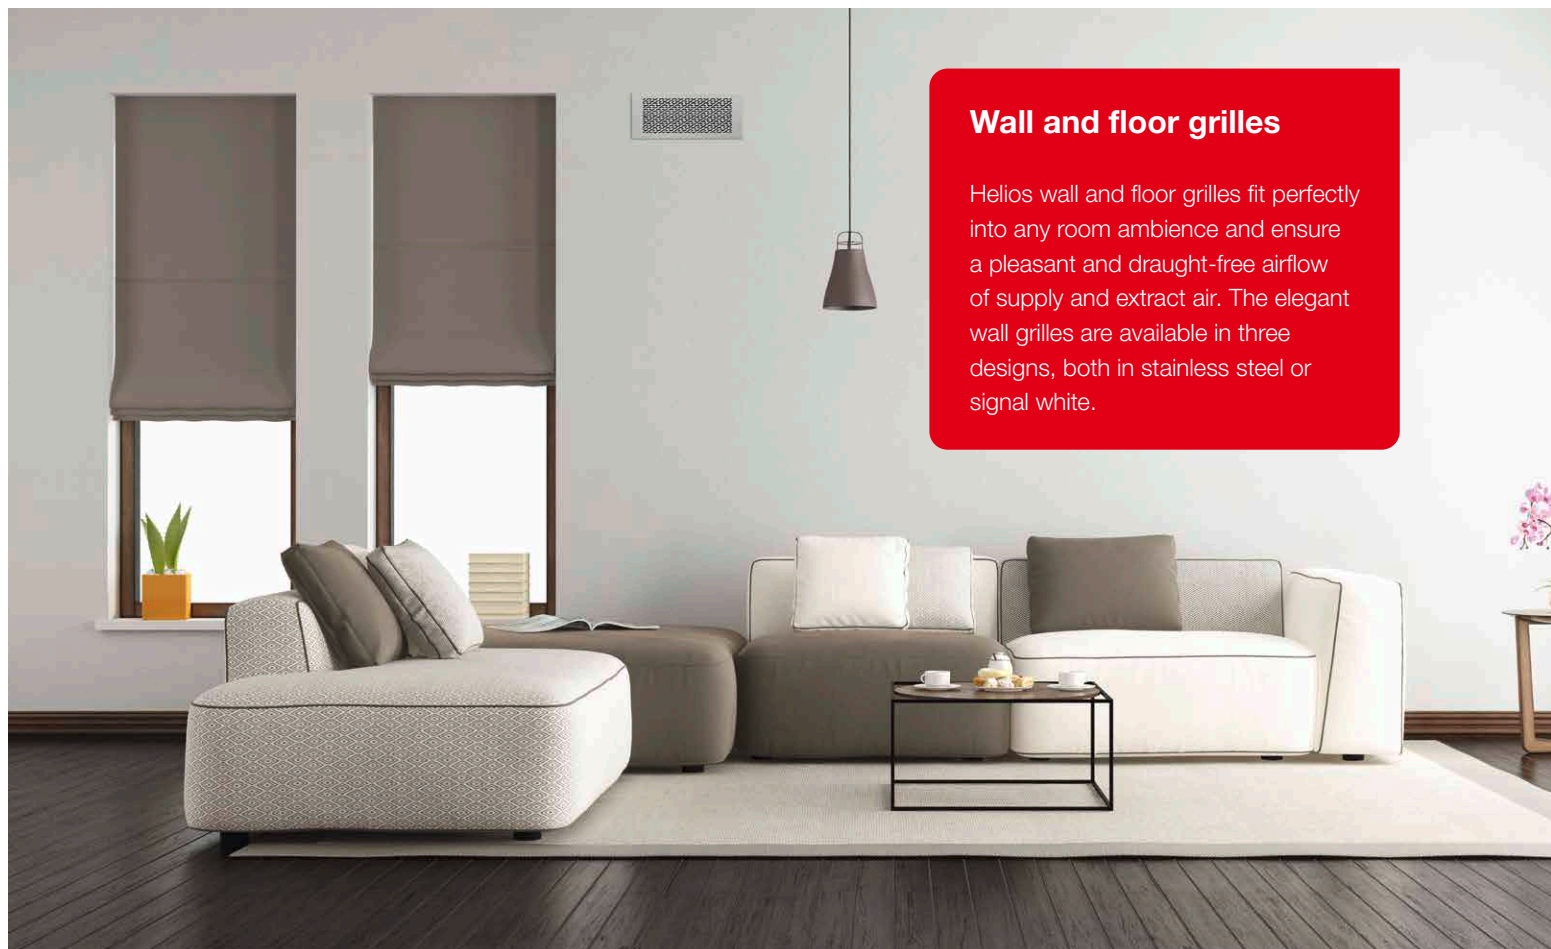


### Wall and floor grilles

Helios wall and floor grilles fit perfectly into any room ambience and ensure a pleasant and draught-free airflow of supply and extract air. The elegant wall grilles are available in three designs, both in stainless steel or signal white.



### Design grilles for walls and floors


Design 1  
(wall and floor)



Design 2  
(wall)



Design 3  
(wall)



Stainless steel version

The elegant wall grilles in three high-quality designs (stainless steel or signal white coating) blend perfectly into any room atmosphere and guarantee the pleasant draught-free flow of supply air.

#### ■ Description Wall grille set

Grille for wall/floor box FRS-WBK 2-51.

- Set consists of:  
Metal wall grille with installation frame and insert filter.

#### ■ Surfaces/Colours

- Powder coating in white:  
FRS-WGS 1, FRS-WGS 2 and FRS-WGS 3.
- High-quality stainless steel: FRS-WGS 1 E, FRS-WGS 2 E and FRS-WGS 3 E.

Floor grille set for floor level installation. Three-dimensional adjustable compensation mechanism for adapting the grille to different floor covering heights or for alignment to a wall or window.

#### ■ Description Floor grille set


Grille for multi-floor box FRS-MBK 2-75 and wall/floor box FRS-WBK 2-51.

- Set consists of:  
Grille frame, design floor grille and insert filter.

#### ■ Surfaces/Colours

- High-quality stainless steel:  
FRS-BGS 1.

### Wall grille set / Design 1



Dimensions in mm

### Wall grille set


Type	Ref. no.	
FRS-WGS 1	03881	White
FRS-WGS 1 E	03886	Stainl. steel

Replacement filter mat for insert filter:  
Type ELF-WGS, Ref. no. 03915, unit = 2 pcs.



- Wall grille set FRS-WGS 1 E with additional wall/floor box FRS-WBK 2-51.

### Wall grille set / Design 2



### Wall grille set


Type	Ref. no.	
FRS-WGS 2	03882	White
FRS-WGS 2 E	03892	Stainl. steel

Replacement filter mat for insert filter:  
Type ELF-WGS, Ref. no. 03915, unit = 2 pcs.



- Wall grille set FRS-WGS 2 E with additional wall/floor box FRS-WBK 2-51.

### Wall grille set / Design 3



### Wall grille set


Type	Ref. no.	
FRS-WGS 3	03883	White
FRS-WGS 3 E	03904	Stainl. steel

Replacement filter mat for insert filter:  
Type ELF-WGS, Ref. no. 03915, unit = 2 pcs.



- Wall grille set FRS-WGS 3 E with additional wall/floor box FRS-WBK 2-51.

### Floor grille set



### Floor grille set

Type	Ref. no.	
FRS-BGS 1	03878	Stainl. steel

Replacement filter mat for insert filter:  
Type ELF-BGS, Ref. no. 03914, unit = 2 pcs.




- Floor grille set FRS-BGS 1 with additional wall/floor box FRS-WBK 2-51. Also suitable for multi-floor box FRS-MBK 2-75.

**KWL-MZB 6+1-75/125 R90 and KWL-MZB 6+1-75/125 L90**




Compact unit for connection of supply and extract air DN 125 and 2 x 7 connectors DN 75 with supply air on right or left side.

**KWL-MZB 6+1-75/125 R90**

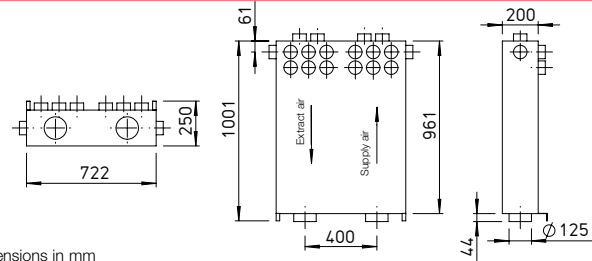

Dimensions in mm

**KWL-MZB 6+1-75/125 L90**

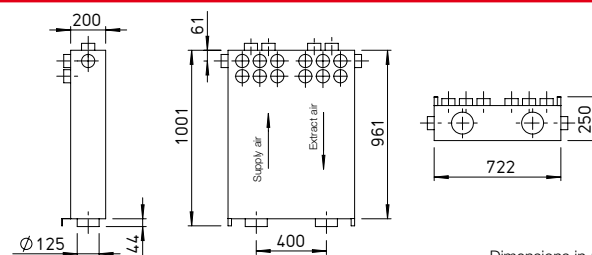

Dimensions in mm


**KWL-MZB 6+1-75/125 and KWL-MZB 125/125**



Compact unit for the connection of supply and extract air DN 125 and 2 x 7 connectors DN 75.


Box with one connection each for supply and extract air on each side DN 125.

**KWL-MZB 6+1-75/125**

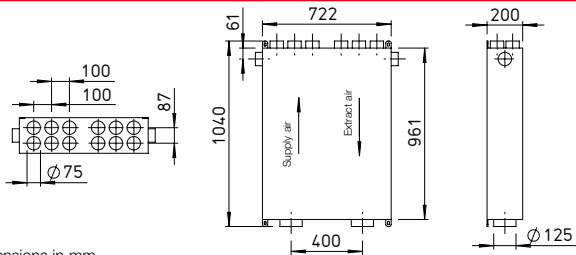

Dimensions in mm

**KWL-MZB 125/125**

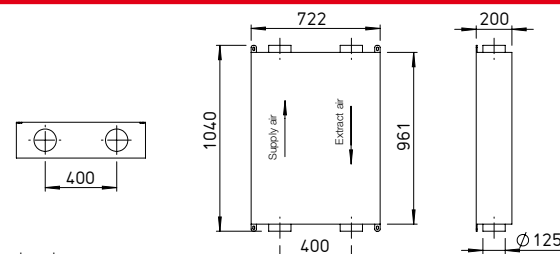

Dimensions in mm

**Volume flow control, sound insulation, air distribution and system control – solve seven problems at once with the new KWL MultiZoneBox.**

**When combined with a central KWL or Helios AIR1 unit with constant pressure control, the MultiZoneBox ensures the silent, demand-oriented supply and extract ventilation of residential and commercial units.**

**Advantages**

- ☐ The installation and commissioning are particularly simple and safe.
- ☐ Spiral ducts can also be connected just as easily as the flexible plastic duct system **flexpipeplus**.
- ☐ Reliable air distribution for almost all areas of application.
- ☐ Practical advantages include freedom from maintenance,

maximum functional reliability and whisper-quiet operation.

- ☐ When multiple KWL MultiZoneBoxes are used to ventilate a large unit, e.g. a doctor's surgery, different zones can be supplied with varying air volumes independently and according to demand.
- ☐ Whether the ventilation system is installed in the basement or on the roof, indoors or outdoors.
- ☐ The KWL MultiZoneBox always ensures an ideal air distribution.

**Special features**

- ☐ Large sound insulation elements guarantee silent operation.
- ☐ The optional room air sensor makes the MultiZoneBox a complete demand-controlled ventilation unit.
- ☐ Only one single, compact box is installed.

- ☐ Expendable parts and wear parts were dispensed with completely in the design of the KWL MultiZoneBox.
- ☐ Revolutionary technology safely guarantees the predefined volume flow.

**Functional principle**

Thanks to the intuitive PC software, the commissioning of the KWL MultiZoneBox is convenient and fast:

- ☐ Start software > enter air volumes > done!
- There is no need for elaborate, time-consuming pressure differential measurements.
- ☐ A variety of other configuration options are available, if required.
- ☐ Once set, the defined parameters can be stored on a computer and transferred to other boxes.

**The box in the network**

All boxes can be combined to form a network and operated centrally (using a central controller, KWL-ZR, accessories): The KWL MultiZoneBox software allows the central commissioning of all boxes in the network. Optionally on-site or via the internet.

**The ultimate solution**

This technology is used to constantly coordinate the performance of the central ventilation unit with the changing conditions for each KWL MultiZoneBox. The unit supplies the exact air volume individually required for every moment. This reduces energy consumption without comprising on comfort.

### Control element Touch

**KWL-MZB-BET** Ref. no. 04214

Touch display made of glass for controlling and configuring the boxes.

- Dimensions (WxHxD)  
110x93x19 mm
- 3.9 inch display including temperature sensor, flush-mounted version.

### KWL-MZB-BET



### KWL-MZB-AP



### Connection plate

**KWL-MZB-AP** Ref. no. 04217

For installation in concrete ceilings.

- Dimensions (WxHxD)  
776x50x255 mm
- 2 x 6 connectors DN 75.
- For direct box connection to the duct system in the ceiling.

### Control element ECO

**KWL-MZB-BE** Ref. no. 04213

Manual 4-step operation or automatic mode. For flush-mounted installation.

- Dimensions (WxHxD)  
80x80x10 mm
- 4-step with LED, flush-mounted version.

### KWL-MZB-BE



### KWL-MZB-RH13



### Pipe support

**KWL-MZB-RH13** Ref. no. 04249

Pipe supports for **one-sided** connection of **flexpipe<sup>plus</sup>** to the connection plate KWL-MZB-AP.

- Consists of 1 connection plate with 13 supports.

### Central controller

**KWL-MZB-ZR** Ref. no. 04215

Central control, configuration and management of all connected boxes.

- Networking of up to 256 boxes.
- Fan optimiser function.
- Suitable switching power supply: KWL 45 SNH, No. 03001.

### KWL-MZB-ZR



### KWL-MZB-RH7



### Pipe support

**KWL-MZB-RH7** Ref. no. 04236

Pipe supports for **two-sided** connection of **flexpipe<sup>plus</sup>** to the connection plate KWL-MZB-AP.

- Set consists of 2 connection plates each with 7 supports.

### Combi-sensor

**KWL-MZB-VOC-F** No. 04216

Combi-sensor (air humidity and VOC) for installation in MZB.

- VOC-humidity sensor.
- Installation in KWL MultiZone-Box.

### KWL-MZB-VOC-F



### KWL-MZB-VSAP



### Connection set

**KWL-MZB-VSAP** Ref. no. 04219

For ceiling installation with connection plate. Set with 12 connectors and mounting bracket.

- Includes 12 connectors for connection plate.

### Humidity sensor

**KWL-MZB-F** Ref. no. 04250

Air humidity sensor for installation in KWL MultiZoneBox.

### KWL-MZB-F



### KWL-MZB-KSS



### Plastic connectors DN 75

**KWL-MZB-KSS** Ref. no. 04253

Set consists of 2 pcs., for the optional, side connection of a ventilation duct DN 75 to KWL-MZB 125/125 (Ref. no. 04053), included in delivery for boxes 04050, 04051, 04052.

Technical data MultiZoneBox			
Type	Ref. no.	Type	Ref. no.
KWL-MZB 6+1-75/125 R90	04050	KWL-MZB 6+1-75/125*	04052
KWL-MZB 6+1-75/125 L90	04051	KWL-MZB 125/125*	04053
Range of application			40–220 m³/h
Measurement accuracy			+/-10 m³/h
Voltage / Frequency			1~, 230 V, 50 Hz
Max. power consumption			6 Watt
Protection category			IP40
Weight			25 kg

\* Supply air and extract air flow directions freely selectable.  
Individual type details at [www.HeliosSelect.de](http://www.HeliosSelect.de).

### Reference

Suitable revision solution for drywall construction on request.

flexpipe is embedded directly in concrete or on/under ceilings,

- Simple planning and quick installation due to star-shaped, flexible continuous installation from the roll.
- Construction site-compliant handling due to low weight.
- Quick commissioning, uniform air distribution.
- Easy to clean.

■ Available in two sizes and designs

- flexpipe FRS 63  
External Ø: 63 mm, internal: 52 mm for vol. flows up to 20 m³/h.
- flexpipe<sup>plus</sup>  
External Ø: 75 mm, internal: 63 mm for vol. flows up to 30 m³/h. Can be combined with oval duct FRS-R 51 and oval components, see page 72 ff.

■ Properties and advantages

- Special ventilation duct made of hygienically safe PE-HD new material, odourless.
- The two-layer design (externally corrugated and internally smooth and antistatically treated) guarantees:
  - Low flow resistances and high sound insulation.
  - Minimal dirt deposits.
  - Easy to clean.

■ Installation

- The flexpipe plastic corrugated pipe has high ring strength ( $S_{R24} > 8 \text{ kN/m}^2$ ) and it can be installed directly in, on or under concrete ceilings due to its high flexibility in the desired system.
- Airtight and watertight connection simply through the use of FRS seal rings.


flexpipe vent. duct round



flexpipe vent. duct (bundle = 50 lin. m)

Type	Ref. no.	Dim. in mm	
Ø 63 mm		Ext. Ø	Int. Ø
FRS-R 63	09327	63	52

Ceiling box




Ceiling box<sup>2)</sup> for valve connection DN 125

Type	Ref. no.
Ø 63 mm	
FRS-DKV 2-63/125	09430

Ceiling box incl. plaster/formwork lid. For connection of supply or extract air valves DN 125 (accessories, see page 9).

Distribution box 6-63, 12-63




Distribution box 6-63, 12-63<sup>1)</sup>

Type	Ref. no.	Ø NW mm
Ø 63 mm		
FRS-VK 6-63/125	09355	125
FRS-VK 12-63/160	09336	160

For connection of up to 6 or 12 ventilation ducts FRS-R 63, with sound-absorbing cladding. The connector plate can be replaced with the inspection opening and rotated 90° for type 12-63.

Floor box set




Floor box set<sup>2)</sup>

Type	Ref. no.
Ø 63 mm	
FRS-BKGS 2-63	09991

Floor box set consists of:

- 1 pc. floor box for grille connection DN 160
- 1 pc. floor grille made of brushed stainless steel with adjustable volume flow.

Distribution box 18-63




Distribution box 18-63<sup>1)</sup>

Type	Ref. no.	Ø NW mm
Ø 63 mm		
FRS-VK 18-63/180	09364	180

For connection of up to 18 ventilation ducts FRS-R 63, with sound-absorbing cladding. The connector plate with the connectors can be replaced with the inspection opening and rotated 90°. This allows installation as a straight or 90° distributor.

Wall outlet set




Wall outlet set, straight<sup>2)</sup>

Type	Ref. no.
Ø 63 mm	
FRS-WDS 2-63	09993

Wall outlet set consists of:

- Wall outlet with sliding connector
- Wall outlet white (FK-WA 200 W), 250 x 103 mm

Short bend 90°




Short bend 90°

Type	Ref. no.
Ø 63 mm	
FRS-B 63	09348

Short bend 90° for bending radius < 2 x external duct diameter.

Angle bend set




Angle bend set, 90°<sup>2)</sup>

Type	Ref. no.
Ø 63 mm	
FRS-WBS 2-63	09995

Angle bend set consists of:

- Angle bend with sliding connector
- Wall outlet white (FK-WA 200 W), 250 x 103 mm

Short bend 90°




Short bend 90°

Type	Ref. no.
Ø 63 mm	
FRS-B 75/2-63	09341

Short bend 90° as transition from 1 x 75 mm to 2 hoses with 63 mm.

Sleeve, cover, seal ring



Sleeve, cover, seal ring

Type	Ref. no.	Unit
Ø 63 mm		
FRS-VM 63 Sleeve	09329	
FRS-VD 63 Cover	09330	10 pcs.
FRS-DR 63 Seal ring	09331	10 pcs.

**Note:** A seal ring (for IP66) must be used at every connection point (duct / duct, duct / moulded part). Please order corresponding number separately. Coating with lubricant is recommended for installation.

<sup>1)</sup> Incl. 6 pcs. cover.

<sup>2)</sup> Incl. 1 pcs. cover.

### IsoPipe facade panels



IsoPipe facade panels made of stainless steel for connection to intake air and exhaust air ducts.

#### ■ Properties

All IsoPipe facade panels are made of high-quality stainless steel.  
Also available in coated version (types B) for use in environments with severe air pollution or high salt concentration in the air (near the coast).

#### ■ Application and installation

##### □ Facade combination panel IP-FKB

Designed for the compact installation of IsoPipe intake air and exhaust air ducts with just one facade panel. Universally applicable for horizontal or vertical installation.  
Exhaust connectors can be positioned on the right, left or top.


##### □ Exhaust air facade panel IP-FBF

For the IsoPipe duct system. Horizontal installation position. The exhaust air is discharged directly and horizontally through the duct connectors.

##### □ Intake air facade panel IP-FBA

For the IsoPipe duct system. Horizontal installation position. The intake air is taken in through the side on both sides.


### IP-FKB



IsoPipe Ø 125 mm						IsoPipe Ø 160 mm						IsoPipe Ø 180 mm					
Type	Ref. no.					Type	Ref. no.					Type	Ref. no.				
Facade combination panel – Stainless steel																	
IP-FKB 125		02689				IP-FKB 160		02694				IP-FKB 180		02695			
Dim. in mm		A	Ø B	C	D E	Dim. in mm		A	Ø B	C	D E	Dim. in mm		A	Ø B	C	D E
		420	157	200	100 170			480	192	240	118 210			520	212	290	150 230
Facade combination panel – Stainless steel with additional coating																	
IP-FKB 125 B		02661				IP-FKB 160 B		02662				IP-FKB 180 B		02663			
Dim. in mm		A	Ø B	C	D E	Dim. in mm		A	Ø B	C	D E	Dim. in mm		A	Ø B	C	D E
		420	157	200	100 170			480	192	240	118 210			520	212	290	150 230
Exhaust air outlet on the right, left or top																	


Exhaust air outlet on the right, left or top.

### IP-FBF



IsoPipe Ø 125 mm					IsoPipe Ø 160 mm					IsoPipe Ø 180 mm				
Type	Ref. no.				Type	Ref. no.				Type	Ref. no.			
Facade panel – Stainl. steel, for exh. air														
IP-FBF 125	03126				IP-FBF 160	03128				IP-FBF 180	03131			
Dim. in mm	A	ØB	C	D	Dim. in mm	A	ØB	C	D	Dim. in mm	A	ØB	C	D
	230	157	200	78		265	192	240	97		285	212	260	126
Facade panel – Stainl. steel, for exh. air with additional coating														
IP-FBF 125 B	02901				IP-FBF 160 B	02902				IP-FBF 180 B	02903			
Dim. in mm	A	ØB	C	D	Dim. in mm	A	ØB	C	D	Dim. in mm	A	ØB	C	D
	230	157	200	78		265	192	240	97		285	212	260	126

### IP-FBA



IsoPipe Ø 125 mm				IsoPipe Ø 160 mm				IsoPipe Ø 180 mm			
Type	Ref. no.			Type	Ref. no.			Type	Ref. no.		
Facade panel – Stainl. steel, for intake air											
IP-FBA 125	03125			IP-FBA 160	03127			IP-FBA 180	03130		
Dim. in mm	A	B	C	Dim. in mm	A	B	C	Dim. in mm	A	B	C
	230	200	78		265	240	97		285	260	126
Facade panel – Stainl. steel, for intake air with additional coating											
IP-FBA 125 B	02664			IP-FBA 160 B	02665			IP-FBA 180 B	02666		
Dim. in mm	A	B	C	Dim. in mm	A	B	C	Dim. in mm	A	B	C
	230	200	78		265	240	97		285	260	126

#### ■ Installation

□ Types IP-FKB are universally applicable for horizontal or vertical installation. Exhaust air outlet on the right, left or top.  
The adjacent figure shows horizontal installation in an external wall.

□ Types IP-FBF and IP-FBA for horizontal installation.



## Insulated duct system IsoPipe



The innovative alternative to spiral duct installation with subsequent thermal insulation.

- The insulated round duct system IsoPipe
- prevents condensation,
- has a smooth, sound-absorbing inner surface and is easy to clean,
- saves an enormous amount of installation time,
- is the ideal solution for intake air and exhaust air ducting.

### Installation

- All IsoPipe moulded parts, bends, wall outlets and roof outlets are precisely matched to each other and simply plugged into each other.
- IsoPipe is quick to install:  
Compared to the use of insulated spiral duct, the result is work time savings of up to 70 %.


### Properties

All pipe parts are fully insulated and consist of vapour-tight, anti-static EPE. Flame retardant according to fire class B1. Air flow temperature from –25 to +80 °C.  $\lambda = 0.04 \text{ W/mK}$ ,  $d = 16 \text{ mm}$ .

### Duct concept and installation

- IsoPipe is especially suitable for intake air and exhaust air ducting or supply air and extract air ducting in the basement or low-temperature zone of a KWL system.
- Can be used for volume flows up to 500 m³/h.
- IsoPipe is shock-proof, particularly lightweight and it can easily be shortened to the desired length with a knife.


## IsoPipe duct



Dimensions in mm

IsoPipe Ø 125 mm				IsoPipe Ø 160 mm				IsoPipe Ø 180 mm				IsoPipe Ø 200 mm			
Type	Ref. no.	Ø A	Ø B	Type	Ref. no.	Ø A	Ø B	Type	Ref. no.	Ø A	Ø B	Type	Ref. no.	Ø A	Ø B
<b>Duct with sleeve</b>															
IP 125/2000 <sup>1)</sup>	09406	—	157	—	—	—	—	—	—	—	—	—	—	—	—
<b>Duct with internal connector</b>															
—	—	—	—	IP 160/2000 <sup>2)</sup>	09447	160	192	IP 180/2000 <sup>3)</sup>	09448	180	212	IP 200/2000 <sup>4)</sup>	03810	200	232
<sup>1)</sup> Unit = 8 x 2 m				<sup>2)</sup> Unit = 6 x 2 m				<sup>3)</sup> Unit = 4 x 2 m				<sup>4)</sup> Unit = 3 x 2 m			

## Sleeve / Internal connector




Dimensions in mm

IsoPipe Ø 125 mm					IsoPipe Ø 160 mm					IsoPipe Ø 180 mm					IsoPipe Ø 200 mm				
Type	Ref. no.	Ø A	Ø B	C	Type	Ref. no.	Ø A	Ø B	C	Type	Ref. no.	Ø A	Ø B	C	Type	Ref. no.	Ø A	Ø B	C
Connecting sleeve																			
IP-MU 125	09394	—	157	104	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Internal connector																			
—	—	—	—	—	IP-IV 160	09453	160	—	80	IP-IV 180	09454	180	—	80	IP-IV 200	03811	200	—	80

Made of plastic.


## Bend 45°



Dimensions in mm

IsoPipe Ø 125 mm					IsoPipe Ø 160 mm					IsoPipe Ø 180 mm					IsoPipe Ø 200 mm																	
Type	Ref. no.	Ø A	Ø B	C	Type	Ref. no.	Ø A	Ø B	C	Type	Ref. no.	Ø A	Ø B	C	Type	Ref. no.	Ø A	Ø B	C													
Bend 45° with sleeve																																
IP-B 125/45					09399	125	157	255	—	—					—	—																
Bend 45° with int. connector																																
—					—	IP-B 160/45					09449	160	192	242	IP-B 180/45					09450	180	212	256	IP-B 200/45					03809	200	232	270


## Bend 90°




Dimensions in mm

IsoPipe Ø 125 mm					IsoPipe Ø 160 mm					IsoPipe Ø 180 mm					IsoPipe Ø 200 mm																	
Type	Ref. no.	Ø A	Ø B	C	Type	Ref. no.	Ø A	Ø B	C	Type	Ref. no.	Ø A	Ø B	C	Type	Ref. no.	Ø A	Ø B	C													
Bend 90° with sleeve																																
IP-B 125/90					09398	125	157	239	—	—	—	—	—	—	—	—	—	—	—													
Bend 90° with int. connector																																
—					—	IP-B 160/90					09451	160	192	272	IP-B 180/90					09452	180	212	292	IP-B 200/90					03808	200	232	312


### Tape / Pipe clamp




### Fittings for unit connection




### Fittings for distribution box



### Fittings for KWL HygroBox and ground heat exchange



### Roof outlets



### Silencer



IsoPipe Ø 125 mm			IsoPipe Ø 160 mm			IsoPipe Ø 180 mm			IsoPipe Ø 200 mm		
Type	Ref. no.	Ø B	Type	Ref. no.	Ø B	Type	Ref. no.	Ø B	Type	Ref. no.	Ø B
Tape, insulated, 50x3 mm, 15 lin. m											
IP-KLB	09643		IP-KLB	09643		IP-KLB	09643		IP-KLB	09643	
Pipe clamp											
IP-S 125	09395	157	IP-S 160	09392	192	IP-S 180	09421	212	IP-S 200	03812	232

IsoPipe Ø 125 mm			IsoPipe Ø 160 mm			IsoPipe Ø 180 mm			IsoPipe Ø 200 mm		
Type	Ref. no.	Ø A B	Type	Ref. no.	Ø A B	Type	Ref. no.	Ø A B	Type	Ref. no.	Ø A B
Connector with seal for connection to KWL units – with sleeve DN 125											
RVBD 125 K <sup>1)</sup> 03414	125	70	—	—	—	—	—	—	—	—	—
Connector with seal for connection to KWL units – with sleeve DN 160											
—	—	—	RVBD 160 K <sup>2)</sup> 03415	160	70	RVBD 180/160 <sup>2)</sup> 09589	180	160	—	—	—
Connector with seal for											
—	—	—	—	—	—	—	—	—	RVBD 200 K	03813	200 70

All fittings made of galvanised steel sheet.  
<sup>1)</sup> Compatible with KWL EC 170 W, KWL EC 200 W, KWL EC 300 W and KWL EC 220 D.  
<sup>2)</sup> Compatible with KWL EC 500 W and KWL EC 340 D.

IsoPipe Ø 125 mm			IsoPipe Ø 160 mm			IsoPipe Ø 180 mm			IsoPipe Ø 200 mm		
Type	Ref. no.	Ø A Ø B	Type	Ref. no.	Ø A Ø B	Type	Ref. no.	Ø A Ø B	Type	Ref. no.	Ø A Ø B
Fitting for connection to distribution boxes – with connector DN 125											
Direct duct connection	—	—	IP-ARZ 125/160	09458	160 125	—	—	—	—	—	—
Fitting for connection to distribution boxes – with connector DN 160											
IP-ARZ 160/125	09358	125 160	Direct duct connection	—	—	IP-ARZ 160/180	09459	180 160	IP-ARZ 160/200	03816	200 160
Fitting for connection to distribution boxes – with connector DN 180											
IP-ARZ 180/125	09360	125 180	IP-ARZ 180/160	09455	160 180	Direct duct connection	—	—	IP-ARZ 180/200	03814	200 180

All fittings made of galvanised steel sheet.

IsoPipe Ø 125 mm			IsoPipe Ø 160 mm			IsoPipe Ø 180 mm			IsoPipe Ø 200 mm		
Type	Ref. no.	Ø A Ø B	Type	Ref. no.	Ø A Ø B	Type	Ref. no.	Ø A Ø B	Type	Ref. no.	Ø A Ø B
Fitting for connection to KWL HygroBox – KWL HB 250, connec. DN 160											
IP-ARZ 160/125	09358	125 160	Direct duct connection	—	—	—	—	—	IP-ARZ160/200	03816	200 160
Fitting for connection to KWL HygroBox – KWL HB 500, connec. DN 250											
—	—	—	IP-ARZ 250/160	09590	160 250	IP-ARZ 250/180	09591	180 250	IP-ARZ 250/200	03815	200 250
Fitting for connection to ground heat exchanger – LEWT, connector DN 200											
IP-ARZ 200/125	09359	125 200	IP-ARZ 200/160	09456	160 200	IP-ARZ 200/180	09457	180 200	Direct duct connection	—	—
Fitting for connection to ground heat exchanger – SEWT, connector DN 180											
IP-ARZ 180/125	09360	125 180	IP-ARZ 180/160	09455	160 180	Direct duct connection	—	—	IP-ARZ 180/200	03814	200 180

All fittings made of galvanised steel sheet.

IsoPipe Ø 125 mm			IsoPipe Ø 160 mm			IsoPipe Ø 180 mm		
Type	Ref. no.	Ø B Ø C	Type	Ref. no.	Ø B Ø C	Type	Ref. no.	Ø A Ø C
Roof outlet, consisting of hood and pan tile* – Roof hood black								
IP-DHS 125	03541	157 160	IP-DHS 160	03542	192 250	IP-DHS 180	03542	180 210
Roof outlet, consisting of hood and pan tile* – Roof hood including duct red								
—	—	—	IP-DHR 160	03543	192 250	IP-DHR 180	03543	180 210
Roof outlet, consisting of hood and pan tile* – Roof pan tile for pitched roofs, with lead edge								
IP-UDPS 125	03546	α 25°– 45°	IP-BP 160/25	09384	α 20°– 30°	IP-BP 180/25	09384	α 20°– 30°
—	—	—	IP-BP 160/35	09385	α 30°– 40°	IP-BP 180/35	09385	α 30°– 40°
—	—	—	IP-BP 160/45	09386	α 40°– 50°	IP-BP 180/45	09386	α 40°– 50°
Roof outlet, consisting of hood and pan tile* – Roof pan tile for flat roof								
IP-FDP 125	03544	— 158	IP-FDP 160	03545	— 203	IP-FDP 180	03545	— 203

\*Please order roof hoods and pan tiles separately.

IsoPipe Ø 125 mm			IsoPipe Ø 160 mm			IsoPipe Ø 180 mm		
Type	Ref. no.		Type	Ref. no.		Type	Ref. no.	
Flexible duct silencer, made of aluminium duct, Length approx. 1 m, elastic								
SDE 125	00789		SDE 160	00790		SDE 180	00499	
Type	Insulation mm	Insertion loss D <sub>e</sub> dB at Hz						
		125	250	500	1000	2000	4000	8000
SDE 125	50	32	42	45	46	50	42	41
SDE 160	50	23	40	43	46	46	31	29
SDE 180	50	20	39	43	47	46	28	29

**Air distribution system renopipe**



The smart solution, specifically developed for energy-saving renovation: **renopipe** combines ducting and ventilation duct cladding in one component.

- Quick, easy installation, even in occupied buildings.
- Installation without rework possible in drywall construction.
- Minimisation of material usage and costs.
- Cost-effective due to few components and elimination of exhaust air piping.

**■ Installation**

- The RP moulded parts can be easily shortened to the desired length with a fine-toothed saw.
- Visible installation in ceilings or walls by clicking the long connector into the mounting brackets included in the delivery.
- Free cuts in the duct compensate for unevenness, miter cuts are unnecessary due to precision-fit moulded parts. Fastening elements with longitudinal, lateral and height compensation guarantee a precise fit.

**■ Properties and advantages**

- Coatable components made of smooth, high-density EPS in white.
- Quick visible installation, without elaborate ceiling suspensions and drywall construction work.

**■ Duct concept, installation**


- The extract air from the adjoining extract air rooms is collected directly in the sound-insulated combination distributor. There is no extract air piping or separate silencers.
- Asymmetric lip seals ensure the leak tightness of the entire renopipe system.

**Combination distribution box, supply air right**

Compact distributor made of galvanised steel sheet with sound-absorbing lining of inner sides. Properties: Extract air collector, supply air distributor with sound insulation function. Unit connection 2 x DN 125, 2 x DN 100 for extract air, 2 x DN 100 for supply air. Incl. inspection opening and cover.


**RP-KVK 3-100/125 R** No. 03048

**Combination distributor**



Dimensions in mm

**Duct piece**



**Duct** Unit = 4 pcs.\*

Duct with smooth, square profile. Internal diameter DN 100, length 1 m.

**RP-K** Ref. no. 03061

**Duct with stucco profile**

Unit = 4 pcs.\*  
Like above but with visually appealing stucco profile.


**RP-SK** Ref. no. 03065

**Combination distribution box, supply air left**


Compact distributor made of galvanised steel sheet with sound-absorbing lining of inner sides. Properties: Extract air collector, supply air distributor with sound insulation function. Unit connection 2 x DN 125, 2 x DN 100 for extract air, 2 x DN 100 for supply air. Incl. inspection opening and cover.

**RP-KVK 3-100/125 L** No. 03038

**Combination distributor**



**T-piece**



**T-piece** Unit = 4 pcs.\*

Compact T-piece with smooth, square profile. Internal diameter DN 100/100/100.

**RP-T** Ref. no. 03062

**T-piece with stucco**

Unit = 4 pcs.\*  
Like above but with visually appealing stucco profile.


**RP-ST** Ref. no. 03066

**Long connector set**


Consists of a connecting sleeve DN 100 made of impact-resistant polypropylene and two lip seals for airtight connection of the duct. Includes mounting bracket for simple click installation of the duct.

**RP-LV** Ref. no. 03029

**Long connector set**



**Inner angle**



**Inner angle** Unit = 2 pcs.\*

90° inner angle with smooth, square profile. Internal diameter DN 100.

**RP-IW** Ref. no. 03075

**Inner angle with stucco**

Unit = 2 pcs.\*  
Like above but with visually appealing stucco profile.


**RP-SIW** Ref. no. 03077

**Long connector set**


Consists of a connecting sleeve DN 100 made of impact-resistant polypropylene and two lip seals for airtight connection of the duct. Includes mounting bracket for simple click installation of the duct.

**RP-KV** Ref. no. 03030

**Short connector**



**Outer angle**



**Outer angle** Unit = 2 pcs.\*

90° outer angle with smooth, square profile. Internal diameter DN 100.

**RP-AW** Ref. no. 03076

**Outer angle with stucco**

Unit = 2 pcs.\*  
Like above but with visually appealing stucco profile.

**RP-SAW** Ref. no. 03078

\* Delivered in packaging units.

### Design ventilation valve

Design ventilation valve for extract air operation, DN 100, adjustable. With closed front and integrated filter.


**DLV 100** Ref. no. 03039

### Replacement


**air filter** Unit = 5 pcs.\*

**ELF-DLV 100** Ref. no. 03042

### Ventilation valve



### Cutting aid



### Cutting aid

Stable cutting aid, beech multiplex 15 mm, for easy cutting of duct to length.


**RP-SH** Ref. no. 03036

### Design ventilation valve, for supply air


Design ventilation valve for supply air operation, DN 100.

**DLVZ 100** Ref. no. 03040

### Ventilation valve



### Fine-toothed saw



### Fine-toothed saw

Special fine-toothed handsaw for precise cuts.

**RP-FS** Ref. no. 03044

### Facade combination panel


For intake air and exhaust air ducts. Universally applicable. Elegant, made of high-quality stainless steel. Connection DN 125.

**IP-FKB 125** Ref. no. 02689


With additional coating for use in environments with severe air pollution or high salt concentration in the air.

**IP-FKB 125 B** Ref. no. 02661

### Facade combination panel



### Bracket



### Mounting bracket

Unit = 5 pcs.\*  
Made of high-quality, impact-resistant plastic.

**RP-BK** Ref. no. 03031

### Exhaust air panel


Elegant, made of high-quality stainless steel. Connection DN 125.

**IP-FBF 125** Ref. no. 03126


With additional coating for use in environments with severe air pollution or high salt concentration in the air.

**IP-FBF 125 B** Ref. no. 02901

### Exhaust air panel



### Seal



### Lip seal

Unit = 10 pcs.\*  
DN 100 made of EPDM.

**RP-LD** Ref. no. 03033

### Intake air panel


Elegant, made of high-quality stainless steel. Connection DN 125.

**IP-FBA 125** Ref. no. 03125


With additional coating for use in environments with severe air pollution or high salt concentration in the air.

**IP-FBA 125 B** Ref. no. 02664

### Intake air panel



### End/inspection cover



### End/inspection cover

DN 100 made of high-quality plastic, with lip seal. For attachment to arm duct end piece.


**RP-RD** Ref. no. 03037

### Wall sleeve


DN 100 made of PVC, incl. mounting template for simple wall outlet.

**RP-WH** Ref. no. 03035

### Wall sleeve



### Reducer



### Reducer

Made of galvanised steel sheet.

**RP-RZ 125/100** Ref. no. 03017

\* Delivered in packaging units.

## Flat duct system FK



Underfloor duct system made of galvanised steel sheet, specifically developed for domestic ventilation. The optimal solution for concealed air ducts; ideal for air distribution in new buildings.

### Properties

- All components made of galvanised steel sheet, corrosion-resistant and non-flammable.


### Available in two sizes

- FK 150 x 50 mm for volume flows up to 90 m<sup>3</sup>/h.
- FK 200 x 50 mm for volume flows up to 140 m<sup>3</sup>/h.

### Duct concept and installation

- Flat design and rigid construction allow easy installation in unfinished flooring.
- Connection using external connector. Moulded parts with integrated sleeve (insertion depth approx. 35 mm). The smooth internal walls result in low flow resistances and do not create obstacles for dirt deposits. Cleaning (disinfection) is still possible.
- The distribution box, which must be installed per floor for extract and supply air delivery, simplifies the duct layout.
- Flat silencers (FK-SD) can be installed in the duct system to protect noise-sensitive rooms, e.g. bedrooms.

## Flat duct




Dimensions in mm

## Flat duct

Type	Ref. no.	Width	Height	Length
<b>150 x 50 mm</b>				
FK 150	02905	150	50	1500
<b>200 x 50 mm</b>				
FK 200	02906	200	50	1500

## Bend, horizontal 45°



## Bend, horizontal 45°

Type	Ref. no.	Width	Height	Radius
<b>150 x 50 mm</b>				
FK-BH 150/45	02910	153	53	45°
<b>200 x 50 mm</b>				
FK-BH 200/45	02912	203	53	45°


## Connector



## Connector

Type	Ref. no.	Width	Height	Length
<b>150 x 50 mm</b>				
FK-V 150	02941	153	53	200
<b>200 x 50 mm</b>				
FK-V 200	02942	203	53	200


## Bend, vertical 90°



## Bend, vertical 90°

Type	Ref. no.	Width	Height	Radius
<b>150 x 50 mm</b>				
FK-BV 150/90	02919	153	103	90°
<b>200 x 50 mm</b>				
FK-BV 200/90	02920	203	103	90°


## Mounting bracket



## Mounting bracket

Type	Ref. no.	Width	Height	Length
<b>150 x 50 mm</b>				
FK-B 150	02907	151	52	30
<b>200 x 50 mm</b>				
FK-B 200	02908	201	52	30


## Bend, vertical 45°



## Bend, vertical 45°

Type	Ref. no.	Width	Height	Radius
<b>150 x 50 mm</b>				
FK-BV 150/45	02917	153	73	45°
<b>200 x 50 mm</b>				
FK-BV 200/45	02918	203	73	45°


## Bend, horizontal 90°



## Bend, horizontal 90°

Type	Ref. no.	Width	Height	Radius
<b>150 x 50 mm</b>				
FK-BH 150/90	02909	153	53	90°
<b>200 x 50 mm</b>				
FK-BH 200/90	02911	203	53	90°


## Y-branch



## Y-branch

Type	Ref. no.	Dim. in mm	
		A	B C
<b>150 x 50 mm</b>			
FK-Y 150/150/150	02927	153	153 153
<b>200 x 50 mm</b>			
FK-Y 200/150/150	02929	153	153 203

### T-piece




Dimensions in mm

### T-piece

Type	Ref. no.	Dim. in mm	A	B	C	E
FK-T 150/150/150	02921	153	153	153	250	
FK-T 150/150/200	02923	153	153	203	390	
FK-T 150/200/150	02926	153	203	153	300	
FK-T 200/150/200	02925	203	153	203	250	
FK-T 150/200/200	02924	153	203	203	440	
FK-T 200/200/200	02922	203	203	203	300	


### Transition piece



### Transition piece

Type	Ref. no.	Dim. in mm	A	Ø B	C
150 x 50 mm					
FK-Ü 75/150	02948	153	78	260	
FK-Ü 100/150	02996	153	103	260	
200 x 50 mm					
FK-Ü 100/200	02997	203	103	260	
FK-Ü 125/200	02998	203	128	260	


### Reducers



### Reducers

Type	Ref. no.	Dim. in mm	Length	Height
Reducer symmetrical				
FK-RS 200/150	02932	260	53	
Reducer asymmetrical				
FK-RA 200/150	02933	260	53	


### Outlet



### Ceiling/wall outlet

Type	Ref. no.	Colour	Dim. in mm	A	B
200 x 50 mm					
FK-WA 200 W	09350	White	250	103	
FK-WA 200 AL	09351	Alum.	250	103	


### End piece – Spiral duct



### End piece with connection for spiral duct

Type	Ref. no.	Dim. in mm	Ø D	L
150 x 50 mm				
FK-ER 150/100	02934	99	200	
FK-ER 150/125	02935	124	200	
200 x 50 mm				
FK-ER 200/160	02936	159	220	


### Silencer



### Silencer

Type	Ref. no.	Dim. in mm	A	B
150 x 50 mm				
FK-SD 150	02945	153	53	
200 x 50 mm				
FK-SD 200	02946	203	53	


### End piece – Valve



### End piece with connection for spiral duct

Type	Ref. no.	Dim. in mm	Ø D	L
150 x 50 mm				
FK-EV 150/100	02937	102	200	
FK-EV 150/125	02938	127	200	
200 x 50 mm				
FK-EV 200/100	02939	102	200	
FK-EV 200/125	02940	127	200	


### Distribution box



### Distribution box

Type	Ref. no.
FK-VK	02987
Delivery FK-VK	
4 connectors 150 x 50 (2 enclosed loose),	
1 connectors 200 x 50 and 1 inspection panel.	
Add. connectors for straight distributor	
FK-ZS	02947

### Inspection piece




### Inspection piece

Type	Ref. no.	Dim. in mm	A	B	C	D	L
150 x 50 mm							
FK-RZ 150	02930	153	53	347	137	500	
200 x 50 mm							
FK-RZ 200	02931	203	53	347	137	500	

Dim. E can vary from 105-130 mm.


### End cover



### End cover

Type	Ref. no.
150 x 50 mm	
FK-ED 150	02943
200 x 50 mm	
FK-ED 200	02944

### Floor grille




### Aluminium floor grille with inst. casing

Type	Ref. no.	Dim. in mm	A	B	C	D	L
150 x 50 mm							
FK-BA 150	02986	153	53	348	152	500	

Dim. E can vary from 112-152 mm.

### Sealing tape



### Sealing tape/Tape

Type	Ref. no.
Cold shrink tape	
KSB	09343 50 mm wide, 15 lin. m
Aluminium cold shrink tape	
KSB ALU	09344 50 mm wide, 15 lin. m
Tape	
KLB	00619 50 mm wide, 20 lin. m

## Extract air elements



## Design ventilation valves and disc valves

DLV: modern, square design, with closed front and integrated filter. Can be used for supply and extract air.

KTVA/MTVA: classic round shape, especially for extract air.

## Supply air elements



## Design ventilation valves and disc valves

DLV: modern, square design, with discreet supply air grille and integrated filter.

KTVZ/KTVZ: classic round shape, closed front, especially for supply air.

LGK 80: Ventilation grille made of white plastic. For insertion in 80 mm spiral ducts or FRS-VM 75.

## Supply air-extract air valve ZAV



## Supply air-extract air valve ZAV

Elegant plastic valve for wall and ceiling installation.

Can be used as a supply air element with an open front grille and as an extract air element with a closed front grille.

## Attachment filter element VFE



## Attachment filter element VFE

For installation in front of disc valves for greasy, contaminated room air. Prevents grease and dirt deposits.

Casing made of galvanised steel sheet, white, plastic powder-coated. Filter made of dimensionally stable aluminium filter fabric with 324 cm² free filter surface and aluminium frame.

## Door ventilation grilles



## Door ventilation grilles

Unobtrusive, sight screening ventilation grille made of break-resistant plastic for installation in door leaf.

See product page for detailed description.

## Cleaning set



**Cleaning set for air distribution systems flexpipe and renopipe.** The universal cleaning set KWL-RS is ideally suitable for cleaning the **flexpipe** duct systems (DN 75, DN 63) and the **renopipe** air distribution system (DN 100).

Application is possible either by pushing (for short distances) or pulling. In case of longer duct sections or narrow bends, the round nylon brush is simply pulled in the

Ø 80		Ø 100		Ø 125		Ø 160	
Type	Ref. no.	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
<b>Design ventilation valve DLV<sup>1)</sup> for extract air</b>							
	<b>DLV 100</b>	03039		<b>DLV 125</b>	03049		
	<b>ELF-DLV 100<sup>2)</sup></b>	03042		<b>ELF-DLV 125<sup>2)</sup></b>	03058		
<b>Plastic disc valve KTVA</b>							
<b>KTVA 75/80</b>	00940	<b>KTVA 100</b>	00941	<b>KTVA 125</b>	00942	<b>KTVA 160</b>	00943
<b>Metal disc valve for extract air</b> (for areas where non-flammable components are compulsory)							
<b>MTVA 75/80</b>	08868	<b>MTVA 100</b>	08869	<b>MTVA 125</b>	08870	<b>MTVA 160</b>	08871

<sup>1)</sup> With integrated filter.

<sup>2)</sup> Replacement air filter for DLV, unit = 5 pcs.

Ø 80		Ø 100		Ø 125		Ø 160	
Type	Ref. no.	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
<b>Ventilation grille LGK, Design ventilation valve DLV for supply air</b>							
<b>LGK 80</b>	00259	<b>DLVZ 100</b>	03040	<b>DLV 125</b>	03049		
				<b>ELF-DLV 125<sup>1)</sup></b>	03058		
<b>Plastic disc valve KTVZ</b>							
<b>KTVZ 80</b>	02762	<b>KTVZ 100</b>	02736	<b>KTVZ 125</b>	02737	<b>KTVZ 160</b>	02738
<b>Metal disc valve for supply air</b> (for areas where non-flammable components are compulsory)							
<b>MTVZ 75/80</b>	09603	<b>MTVZ 100</b>	09604	<b>MTVZ 125</b>	09605	<b>MTVZ 160</b>	09606

<sup>1)</sup> Replacement air filter for DLV 125, unit = 5 pcs.

Ø 80		Ø 100		Ø 125		Ø 160	
Type	Ref. no.	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
<b>Plastic valve for supply and extract air ZAV</b>							
<b>ZAV 80</b>	03079			<b>ZAV 125</b>	03080		

**VFE 70** Ref. no. 02552

**VFE 90** Ref. no. 02553

**ELF/VFE** Ref. no. 02554

Replacement air filter, unit = 2 pcs.

**LTGW** Ref. no. 00246

Made of plastic, white.

**LTGB** Ref. no. 00247

Made of plastic, brown.

direction of the distribution box, where the 90° bend is used for the intake connection. This is used to easily remove the dust loosened by the round nylon brush with a commercially available vacuum cleaner.

Delivered in a practical transport bag.

Delivery: Per 1 pc.

- Reel with flexible GFK wire (20 m)
- Round brushes DN 63, 75, 100
- 90° bend and seal for intake connection DN 56
- Adapter DN 56/40, DN 56/32.

**KWL-RS** Ref. no. 02797

### Silencer SDE



Flexible duct silencer, made of aluminium duct, Length approx. 1 m, elastic

Ø 125		Ø 160		Ø 180	
Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
SDE 125	00789	SDE 160	00790	SDE 180	00499

Type	Best.-Nr.	Insulation mm	Insertion loss D <sub>s</sub> dB at Hz						
			125	250	500	1000	2000	4000	8000
SDE 125	00789	50	32	42	45	46	50	42	41
SDE 160	00790	50	23	40	43	46	46	31	29
SDE 180	00499	50	20	39	43	47	46	28	29

### Silencer FSD / RSD



Flexible cross talk silencer FSD, duct silencer RSD – Galvanised steel sheet

Ø 100	Ø 125	Ø 160	Ø 200	Ø 250	Ø 315	Ø 355	Ø 400
—	FSD 125 00677	FSD 160 00678	FSD 200 00679	FSD 250 00680	FSD 315 00681	FSD 355 00682	FSD 400 00683
—	—	—	—	RSD 250 08739	RSD 315 08745	RSD 355 08748	RSD 400 08751

Type	Ref. no.	Dimensions in mm					Insertion loss D <sub>s</sub> dB at Hz				Weight approx. kg	Average loss
		L	Ø D	Ø d	a	l	250	500	1000	2000		
FSD 125	00677	1000	236	125	34	54	13	22	39	42	1.7	18
FSD 160	00678	1000	262	160	34	54	10	21	39	30	1.9	16
FSD 200	00679	1000	312	200	34	54	8	16	32	22	2.4	12

For further diameters and sound insulation data, see Helios main catalogue.

### Shutters



Ø 100	Ø 125	Ø 160	Ø 200	Ø 250	Ø 315	Ø 355	Ø 400
-------	-------	-------	-------	-------	-------	-------	-------

Cold smoke shutter

KAK 100 04097	KAK 125 04098	KAK 160 04099	KAK 200 04100
---------------	---------------	---------------	---------------

Duct shutters – Self-actuating or \*\*motorised, installed in pipeline, casing made of galvanised steel sheet or \*plastic

RSKK* 100 05106	RSKK* 125 05107	RSK 160 05669	RSK 200 05074	RSK 250 05673	RSK 315 05674	RSK 355 05650	RSK 400 05651
				RVM** 250 02576	RVM** 315 02578	RVM** 355 02579	RVM** 400 02580

Flexible connecting sleeve – For acoustic decoupling, incl. 2 pcs. hose clamps

FM 100 01681	FM 125 01682	FM 160 01684	FM 200 01670	FM 250 01672	FM 315 01674	FM 355 01675	FM 400 01676
--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------

### Flexible connecting sleeve



### Warm water heating element



		Compatible with duct	Air-side data					Water-side data <sup>1)</sup>		Weight	Compatible temperature control system	
Type	Ref. no.		Ø mm	Heat output		Δ T air		at V̇	Pressure loss		with water volume	Type
WHR 125	09480	125	2.6	1.1	29	13	250	2	115	3.2	WHST 300 T50	08820
WHR 160	09481	160	5.5	3.1	38	22	400	11	245	4.9	WHST 300 T50	08820
WHR 200	09482	200	7.2	4.1	33	19	600	17	317	4.9	WHST 300 T50	08820
WHR 250	09483	250	10.7	6.0	37	21	800	8	470	6.9	WHSHE 24 V	08318
WHR 315	09484	351	18.3	10.4	36.2	21	1400	9	810	9.0	WHSHE 24 V	08318
WHR 400	09524	400	26.2	15.0	36	21	2000	11	1060	12.5	WHSHE 24 V	08318

### Air temperature control



**Air temperature control for KWL units with PWW post-heater.**  
For air heating control of the PWW post-heater integrated in KWL WW types. Consists of thermostat with remote adjustment and remote sensor. Simple, cost-effective and quick-to-install solution.  
Temperature range 8 – 38 °C.  
**WHST 300 T38** Ref. no. 08817

### Air temperature control



**Air temperature control for warm water heating element WHR.**  
**Ideal for use as supply air heater.**  
Consists of thermostat incl. duct temperature sensor (with 2 m capillary tube) and valve. Provides a constant supply air temperature. Simple, cost-effective and quick-to-install solution.  
Temperature range 20 – 50 °C.  
**WHST 300 T50** Ref. no. 08820

### Hydraulic unit



**Hydraulic unit**  
Controls the water temperature of the PWW heating element using a three-way valve actuator 24 V (0-10 V) and thus the heat output transferred to the air. Delivered as a complete unit, incl. VL-/RL temperature display, circulating pump and flexible connection hoses.

**WHSHE 24 V (0-10V)** No. 08318

**WHR:** The values apply for supply air temp. 0 °C and flow/return temperatures: <sup>1)</sup> 90/70 °C, <sup>2)</sup> 60/40 °C.

## KWL HBX



Designed specifically for ventilation systems in residential buildings and offices, the Helios HygroBox automatically guarantees a healthy feel-good atmosphere with ideal air humidity throughout the year.

### Advantages

- ☐ Constant indoor climate with ideal moisture content.
- ☐ Prevention of expensive damage to furniture, wooden floor coverings and antiques.
- ☐ Alleviation of allergy symptoms and health impacts. Strengthening of the immune system by reducing the lifetime of bacteria and viruses.
- ☐ Reduction of fine dust and electrostatic charges.

### Special HygroBox features

- ☐ Constant supply air humidity and temperature in all rooms.
- ☐ The principle of natural evaporation prevents excessive humidification.
- ☐ Hygienically safe due to UVC disinfection.
- ☐ Fully automated operation with automatic summer deactivation.
- ☐ Low-maintenance and easy to install.
- ☐ Low operating costs through the use of evaporation energy from the existing heating system.

### Functional principle

The HygroBox is an active humidification unit for integration in new or existing KWL ventilation units with heat recovery. The fresh intake air flows through the KWL unit heat exchanger and absorbs the thermal energy from the extract air. This preheated air is then delivered to the HygroBox, where active and automatic humidification takes place according to the principle

of natural evaporation. A bladed rotor rotates continuously in a water bath inside the unit and releases water molecules into the preheated supply air via the wetted blade surface. Regardless of the KWL unit operating level and external weather influences, the HygroBox constantly maintains the preselected relative air humidity and thus guarantees a healthy feel-good atmosphere with ideal moisture content.

### Delivery

Delivered as a plug-in compact unit including water supply hoses and water filter.


### Heating element

- ☐ The HygroBox is equipped with a warm water (WW types) or electric heating element (EH types). This heats the supply air before humidification and thereby guarantees the required evaporation energy and pleasant supply air temperature.
- ☐ With regard to heating systems with low flow temperature (e.g. heat pumps), a low-temperature heating element (type KWL-NHR, accessories, see right page) must be connected downstream of the HygroBox.


### Summer operation

- ☐ The HygroBox automatically switches to standby mode when the moisture content of the intake air is sufficiently high (e.g. in summer). In this state, there is no water in the unit and the remains at a standstill.


## Dimensions KWL HBX 250.. L

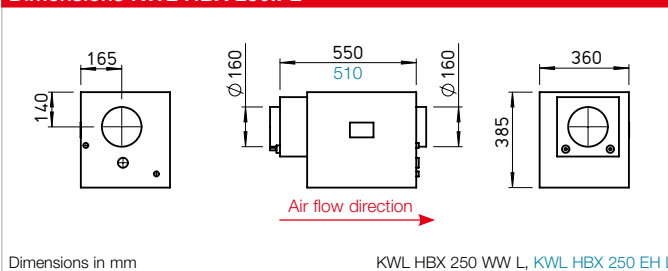


## Dimensions KWL HBX 500.. L

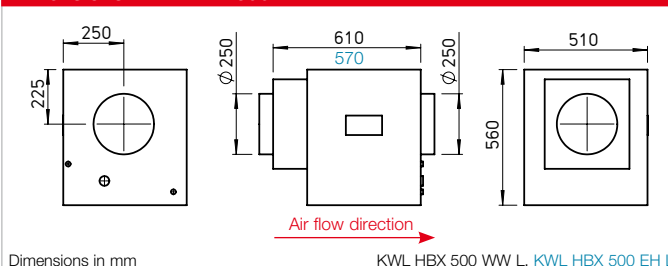

## Pressure loss KWL HBX

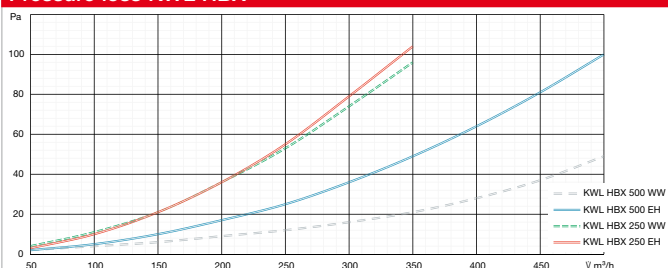

## Schematic diagram KWL HBX.. WW R

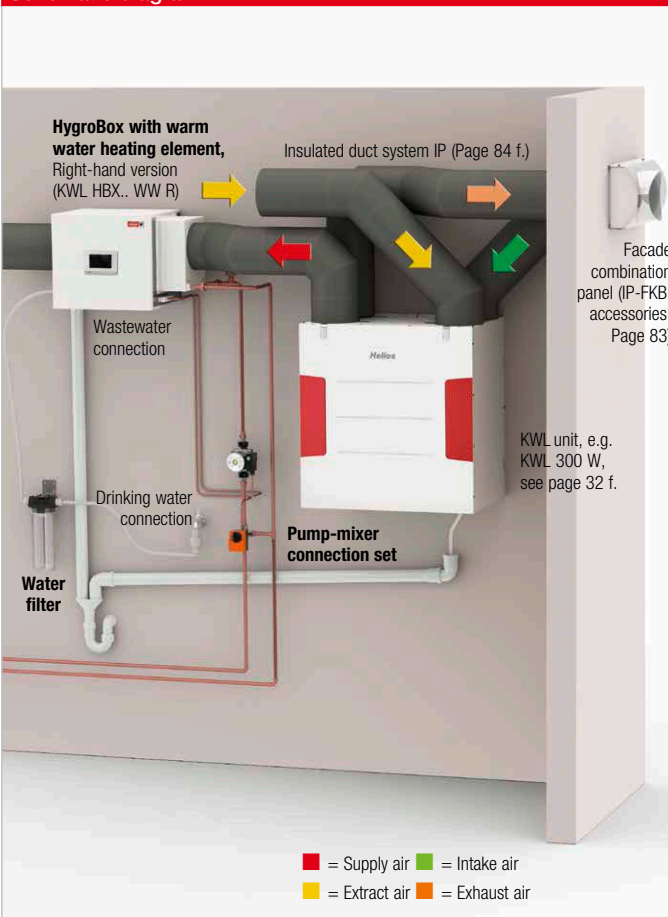

#### KWL-NHR



#### Low-temperature heating element (for KWL HBX.. WW)

##### Description

- The additional installation of a post-heating element on the HygroBox air outlet is recommended in combination with low-temperature heaters to compensate for the evaporative cooling.
- The external temperature sensor, which is included in the delivery of the post-heating element, must be installed in the supply air duct at a distance of approx. 50 cm behind the post-heating element.

##### Accessories

#### Low-temperature post-heating element

- for KWL HBX 250 WW  
**KWL-NHR 250** Ref. no. 05628
- for KWL HBX 500 WW  
**KWL-NHR 500** Ref. no. 05633

#### KWL-PMAS



#### Pump-mixer connection set (for KWL HBX.. WW)

##### Description

- For connection of the HygroBox to existing heating circuits.
- Consists of:
  - 1 pc. circulating pump 230 V
  - 2 pc. screw fittings, R 1/2a/15 mm MS (brass)
  - 1 pc. 3-way mixer valve with actuator 24 V (0-10 V), Rp1/2", DN 15.

##### Accessories

#### Pump-mixer connection set

- for KWL HBX 250 WW  
**KWL-PMAS 250** Ref. no. 40193
- for KWL HBX 500 WW  
**KWL-PMAS 500** Ref. no. 40194

#### KWL-UVR, KWL-OME



#### Replacement UVC ducts and osmosis membrane (for all types)

##### Description

- Helios HygroBoxes are equipped with a constant, automatically monitored UVC disinfection system which effectively kills all germs and bacteria.
- In addition, the water in the evaporator tray is automatically changed depending on the water hardness and evaporation performance.
- A reverse osmosis unit protects the unit against limescale deposits.
- The hygienic safety of the HygroBox is documented and certified by experts.

##### Accessories

#### Replacement UVC ducts

**KWL-UVR** Ref. no. 05631

#### Replacement osmosis membrane

**KWL-OME** Ref. no. 05632

#### KWL-WF



#### Replacement water filter (for all types)

- As a general rule, the water filter in the water supply pipe must be replaced every 6 months. The filter replacement is indicated on the HygroBox display.

##### Accessories

Replacement water filter  
Unit = 1 pc. filter cartridge  
(without casing, without hoses)

**KWL-WF** Ref. no. 05630

#### Technical data

	With electric heating element For KWL units up to 250 m³/h flow rate		For KWL units up to 500 m³/h flow rate		With warm water heating element For KWL units up to 250 m³/h flow rate		For KWL units up to 500 m³/h flow rate	
	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
<b>Right-hand version</b> (air outlet right)	<b>KWL HBX 250 EH R</b>	40188	<b>KWL HBX 500 EH R</b>	40192	<b>KWL HBX 250 WW R</b>	40186	<b>KWL HBX 500 WW R</b>	40190
<b>Left-hand version</b> (air outlet left)	<b>KWL HBX 250 EH L</b>	40187	<b>KWL HBX 500 EH L</b>	40191	<b>KWL HBX 250 WW L</b>	40185	<b>KWL HBX 500 WW L</b>	40189
Adjustable relative supply air humidity in %	40-60		40-60		40-60		40-60	
Adjustable supply air temperature °C	15-25		15-25		15-25		15-25	
Air volume flow m³/h	350		500		350		500	
Power consumption max. W	1450		2850		100		100	
Heat output W	1400		2800		2000		4200	
Voltage/Frequency	230 V~, 50 Hz		230 V~, 50 Hz		230 V~, 50 Hz		230 V~, 50 Hz	
Water connection	3/4"		3/4"		3/4"		3/4"	
Water drain Ø mm	40-50		40-50		40-50		40-50	
Weight (empty weight/operating weight) approx. kg	25		47		25/28		47/53	
<b>Accessories</b>								
Pump-mixer connection set	—		—		<b>KWL-PMAS 250</b>		<b>KWL-PMAS 500</b>	
Ref. no.	—		—		40193		40194	
Low-temperature post-heating element	—		—		<b>KWL-NHR 250</b>		<b>KWL-NHR 500</b>	
Ref. no.	—		—		05628		05633	
UVC ducts	<b>KWL-UVR</b>		<b>KWL-UVR</b>		<b>KWL-UVR</b>		<b>KWL-UVR</b>	
Ref. no.	05631		05631		05631		05631	
Water filter	<b>KWL-WF</b>		<b>KWL-WF</b>		<b>KWL-WF</b>		<b>KWL-WF</b>	
Ref. no.	05630		05630		05630		05630	
Osmosis membrane	<b>KWL-OME</b>		<b>KWL-OME</b>		<b>KWL-OME</b>		<b>KWL-OME</b>	
Ref. no.	05632		05632		05632		05632	

## SEWT kit



The ground-to-brine heat exchanger SEWT significantly increases the efficiency of ventilation units with heat recovery! SEWT saves even more energy and minimises heating costs. The optimal addition for ventilation units with heat recovery.

#### Advantages

- ☐ Additional preheating and prevention of icing during the cold season.
- ☐ Pleasant "natural cooling" on hot days.
- ☐ Complete kit with coordinated components.

#### Functional principle

The ground-to-brine heat exchanger SEWT utilises the ground temperature which is relatively constant throughout the year. The ground collector pipe is installed and laid in the ground at a depth of approx. 1.2 m. The hydraulic unit ensures the circulation of the brine depending on the outdoor temperature. The brine serves as a heat transfer medium and releases the heat to the supply air through the heat exchanger module.

■ This results in the following:

- ☐ During the cold season  
The preheating of cold intake air of up to 14 K. Thus, the intake air is normally at a temperature above 0 °C when it reaches the ventilation unit with heat recovery (anti-icing operation). This results in a higher supply air temperature and a positive effect on the total energy balance. Post-heating is only necessary in case of very low outdoor temperatures.

#### ☐ On hot summer days

The ground-to-brine heat exchanger reduces the intake air temperature.

#### ☐ During the transitional period

The brine is circulated depending on the outdoor temperature measured via the thermostats. The intake air is always energetically optimised when it reaches the ventilation unit, which additionally saves energy – the indoor climate is always comfortable.


#### Planning information

- ☐ In order to maximise the heat transfer, the ground collector pipe should be laid at a depth of at least 1.2 m, since the temperature there is constantly approx. 8–12 °C throughout the year. The ground temperature increases and stabilises with installation depth.
- ☐ In order to increase the heat transfer, the pipe should be laid directly in the ground in a sand bed. Furthermore, if ground collector pipes are laid in parallel, the distance should not be less than 0.5 m (from pipe to pipe).
- ☐ There is also the option of probe drilling as an alternative to surface laying.

#### Delivery

- ☐ The ground-to-brine heat exchanger SEWT is delivered as a kit corresponding to the course of processing on-site and for optimised transportation. The complete set guarantees the absolute precision fit and functional reliability, because all individual components are matched to each other. The kit consists of three sets, which are described on the adjacent page.

## Schematic diagram

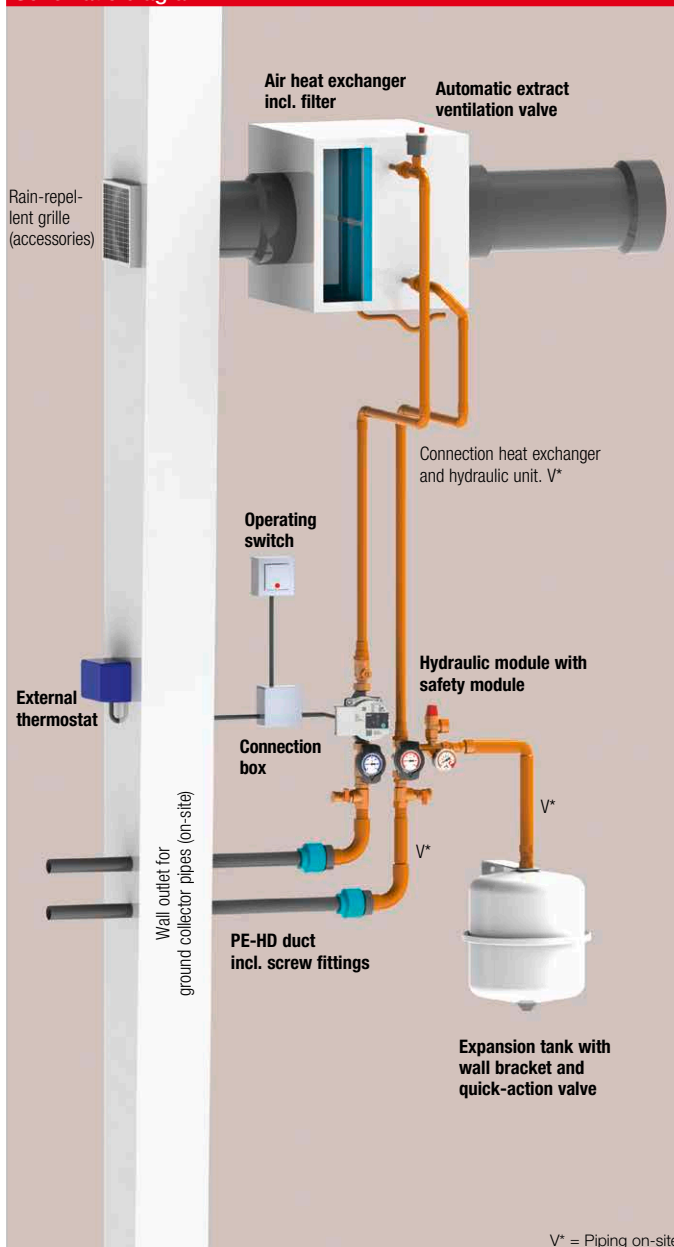

SEWT kit Ref. no. 02564


#### Pictorial schematic

The pre-insulated duct system IsoPipe should be used to prevent condensation. Alternative: Spiral duct with additional insulation.

## SEWT-W



### Dimensions SEWT-W



### Heat exchanger module

#### Description

- ☐ Highly efficient ground-to-brine heat exchanger unit with aluminium blades for optimal heat transfer to the intake air. Connection duct Ø 12 mm made of copper.
- ☐ Double-walled, fully insulated casing made of steel sheet (20 mm insulation, white powder-coated). With mounting bracket for wall or ceiling mounting.
- ☐ Connector Ø 180 mm with double lip seal.
- ☐ Variable air flow direction through convertible air filter.
- ☐ With integrated air filter, class ISO Coarse 75% (G4). Prevents the ingress of dirt, insects, etc.
- ☐ Inspection panels are easy to open without tools for quick and easy access to the filter.
- ☐ Condensate drain connector incl. siphon, Ø 1/2".

#### Accessories


Replacement air filter class ISO Coarse 75% (G4)

Unit = 3 pcs.

ELF-SEWT-F No. 02568

### Technical data SEWT-W


Pressure loss Heat exchanger module with filter ISO Coarse 75% (G4) in pure state



## SEWT-H



### Dimensions SEWT-H

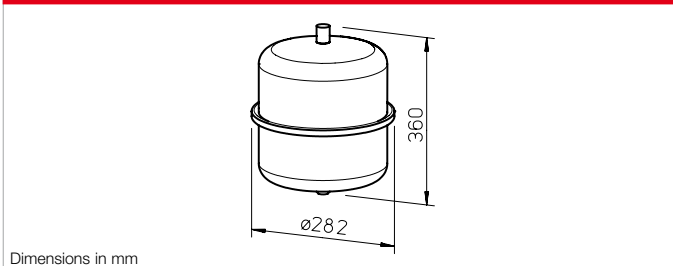

### Hydraulic module and control

#### Description

- ☐ Complete hydraulic kit with all components necessary for the connection of the ground-to-brine heat exchanger system and the corresponding control unit for automatic or manual system operation.

#### Delivery

- ☐ Brine pump unit (230 V) incl. safety module.
- ☐ Flow and return temperature display.
- ☐ Automatic quick-vent valve with non-return valve.
- ☐ Membrane pressure expansion tank – 12 litre, connection 3/4", incl. wall bracket and quick-action valve.

- ☐ Thermostat module with 2 setpoints for automatic control of the brine circuit in summer / winter operation.
- ☐ Switch unit for switching between automatic (thermostatic operation) and manual control of the brine circuit (incl. separate connection box – no Fig.)




#### Technical data Thermostat

Load capacity	16 A (4 A ind.)
Voltage	230V, 50/60Hz
Protection category	IP54
Wiring diagram no.	906
Temperature range (adjust.)	2 x 0 – 40 °C

#### Technical data Hydraulic module


Current consumption max.	0.44 A
Voltage	230 V, 50 Hz
Power consumption	3 – 45 W
Protection category	IP44

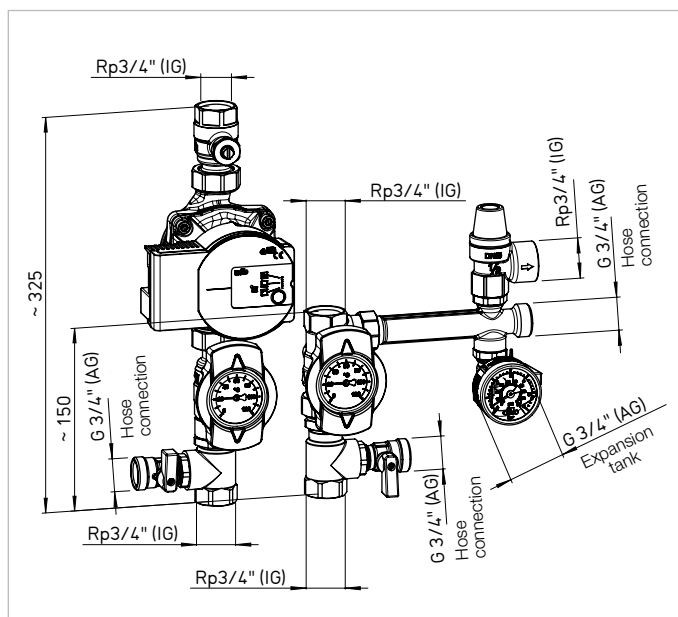

## SEWT-E



### Dimensions SEWT-E



### Ground installation set with screw fittings and 20 l ethylene glycol.

#### Description

- ☐ Flexible PE-HD ground collector pipe (PE-HD = polyethylene high-pressure pipe), wall thickness 2.9 mm, external Ø 32 mm. Delivered in 100 metre bundle.
- ☐ Specifically designed for ground installation.
- ☐ Screw fitting set made of high-quality polypropylene (PP) for connection of the ground collector pipe to the hydraulic unit.
- ☐ The screw fitting set (32-1") has an active seal system.
- ☐ 20 l canister of ethylene glycol, free from amines and nitrites. Sufficient for completely filling the duct system with a 25% glycol-water mixture.

#### Reference

The SEWT kit offers functional reliability and accuracy of fit in addition to the package price saving:

Type	Ref. no.
SEWT kit	02564
The individual components of the SEWT kit are to be ordered separately:	
Type	Ref. no.
SEWT-W	02565
SEWT-H	02566
SEWT-E	02567

## LEWT kit



The ground-to-air heat exchanger LEWT further optimises the efficiency of ventilation units with heat recovery.

### Advantages

- Additional preheating during the cold season without any additional energy requirements.
- Prevention of icing of the heat exchanger.
- Pleasant cooling on hot days.
- Additional post-heating of supply air is only necessary in case of very low outdoor temperatures.
- Complete kit with coordinated components.

### Functional principle

The ground-to-air heat exchanger LEWT utilises the fact that the ground temperature remains relatively constant throughout the year. The intake air is drawn through an upstream ground collector pipe. This can be instal-

led in an existing construction pit at a depth of approx. 1.2 to 1.5 m; the total pipe length should be at least 40 m.

### This results in the following:

- During the cold season  
The preheating of cold intake air of up to 14 K. Thus, the intake air is normally at a temperature above 0 °C when it reaches the ventilation unit with heat recovery (anti-icing operation). This results in an increased heat recovery rate and a higher supply air temperature. Post-heating is only necessary in case of very low outdoor temperatures.
- On hot summer days  
The ground-to-air heat exchanger reduces the intake air temperature.
- During the transitional period  
Intake either through the ground collector or direct intake opening. This is dependent on the outdoor

temperature measured via the thermostats. The electric bypass shutter automatically controls the ideal intake volume. The intake air is always energetically optimised when it reaches the ventilation unit, which additionally saves energy – the indoor climate is always comfortable.

### Delivery

- The ground-to-air heat exchanger LEWT is delivered as a kit corresponding to the course of processing on-site and for optimised transportation. It consists of three sets, which are described on the adjacent page.
- The individual components are perfectly matched to each other and form a system. This guarantees simple, quick and precise installation as well as high functional reliability.

### Planning information

- In order to maximise the heat transfer, the ground collector pipe should be laid at a depth of at least 1.2 m, since the temperature there is constantly approx. 8 °C throughout the year. The ground temperature increases and stabilises with installation depth.
- During installation, it should be ensured that there is a gradient of at least 2% for the condensate drain.
- In order to increase the heat transfer, the pipe should be laid directly in the ground in a sand bed. Furthermore, if ground collector pipes are laid in parallel, the distance should not be less than 1 m (from pipe to pipe).
- A minimum bend radius of 1 m is recommended to minimise the air-side pressure loss.

### Complete kit


consisting of ground collector pipe, outlet wall bushing, air intake column, control and pipe fittings.

LEWT kit

Ref. no. 02977

### Pictorial schematic for installation in buildings with basements


The ground collector pipe enters the building via an underground wall outlet.

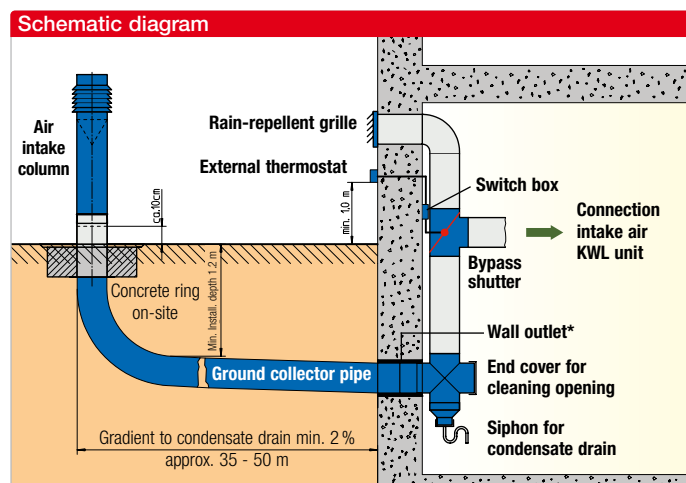

\*not suitable for pressing water.

### Pictorial schematic for installation in buildings without basements

The ground collector pipe is placed in the building via the floor panel. A shaft must be provided on-site for inspection purposes.

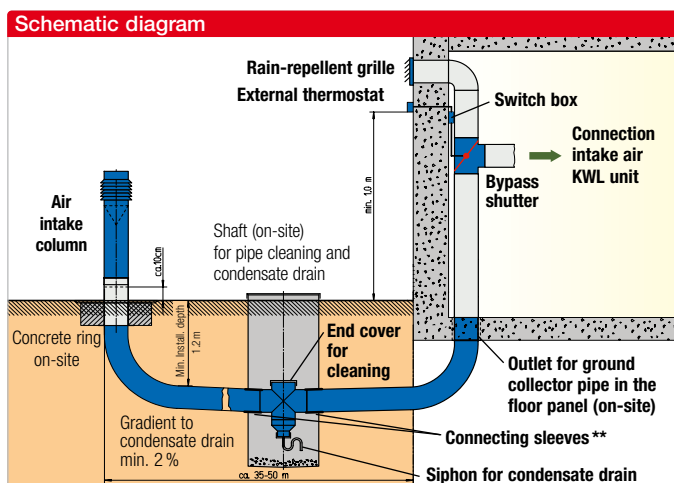


\*\*in case of assembly with shaft please order additionally 1 pc. connecting sleeve LEWT-MU No. 02971.

## LEWT-E+M



### Outlet wall bushing



### Ground collector pipe and wall outlet LEWT-E+M


#### Description

- ☐ Flexible, externally corrugated and internally smooth ground collector pipe with low air resistance; external Ø 200 mm.
- ☐ Coextruded composite pipe made of physiologically and toxicologically safe polyethylene (PE-HD). Antibacterial, antistatic inner wall. Specifically developed as a ventilation duct for ground installation.
- ☐ Easy to clean, fulfils DIN 1946-6 (VDI 6022).
- ☐ 100% odourless, assured top quality level excludes the transmission of harmful substances and vapours.
- ☐ The PE-HD material achieves double the conductivity of PP with comparable wall thicknesses / pipe cross-sections. In comparison to PVC, the heat conductivity is two and a half times better.
- ☐ Delivered in bundle with 2 x 25 liner metres. Includes wall outlet DN 200 made of polypropylene (sanded), profile seal rings, connecting sleeve and seals.
- ☐ Ground collector pipe, wall outlet and profile seal rings comply with protection category IP 67 when processed according to instructions.

## LEWT-A



### Air intake column




### Air intake column LEWT-A with filter

#### Description

- ☐ Air intake column in modern design and aesthetic stainless steel look for supply air intake.
- ☐ Simple plug-in connection between the intake column and ground collector pipe.
- ☐ Fixation with support plate or bordering plate (on-site) in drywall construction or set in concrete.
- ☐ All parts made of stainless steel.
- ☐ With integrated cone air filter, class ISO Coarse 60% (G4). Prevents the ingress of dirt, insects and contaminants.
- ☐ Cone filter must be removed by hand for cleaning and replacement after removing the blade head.


Pressure loss Air intake column with filter ISO Coarse 60% (G4) and 40 metre ground collector pipe in pure state




## LEWT-S+F



### Crosspiece



### Bypass shutter



### Control and moulded duct parts LEWT-S+F

#### Description

- ☐ Automatic control of air intake via the ground collector pipe or directly from the outdoor area depending on the outdoor temperature measured by the thermostat.
- ☐ Temperature range for direct intake individually adjustable at thermostat.
- ☐ The desired operating mode can be manually selected.
- Delivery**
- ☐ Bypass shutter NW 200 with actuator 230 V; for vertical installation using the crosspiece.
- ☐ Crosspiece for connection to the wall outlet. Includes cleaning opening, condensate collector, siphon and end cover.
- ☐ Rain-repellent grille (no Fig.) as wall cover for direct intake opening. Prevents the ingress of rain, small animals and insects into the intake air duct.

- ☐ Setpoint adjuster and thermostat for automatic and manual bypass shutter control.



For attachment in weatherproof location in the outdoor area on the north side of the building at a height of approx. 1 m.  
Dim. in mm B 200 x H 90 x T 70

- ☐ Switch box with double toggle switch for following operating modes:



– Thermostatic operation, automatic  
– Ground heat, manual  
– Intake air, manual  
Dim. in mm W 110 x H 180 x D 100

#### Accessories

#### Replacement air filter class ISO Coarse 60% (G4)

Unit = 3 pcs.

**ELF-LEWT-A** Ref. no. 02975

#### Additional connecting sleeve

Includes 2 pcs. seal rings.

**LEWT-MU** Ref. no. 02971

#### Technical data Thermostat

Load capacity	16 A (4 A ind.)
Voltage	230V, 50/60 Hz
Protection category	IP54
Wiring diagram no.	798.1
Temperature range (adjust.)	2 x 0 – 40 °C

#### Technical data Actuator

Voltage	230V, 50/60 Hz
Power consumption	1.5 W
Protection category	IP54

#### Reference

The individual components of the LEWT kit are to be ordered separately:

Type	Ref. no.
LEWT-E+M	02991
LEWT-S+F	02990
LEWT-A	02992
LEWT crosspiece	02967

# Helios AIR1

## Big solutions. From Helios.



► **PLAY**

Find out more about the many possibilities offered by Helios AIR1 on our YouTube channel.

**If you have big plans, you will find exactly the right solution for energy-efficient ventilation with heat recovery at Helios.**

The Helios AIR1 product range offers various technical variants in 4 series: For ceiling or floor standing installation, with highly efficient cross counterflow or rotary heat exchangers for use inside or outside. In this respect, more than 30 models in a flow rate range from 500 to 15 000 m<sup>3</sup>/h guarantee a suitable selection for virtually all areas of application and performance classes.

AIR1Select, the intuitive online software, provides the necessary overview for the simple and quick selection of your individual ventilation solution.

Further information can be found at:  
[www.HeliosAIR1.com](http://www.HeliosAIR1.com)











**Helios Ventilatoren GmbH + Co KG** · Lupfenstraße 8 · 78056 Villingen-Schwenningen · Germany  
Phone +49 77 20 / 606 - 0 · Fax +49 77 20 / 606 - 257 · [export@heliosventilatoren.de](mailto:export@heliosventilatoren.de) · [www.heliosventilatoren.de](http://www.heliosventilatoren.de)

Copyright ©: Helios Ventilatoren GmbH + Co KG, 78056 VS-Schwenningen, Germany. Certified according to ISO 9001/2015 and ISO 14001/2015.  
Subject to technical modifications. Illustrations and information are non-binding. Document no. 90 529.844 / 07.24