




Palm Impact Wrench

1/2" YU-RH4002T, YU-RH4005T & **3/8"** YU-RH3002T


**Extremely
Mini &
Lightweight

Usable
However
You Want**

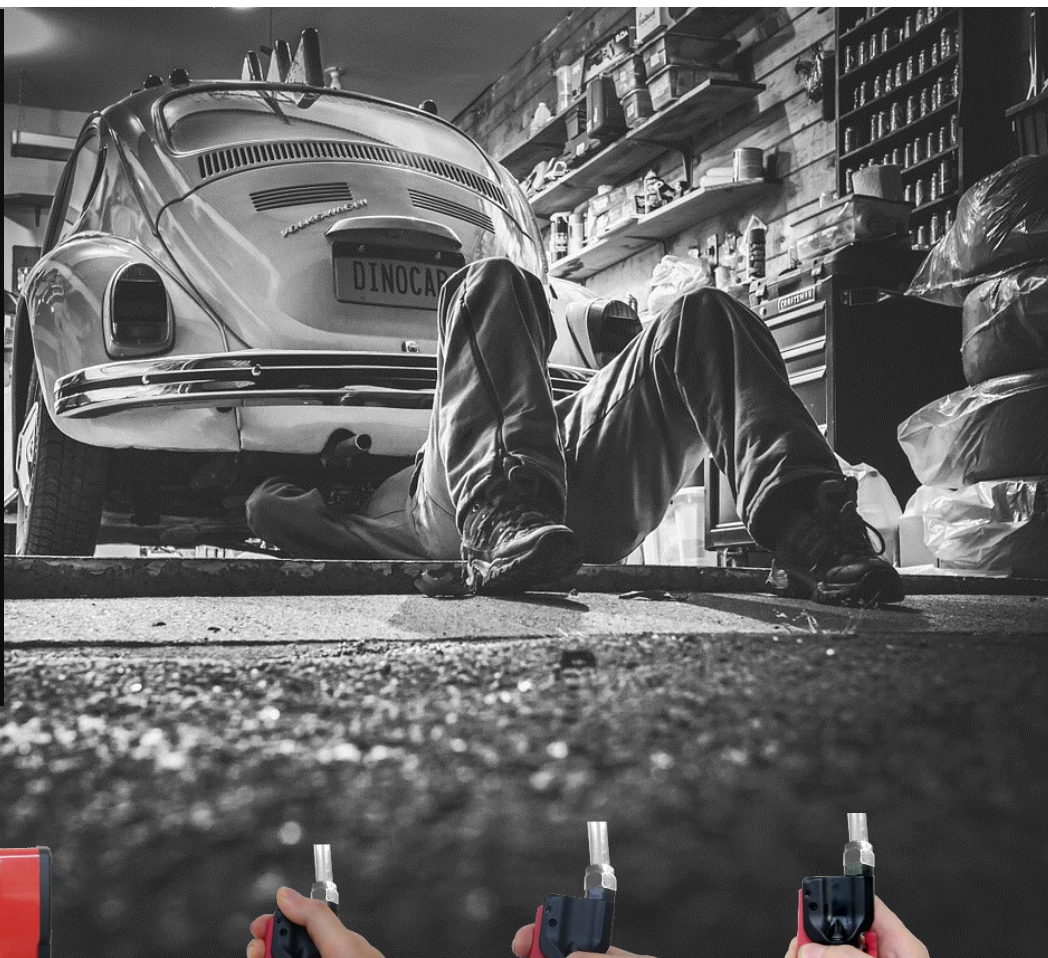

Twin Hammer Mechanism

Durable, less
vibration, excellent
balance and no
reaction force.
Ultra short length
85mm only.

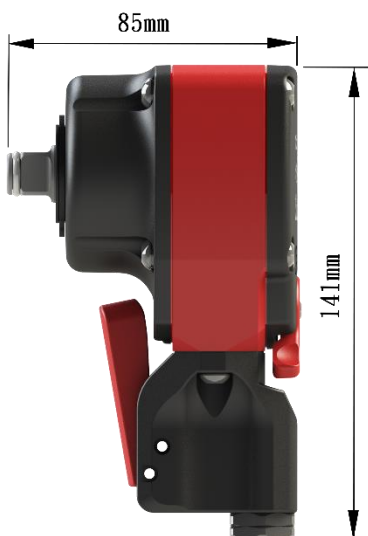



"Double-Air-Intake" Motor

By increased air flow can largely
deliver powerful output.



Patented Technology „Double-Air-Intake“

Reshape air motor construction to Double-Air-Intake and Double-Air-Exhaust, largely increase air intake and rapidly exhaust after work. Significantly improve rotor efficient to high peak.

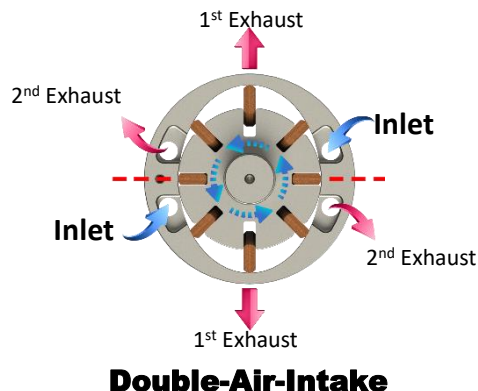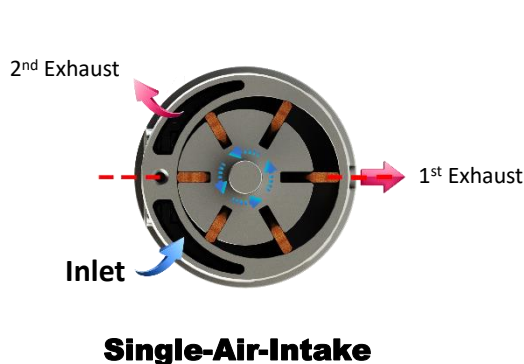

Variable Speed Trigger

Ensure the Anvil working steadily, prevent bolts from damage.

Aluminum Housing

Aluminum housing gives the Hammer & Motor a very rugged & robust protection.

Low Sound Level

Hidden muffler can greatly decrease working noise.

Application

Mainly aim for working in confined space and assembling production line. **Freely workable in any tight spaces!!**

Specification

Model No.	YU-RH3002T	YU-RH4002T	YU-RH4005T
Hammer	Twin Hammer		
Square Drive	3/8"	1/2"	1/2"
Bolt Capacity	1/2" (13 mm)		
Working Torque	332 FT-LB (450 N-m)		664 FT-LB (900 N-m)
Max. Torque	369 FT-LB (500 N-m)		737 FT-LB (1000 N-m)
Nut Breakaway	664 FT-LB (900 N-m)	740 FT-LB (1004 N-m)	-----
Free Speed	7,500 R.P.M.		
Air Consumption	3.4 CFM (25 scfm, 96 L/min.)		3.64 CFM (26 scfm)
Air Inlet	1/4"		
Air Pressure	90 PSI		
Air Hose	3/8" (10 mm)		
Tool size (mm)	88*64*141	85*64*141	131*72.6*176
Net Weight	1.1kg	1.1 kg	2.07
Sound (unload)	91 dB(A)	91 dB(A)	102.3 dB(A)

Patent No. & Country



Europe	EP 3351723
USA	US 10,677,060 B2EP
China	ZL 2017 1 0547151.2 ZL 2017 3 0029100.1
Taiwan	M541520, D185042 D186584, D223013



Yueh-Chi Enterprise Co., Ltd.

www.scorpiotool.com.tw

sales@scorpiotool.com.tw