

2024
Catalogue



**FLOOR JACK
JACK STAND
ENGINE CRANE
TRANSMISSION JACK
SPRING COMPRESSOR**

PORTA POWER & SHOP PRESS

GARAGE TOOLS

PINGHU TONGLI MACHINE CO.,LTD

WWW.TL3318.COM

INTRODUCTION



Pinghu Tongli Machine Co.,Ltd, was established in 1998 as The Pinghu Chengguan Tongli Machine Factory, integrating manufacturer and trader, which is located in "Golden Pinghu" Economic Development Zone, with convenient transportation access. With the support of some technological research institutes as well as several years' self-development, we specialize in the research, development and manufacturing of many high quality tools which include porta power jack, hydraulic pump series and piston cylinders, which are applicable to be used in automobile repair and field operations. We can also design and product various non-standard hydraulic cylinders units according to the demands of customers.

The factory has been certified by ISO9001-2008 Quality Control System and most of the products have won the CE (CONFORMITE EUROPEENNE) certificates. We also get Export Products Quality License and have 35 national patents. All of our products comply with international quality standards and our products have been well received in the international market. We pursue the management tenet of "Quality is superior, Service is supreme, Reputation is first", sincerely seek cooperation with all interested companies.

With our talented technicians, skilled workers and exquisite workmanship, Tongli will make every effort to cater to your needs by providing you with better products, better services, and better price.

- 1998 Pinghu Chengguan Tongli Machine Factory was established by a couple.
Two machines, two workers themselves and rent 300 square meters.
- 1999 Purchased the plant with 3,000 square meters.
- 2000 Designed and produced the first porta power jack.
- 2001 Attend the exhibition in SHANGHAI for the first time.
- 2002 Begin to profit, export the porta power jack. Designed and produced other hydraulic jacks.
- 2003 Purchased the land with 23,000 square meters. Established "TONGLI" brand.
- 2004 Built the new factory.
- 2005 Designed and produced more hydraulic jacks.
To do business with TORIN(BIG RED).
- 2006 Created a team of foreign trade.
Was named "Technology Innovation enterprises in Zhejiang Province".
- 2007 Attend the Canton Fair with government support.
- 2009 Created Pinghu Tongli Machine Co.,Ltd.
- 2010 Purchased the land with 8,000 square meters.
Purchased computer numerical control machine with 7 millions RMB.
- 2011 Built modern warehouse and modern building with 8,000 square meters.
Used a quality management system.
- 2012 To do business with Harbor Freight Tools.
- 2013 Purchased blow moulding machine to do the blow case of the porta power jack.
The old Pinghu Chengguan Tongli Machine Factory begin to producing tool cabinet.
- 2014 Purchased auto-welding machine. Built a new powder-coated line.
- 2015 Continue purchase auto-welding machine to instead of people.
The quality system will be control by machines not by workers.
Start building a new workshop around 10,000 square meters.
- 2016 Finish the new work shop and start producing double pump floor jack.

Please contact your sales partner as following

NAME CARD

WIN TOGETHER



CONTENTS

		PORTA POWER JACK	1-2			OIL DRAIN TANK	38
		SHOP PRESS	3-18			SPRING COMPRESSOR	39-40
		FLOOR JACK	19-22			FRAME STRAIGHTENER	41
		FRAM JACK	22			MOTORCYCLE LIFT	42
		TRANSMISSION JACK	23-26			JACK STAND	43
		ENGINE CRANE	27-28			AIR JACK	44
		ENGINE LEVELER	28			CAR DOLLY	45
		ENGINE STAND	29			VEHICLE POSITIONING JACK	45
		ENGINE SUPPORT	29			TOOL TROLLEY	46
		TELESCOPING GANTRY CRANE	30			CREEPER	47-48
		HYDRAULIC PIPE BENDER	31-32			STEEL CAR SEAT	48
		HAND PALLET TRUCK	33			BOTTLE JACK	49-51
		FORK TRUCK	33			HYDRAULIC TOOL KIT	52-53
		AIR HYDRAULIC JACK	34			PULL BACK RAM	54
		HYDRAULIC CYLINDER	35-36			PUMP AND CYLINDER	54-56
		FLAT CYLINDER	37			LOG SPLITTER	57-59



PORTA POWER JACK



- Iron release valve
- Portable - No need for a power source
- Snap-lock extension tubes for quick, easy assembly
- Interlocking extension tubes
- Pump handle with cushion grip for easy pump action
- Flex head features permanently molded rubber pad, interlocked to prevent separation
- Automatic pump overload system helps prevent damage to rams and equipment



TL0004

Stroke:125mm
Min.Height:270mm
Packing Size:
600×350×185mm
N.W.:17kg
G.W.:18kg
20-ft Container:660PCS

4
TON

Blow
Case



TL0004-1

Stroke:125mm
Min.Height:270mm
Packing Size:
570×270×180mm
N.W.:17kg
G.W.:18kg
20-ft Container:1000PCS

4
TON

Iron
Box



TL0010

Stroke:135mm
Min.Height:358mm
Packing Size:
750×420×170mm
N.W.:31kg
G.W.:32kg
20-ft Container:470PCS

10
TON

Blow
Case



TL0010-1

Stroke:135mm
Min.Height:358mm
Packing Size:
760×320×175mm
N.W.:31kg G.W.:32kg
20-ft Container:600PCS

10
TON

Iron
Box




TL0010K

Stroke:135mm
Min.Height:358mm
Packing Size:750×420×170mm
N.W.:31kg G.W.:32kg
20-ft Container:470PCS

Speedy Pump

10
TON

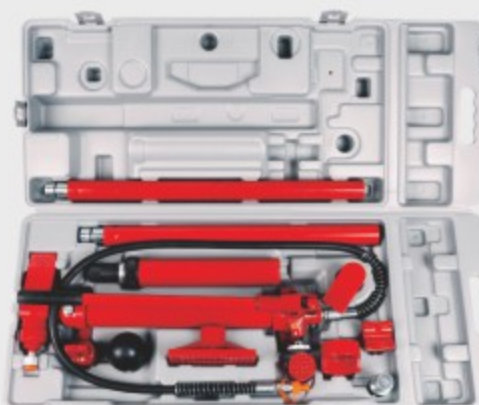

TL0010-2

Stroke:135mm
Min.Height:358mm
Packing Size:
950×400×190mm
N.W.:32kg G.W.:33kg
20-ft Container:380PCS



10
TON



TL0020A

Stroke:145mm
Min.Height:385mm
Packing Size:760×330×260mm
N.W.:43kg G.W.:46.5kg
20-ft Container:500PCS

20
TON

Iron
Box



TL0020B

Stroke:125mm
Min.Height:278mm
Packing Size:
760×350×200mm/800×430×130mm
N.W.:27kg/30kg G.W.:28kg/31kg
20-ft Container:280PCS



20
TON

Iron
Box



TL710015

Stroke:135mm
Packing Size:
750×480×265mm
N.W.:36kg G.W.:41.5kg
20-ft Container:388PCS

10
TON



HEAVY DUTY SHOP PRESS

CE

**NEW
PRODUCT**



- Cylinder moveable
- Grid guard is optional
- Warning line on cylinder
- Hand winch for press bed
- Arbor plates has more functions
- The pins for press bed with butterfly washers
- Heavy duty welded constructed by robot machine




**TL0500BA-12
AIR PUMP**



**TL0500BH-12
HAND PUMP**



**TL0500BF-12
FOOT PUMP**

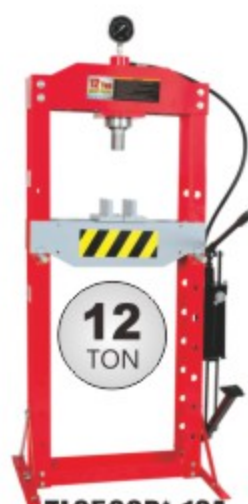

**TL0500B*-12A
ASSEMBLY TYPE**

Packing Size:
1570×250×240mm
20-ft Container:250PCS




**TL0500BA-20
AIR PUMP**



**TL0500BH-20
HAND PUMP**



**TL0500BF-20
FOOT PUMP**

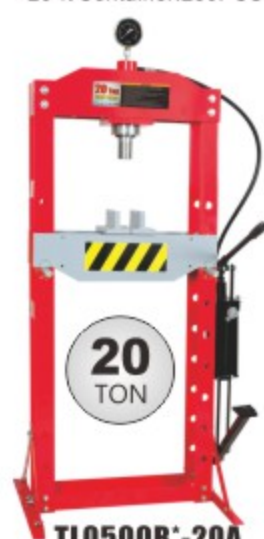

**TL0500B*-20A
ASSEMBLY TYPE**

Packing Size:
1610×270×255mm
20-ft Container:200PCS




**TL0500BA-30
AIR PUMP**



**TL0500BH-30
HAND PUMP**



**TL0500BF-30
FOOT PUMP**

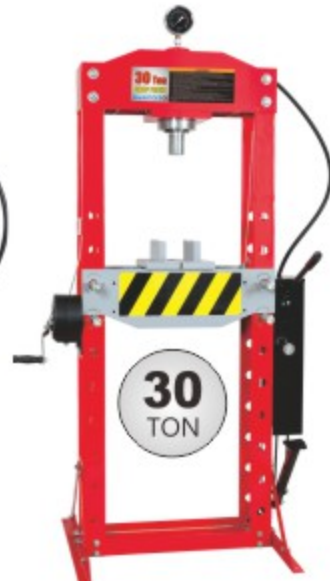

**TL0500B*-30A
ASSEMBLY TYPE**

Packing Size:
1810×335×300mm
20-ft Container:125PCS





**TL0500BA-50
AIR PUMP**



**TL0500BH-50
HAND PUMP**



**TL0500BF-50
FOOT PUMP**

Model	Capacity (Ton)	PRODUCT SIZE(mm)									N.W. (kg)	G.W. (kg)	Packing Size (mm)	QTY/20GP (PCS)
		A	B	C	D	E	F	G	H (Stroke)	M				
TL0500B*-12	12	700	500	1562	1604	600	130	169-1009	135	170	83	110	1590x650x240	99
TL0500B*-20	20	760	540	1612	1663	600	140	58-1018	145	180	102	129	1670x730x255	71
TL0500B*-30	30	780	540	1808	1838	750	180	166-1126	150	200	170	206	1920x750x290	56
TL0500B*-50	50	1030	730	1838	1918	750	202	88-1068	220	245	264	307	965x330x2040	40

* means A, H or F

OPTION

PRESS PIN ADAPTER KIT TL0500PP

N.W.:7.5kg


G.W.:8kg

Packing Size:380x185x120mm



Capacity (TON)	Diameter (mm)
2	10
3	12
8	16
12	18
14	20
16	22
18	25
20	30


For all 20Ton and 30Ton shop press



Grid Guard

Model	Applied Model	Length (mm)	Width (mm)	N.W. (kg)	G.W. (kg)	Package Size (mm)
GG-01	TL0500B*-12	605	445	1.9 0.6	2.3 0.7	630x460x30 150x110x60
GG-02	TL0500B*-20 TL0500B*-30	605	505	2.1 0.6	2.5 0.7	630x520x30 150x110x60
GG-03	TL0500B*-50 TL0500B*-75 TL0500B*-100	605	685	2.6 0.6	3 0.7	630x700x30 150x110x60

* means A, H, F or E

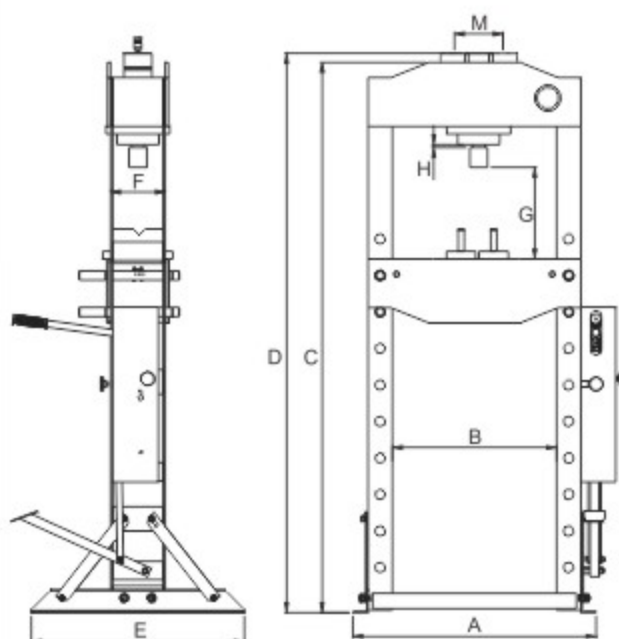

**For TL0500BA TL0500BH
TL0500BF TL0500BE**



**TL0500BA-75
AIR PUMP**

OPTION



**TL0500BE-75
ELECTRIC PUMP**



**TL0500BH-75
HAND PUMP**



**TL0500BA-100
AIR PUMP**

OPTION



**TL0500BE-100
ELECTRIC PUMP**




**TL0500BH-100
HAND PUMP**

Model	Capacity (Ton)	PRODUCT SIZE(mm)									N.W. (kg)	G.W. (kg)	Packing Size (mm)	QTY/20GP (PCS)
		A	B	C	D	E	F	G	H (Stroke)	M				
TL0500B*-75	75	1140	800	1870	2010	750	240	170-1000	250	260	410	460	1100x430x2160	26
TL0500B*-100	100	1030	785	1838	1918	750	202	90-840	300	230	570	630	1110x480x2180	24

* means A, H or E

SHOP PRESS

CE

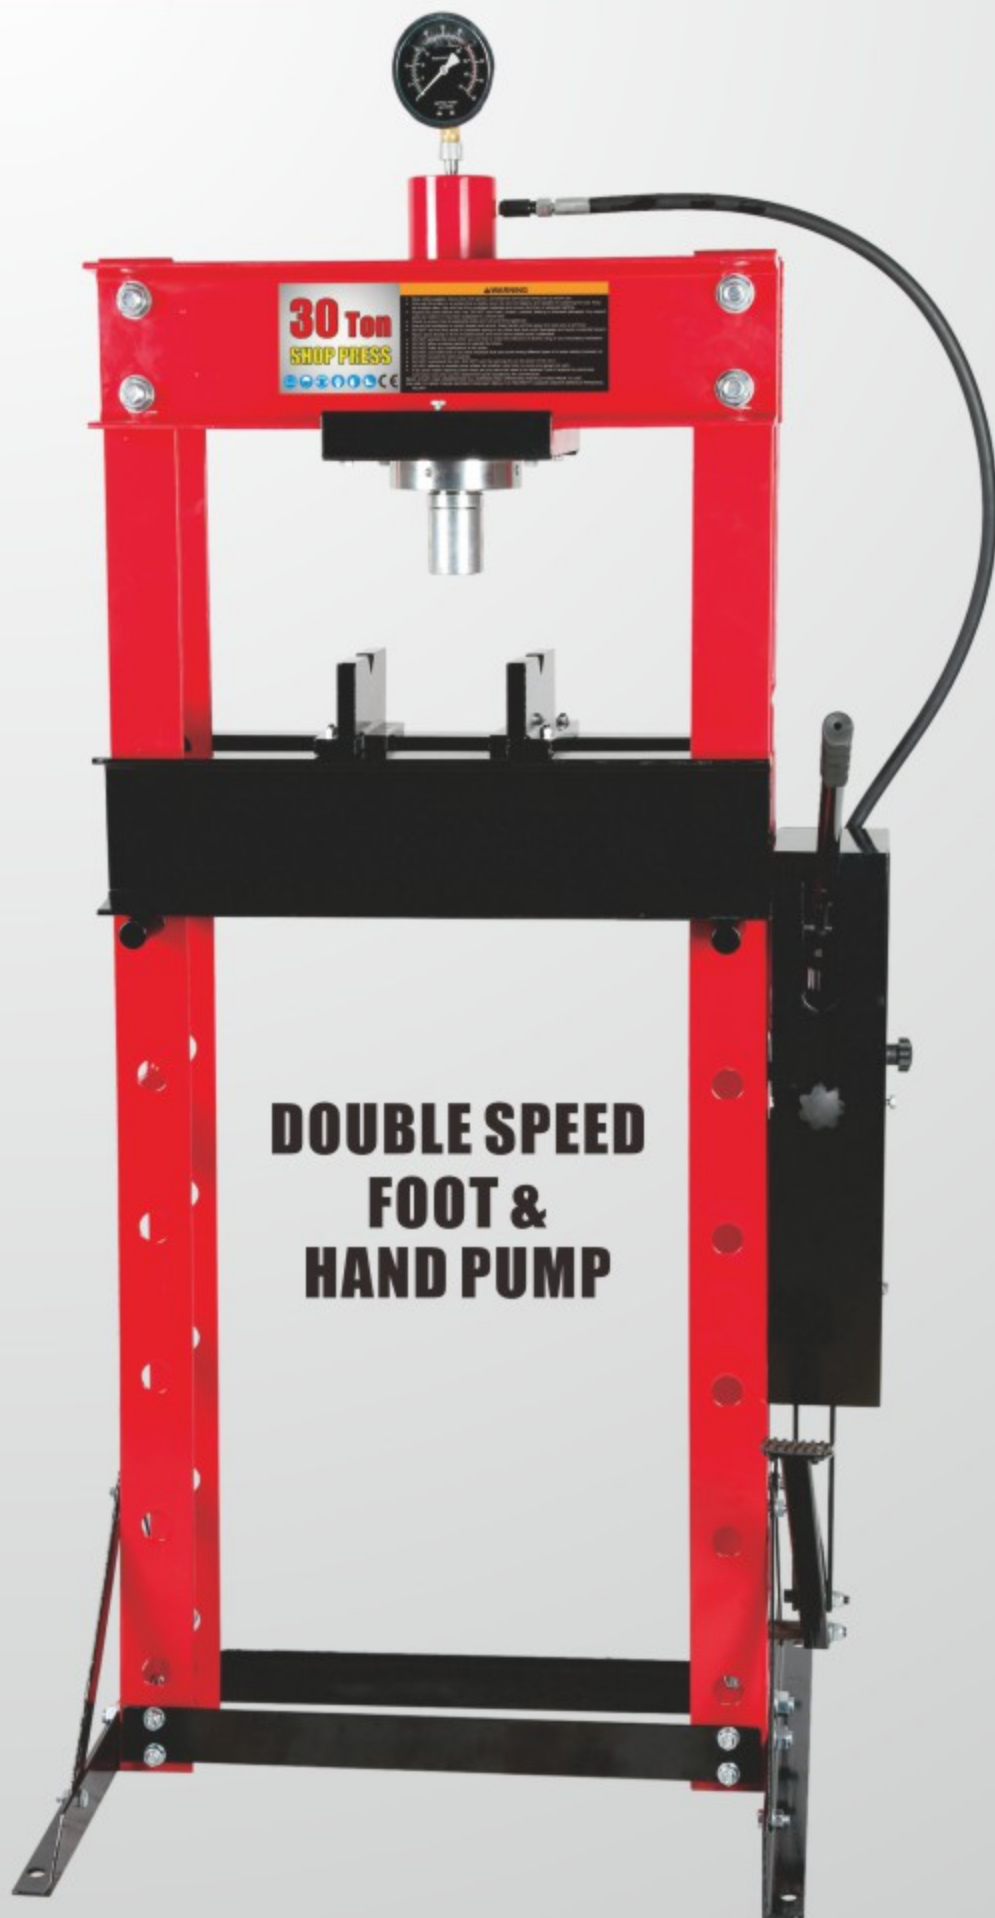

FOOT SUPPORT



**PLASTIC COVER
FOR HAND WINCH**



**CYLINDER MOVEABLE
(4TON TO 30TON)**



**WELDED BY
ROBOT MACHINE**



WARNING LINE



TL0500F-2

TL0500F-3

TL0500F-4

TL0500F-5

Model	Capacity (Ton)	PRODUCT SIZE(mm)								Pressure (MPa)	N.W. (kg)	G.W. (kg)	Package Size (mm)	QTY/20GP (PCS)
		A	B	C	D	E	F	G (MAX)	H (Stroke)					
TL0500F-2	10	735	475	1600	560	560	80	900	135	62	62	64	1320×250×250	250
TL0500F-3	20	780	500	1860	600	600	90	1110	145	69	90	96.5	1630×275×245	210
TL0500F-4	30	900	530	1810	690	700	160	980	160	67	148	159	1640×370×280	120
TL0500F-5	40	1145	685	1830	850	800	180	860	230	62	210	240	1880×940×400	34
TL0500F-6	50	1145	650	1830	850	800	180	860	230	77	224	253	1890×940×400	34

The drawing for product size is on Page 10



TL0500F-6




PRESS PIN ADAPTER KIT TL0500PP

N.W.:7.5kg

G.W.:8kg


Packing Size:380×185×120mm



Capacity (TON)	Diameter (mm)
2	10
3	12
8	16
12	18
14	20
16	22
18	25
20	30

For TL0500-3/TL0500-4/TL0500F-3/
TL0500F-4/TL0501-2/TL0501-3

SHOP PRESS

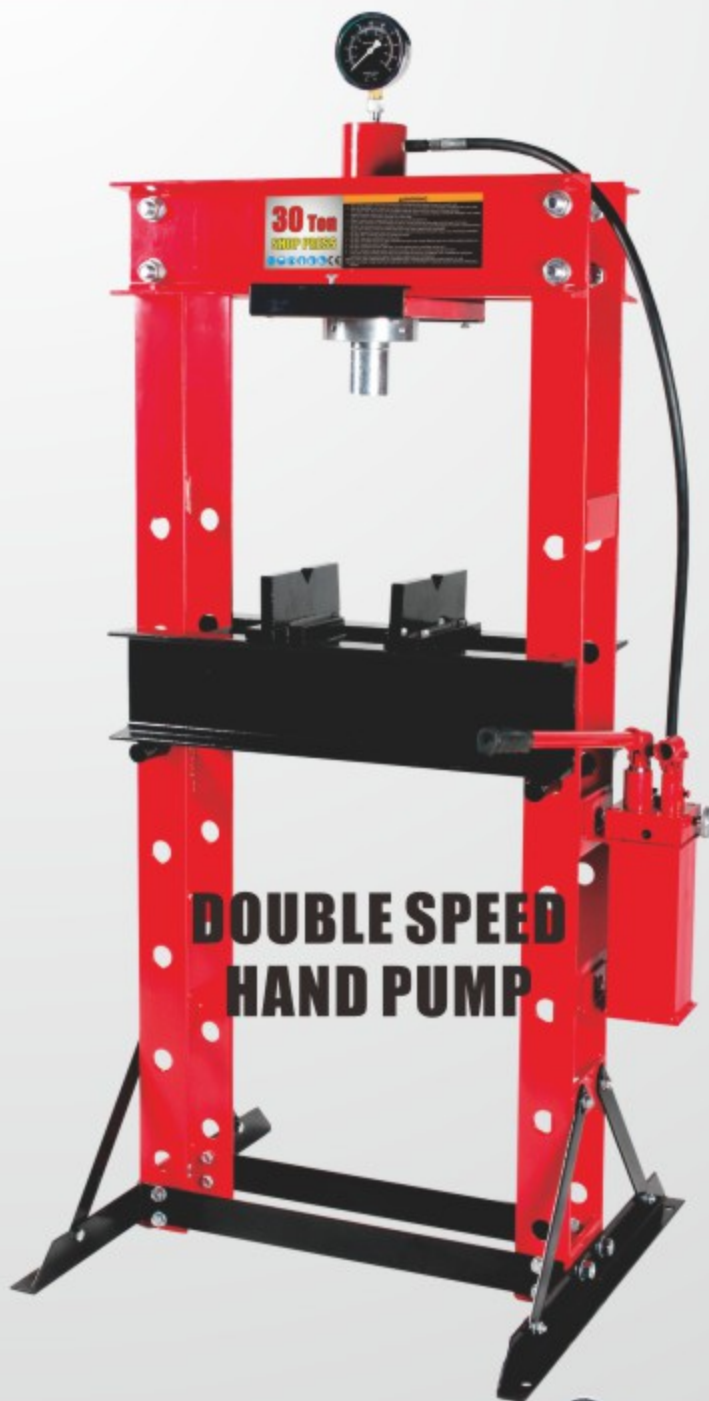

FOOT SUPPORT



**PLASTIC COVER
FOR HAND WINCH**



**CYLINDER MOVEABLE
(4TON TO 30TON)**



**WELDED BY
ROBOT MACHINE**



WARNING LINE



TL0500-0





TL0500-1



TL0500-1A




Model	Capacity (Ton)	PRODUCT SIZE(mm)								Pressure (MPa)	N.W. (kg)	G.W. (kg)	Package Size (mm)	QTY/20GP (PCS)
		A	B	C	D	E	F	G (MAX)	H (Stroke)					
TL0500-0	4	530	350	735	450	405	70	340	120	62	34.5	37.5	580×250×165	450
TL0500-1	10	570	400	1020	490	490	80	330	135	62	44.5	46.5	750×250×250	380
TL0500-1A	10	570	340	1030	490	490	112	290	135	62	44.5	46.5	750×530×160	390
TL0500-2	10	735	475	1600	560	560	80	900	135	62	62	64	1320×250×250	250
TL0500-3	20	780	500	1860	600	600	90	1110	145	69	90	96.5	1630×275×245	210
TL0500-4	30	900	530	1810	690	700	160	980	160	67	148	159	1640×370×280	120
TL0500-5	40	1145	685	1830	850	800	180	860	230	62	210	240	1880×940×400	34
TL0500-6	50	1145	650	1830	850	800	180	860	230	77	224	253	1890×940×400	34

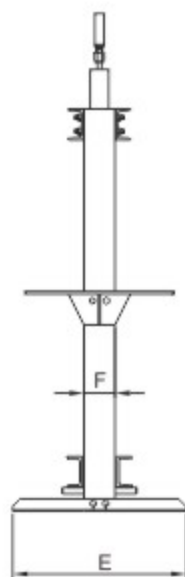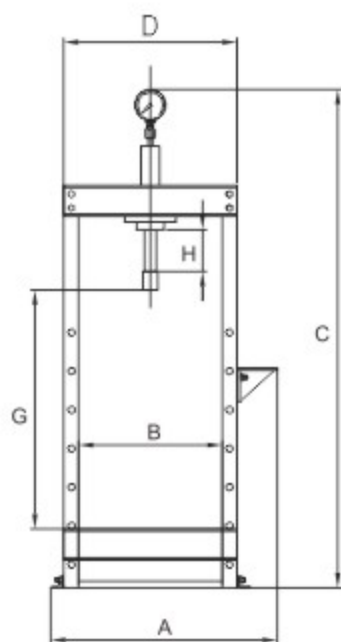

For TL0500F, TL0500 and TL0501

SHOP PRESS

CE

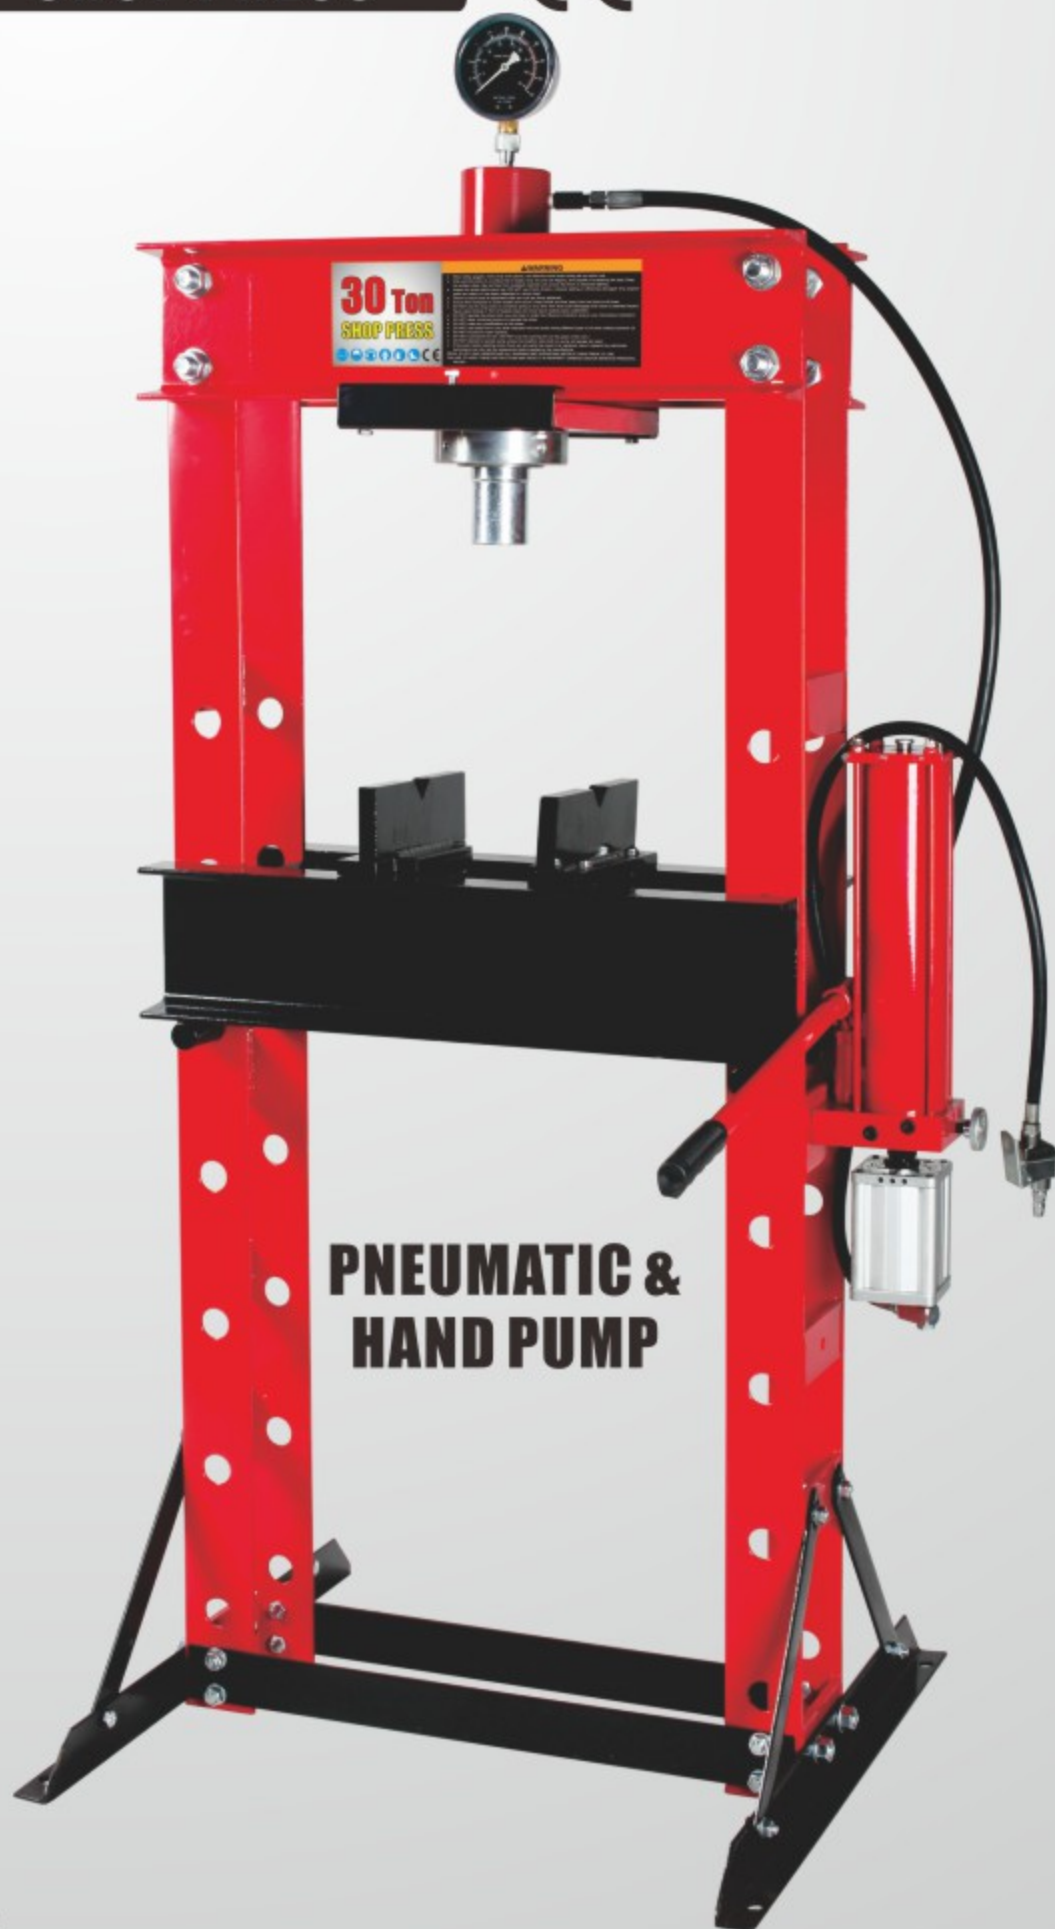

FOOT SUPPORT



**PLASTIC COVER
FOR HAND WINCH**



**CYLINDER MOVEABLE
(4TON TO 30TON)**




**WELDED BY
ROBOT MACHINE**



WARNING LINE



TL0501-1

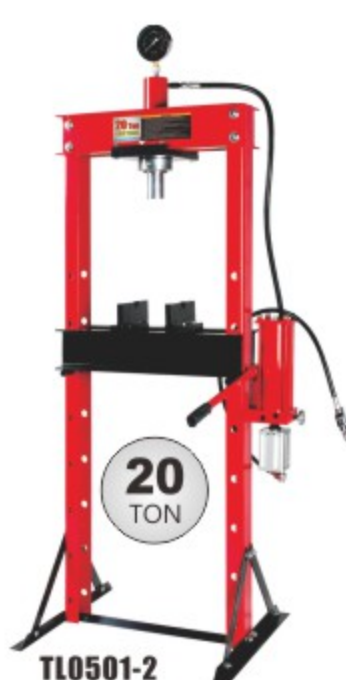


TL0501-2



TL0501-3



TL0501-4

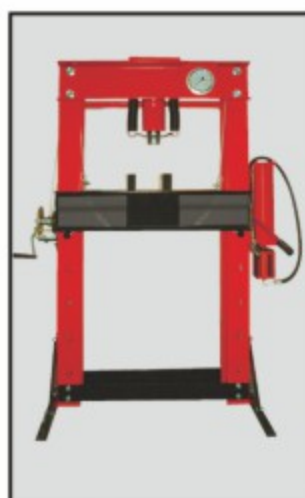

TL0501-4B



TL0501-4A

Model	Capacity (Ton)	PRODUCT SIZE(mm)								Air Pressure (MPa)	Pressure (MPa)	N.W. (kg)	G.W. (kg)	Package Size (mm)	QTY/20GP (PCS)
		A	B	C	D	E	F	G (MAX)	H (Stroke)						
TL0501-1	10	735	475	1600	560	560	80	900	135	0.85	62	70	72	1320×250×250	250
TL0501-2	20	780	500	1860	600	600	90	1110	145	0.85	69	90	98	1630×275×245	210
TL0501-3	30	900	530	1810	690	700	160	980	160	0.85	67	150	160	1785×370×280	120
TL0501-4	40	1145	685	1830	850	800	180	860	230	0.85	62	210	250	1890×940×400	34
TL0501-4A	50	1145	650	1830	850	800	180	860	230	0.85	62	215	255	1890×940×400	34
TL0501-4B	50	1145	650	1830	850	800	180	860	230	0.85	77	215	255	1890×940×400	34

The drawing for product size is on Page 10

TL0501/TL0500A The Parameter Of Air Pump

Ref. Capacity	Air Pressure (MPa)	Without Load		With Load		Working Pressure (MPa)	With Hand (L/10Time)	Oil Tank (L)
		Frequency Time/Min	Flux L/Min	Frequency Time/Min	Flux L/Min			
10T	0.85	950	0.7	520	0.38	62	0.025	0.7
20T	0.85	950	0.7	520	0.38	68	0.025	1
30T	0.85	850	0.89	350	0.36	68	0.025	1.5
40T	0.85	850	0.89	350	0.36	61	0.025	2.5
50T	0.85	850	0.89	350	0.36	77	0.025	2.5
60T	0.85	360	0.59	160	0.26	61	0.025	4

ELECTRICAL SHOP PRESS






TL0502-1

TL0502-2

TL0502-3

Model	Capacity (Ton)	PRODUCT SIZE(mm)								Pressure (MPa)	N.W. (kg)	G.W. (kg)	Package Size (mm)	QTY/20GP (PCS)
		A	B	C	D (MAX)	E	F	G	H					
TL0502-1	50	900	1838	700	870	220	250	850	350	36.9	350	400	1020×540×1900	24
TL0502-2	75	1000	1955	760	600	280	292	850	350	36.6	480	530	1120×540×2050	20
TL0502-3	100	1100	2013	820	690	300	355	950	350	38.5	740	790	1230×630×2100	20
TL0502-4	150	1470	2310	1150	850	350	378	1050	350	38.7	1070	1120	1600×720×2350	15

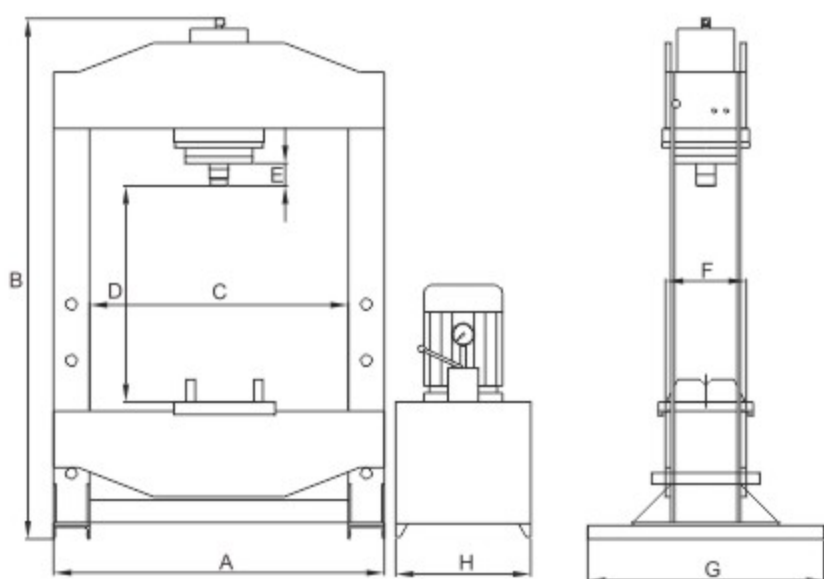

TL0502-4

SUPER HEAVY DUTY SHOP PRESS



**PNEUMATIC &
HAND PUMP**

**DOUBLE SPEED
FOOT &
HAND PUMP**





TL0500A-2

Max.Working Distance:1020mm
Stroke:145mm
Packing Size:760×290×1800mm
N.W.:135kg G.W.:155kg
20-ft container:55PCS



TL0500A-4

Max.Working Distance:1050mm
Stroke:200mm
Packing Size:880×420×1910mm
N.W.:220kg G.W.:250kg
20-ft container:32PCS



TL0500A-5

Max.Working Distance:1050mm
Stroke:220mm
Packing Size:930×460×2000mm
N.W.:265kg G.W.:295kg
20-ft container:29PCS



TL0500A-6

Max.Working Distance:1060mm
Stroke:220mm
Packing Size:970×500×2080mm
N.W.:315kg G.W.:350kg
20-ft container:26PCS



TL0500AF-2

Max.Working Distance:1020mm
Stroke:145mm
Packing Size:760×290×1800mm
N.W.:135kg G.W.:155kg
20-ft container:55PCS



TL0500AF-4

Max.Working Distance:1050mm
Stroke:200mm
Packing Size:880×420×1910mm
N.W.:220kg G.W.:250kg
20-ft container:32PCS




TL0500AF-5

Max.Working Distance:1050mm
Stroke:220mm
Packing Size:930×460×2000mm
N.W.:265kg G.W.:295kg
20-ft container:29PCS



TL0500AF-6

Max.Working Distance:1060mm
Stroke:220mm
Packing Size:970×500×2080mm
N.W.:315kg G.W.:350kg
20-ft container:26PCS

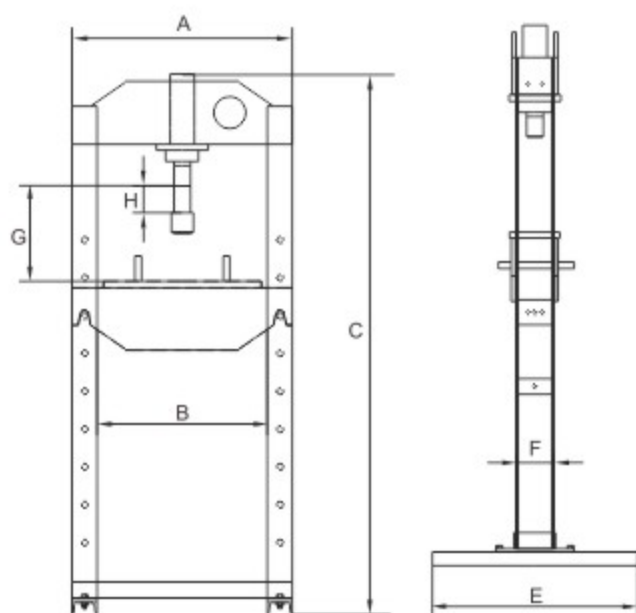

TL0500A TL0500AF

Capacity	Ref.	A (mm)	B (mm)	C (mm)	E (mm)
20T		835	540	1713	650
40T		935	600	1820	800
50T		820	620	1890	750
60T		1035	600	1993	850

Capacity	Ref.	F (mm)	G MAX (mm)	H (mm)	Pressure (MPa)
20T		120	1027	145	69.4
40T		180	1040	200	61.7
50T		202	1050	220	62
60T		230	1060	220	61.9

SHOP PRESS WITH BOTTLE JACK



**NEW
PRODUCT**



HEAVY DUTY



FOOT SUPPORT



WITH SPRING



TL0600-1▶

Stroke:150mm
Max.Working Distance:730mm
Packing Size:1350×225×150mm
N.W.:52kg G.W.:54kg
20-ft Container:420PCS



TL0600-2▶

Stroke:160mm
Max.Working Distance:890mm
N.W.:65kg/10.2kg
G.W.:67kg/11kg
Packing Size:
1610×240×150mm
170×180×250mm
20-ft Container:220PCS



TL0600-3▶

Stroke:150mm
Max.Working Distance:800mm
N.W.:122kg
G.W.:132kg
Packing Size:
1690×355×265mm
20-ft Container:150PCS



FLOOR JACK



**NEW
PRODUCT**



DOUBLE PUMP



- Extra-wide steel casters for stability
- Two piece knurled steel handle for a sure grip
- Super-tough precision welded construction
- Exclusive dual pump system lifts with far fewer pumps
- Equipped with foam bumper to prevent damage to vehicle finish
- Universal joint release provides precise load control in any handle position



TL1900-25

TL1900-35

Model	Capacity (Ton)			Min Height (mm)	Max Height (mm)	N.W. (kg)	G.W. (kg)	Package Size (mm)	QTY/20GP (PCS)
	Metric Ton (CE)	American Ton (AMSE_PALD-2005)	American Ton (AMSE_PALD-2009)						
TL1900-25	2.5	3	2.5	130	460	31.5	33.5	730x380x180	610
TL1900-35	3.5	4	4	102	520	45.5	47.5	820x400x190	360



TL1901-20

TL1901-15

Model	Capacity (Ton)			Min Height (mm)	Max Height (mm)	N.W. (kg)	G.W. (kg)	Package Size (mm)	QTY/20GP (PCS)
	Metric Ton (CE)	American Ton (AMSE_PALD-2005)	American Ton (AMSE_PALD-2009)						
TL1901-15	1.5	2	1.7	70	610	45	47	990x430x200	330
TL1901-20	2	2.5	2	75	505	32	34	780x380x180	570

FLOOR JACK



2.5
TON

TL1901-1

Min.Height:85mm
Max.Height:485mm
Packing Size:690×385×200
N.W.:34kg
G.W.:36kg
20-ft Container:500PCS



3
TON

TL1901-2

Min.Height:85mm
Max.Height:485mm
Packing Size:690×385×200
N.W.:34kg
G.W.:36kg
20-ft Container:500PCS



3
TON

TL1900-1

Min.Height:135mm
Max.Height:495mm
Packing Size:690×385×200mm
N.W.:32kg
G.W.:34kg
20-ft Container:500PCS


LONG FLOOR JACK



2
TON

TL2000-0

Min.Height:140mm
Max.Height:800mm
Packing Size:1260×440×210mm
N.W.:61kg
G.W.:66kg
20-ft Container:230PCS

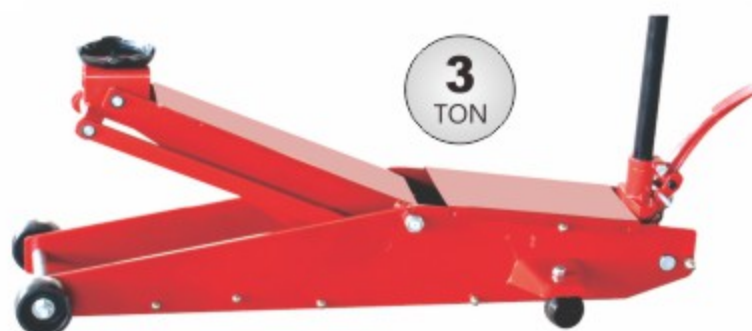

3
TON

TL2000-1

Min.Height:145mm
Max.Height:630mm
Packing Size:1180×470×210mm
N.W.:62kg
G.W.:68kg
20-ft Container:230PCS



5
TON

TL2000-2

Min.Height:160mm
Max.Height:560mm
Packing Size:1570×420×290mm
N.W.:90kg
G.W.:112kg
20-ft Container:160PCS





TL2000-3

Min.Height:170mm
Max.Height:570mm
Packing Size:
1670×520×330mm
N.W.:135kg
G.W.:150kg
20-ft Container:112PCS

TL2001-1

Min.Height:135mm
Max.Height:300mm
Packing Size:470×240×150mm
N.W.:8.5kg
G.W.:9.5kg
20-ft Container:2500PCS



2
TON



FARM JACK

TL2002-1

20"

Min.Height:130mm
Max.Height:466mm
Packing Size:640×250×160mm
N.W.:8kg G.W.:9kg
20-ft Container:1320PCS



TL2002-2


33"

Min.Height:130mm
Max.Height:802mm
Packing Size:930×250×160mm
N.W.:12kg G.W.:13kg
20-ft Container:950PCS

TL2002-3

48"


Min.Height:130mm
Max.Height:1200mm
Packing Size:
1260×250×160mm
N.W.:13kg
G.W.:14kg
20-ft Container:670PCS

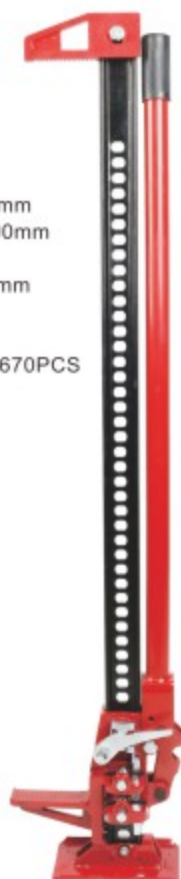

TL2002-4

60"

Min.Height:130mm
Max.Height:1474mm
Packing Size:
1580×250×160mm
N.W.:14.5kg
G.W.:15.5kg
20-ft Container:550PCS

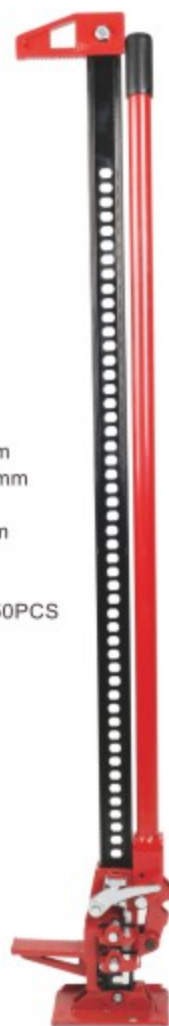

TRANSMISSION JACK



NEW DESIGN



- Magic saddle by turning the saddle upside down, it can also be used as extra support
- Integrated overload protection valve keeps from overloading the system



TL0901

Min.Height:1130mm
Max.Height:1940mm
Packing Size:1120×240×290mm
N.W.:30kg G.W.:35kg
20-ft Container:396PCS



TL0902

Min.Height:1240mm
Max.Height:2050mm
Packing Size:1120×240×290mm
N.W.:40kg G.W.:44kg
20-ft Container:375PCS



TL0903

Min.Height:1300mm
Max.Height:1800mm
Packing Size:870×250×290mm
N.W.:27.5kg G.W.:32kg
20-ft Container:400PCS



TL0904

Min.Height:1225mm
Max.Height:2050mm
Packing Size:1100×210×230mm
N.W.:26.5kg G.W.:32kg
20-ft Container:540PCS



TL0905

Min.Height:1230mm
Max.Height:2055mm
Packing Size:1100×210×230mm
N.W.:29kg G.W.:34kg
20-ft Container:540PCS

LOW POSITION TRANSMISSION JACK



**0.5
TON**

TL0701

Min.Height:170mm
Max.Height:680mm
Packing Size:
860×450×220mm
N.W.:37kg
G.W.:43kg
20-ft Container:320PCS



**1
TON**

TL0702

Min.Height:230mm
Max.Height:760mm
Packing Size:
930×530×290mm
N.W.:56kg
G.W.:68kg
20-ft Container:250PCS



**1
TON**

TL0702-1

Min.Height:175mm
Max.Height:805mm
Packing Size:1020×570×220mm
N.W.:61kg
G.W.:66kg
20-ft Container:200PCS



**1.5
TON**

TL0703

Min.Height:230mm
Max.Height:880mm
Packing Size:990×560×320mm
N.W.:78kg G.W.:87kg
20-ft Container:210PCS



**2
TON**

TL0704

Min.Height:210mm
Max.Height:900mm
Packing Size:1160×695×320mm
N.W.:130kg G.W.:140kg
20-ft Container:100PCS



TRANSMISSION JACK



0.5
TON

TL0801

Min.Height:855mm
Max.Height:1760mm
Packing Size:
490×320×810mm
N.W.:55kg
G.W.:61kg
20-ft Container:230PCS



0.5
TON

TL0802

Min.Height:830mm
Max.Height:1800mm
Packing Size:
560×370×890mm
N.W.:74kg
G.W.:88kg
20-ft Container:150PCS



0.5
TON

TL0803

Min.Height:830mm
Max.Height:1800mm
Packing Size:
560×370×890mm
N.W.:74kg
G.W.:88kg
20-ft Container:150PCS



0.6
TON

TL0804

Min.Height:855mm
Max.Height:1760mm
Packing Size:520×320×800mm
N.W.:56.5kg
G.W.:61.5kg
20-ft Container:230PCS



0.5
TON

TL0805

Min.Height:855mm
Max.Height:1760mm
Packing Size:
600×365×870mm
N.W.:60kg
G.W.:68kg
20-ft Container:150PCS



1
TON

TL0806

Min.Height:830mm
Max.Height:1800mm
Packing Size:560×370×910mm
N.W.:77kg
G.W.:90kg
20-ft Container:150PCS

ENGINE CRANE



0.5
TON

TL1000-1

Lifting Height:2000mm
Packing Size:1460×700×80mm
1250×270×170mm
N.W.:34kg/34kg
G.W.:35kg/35kg
20-ft Container:200PCS



1
TON

TL1000-2

Lifting Height:2150mm
Packing Size:1460×700×80mm
1250×270×170mm
N.W.:37kg/37kg
G.W.:38kg/38kg
20-ft Container:190PCS



1
TON

TL1001-1

Lifting Height:2150mm
Packing Size:660×580×85mm
1420×300×180mm
N.W.:26kg/48kg
G.W.:27kg/52kg
20-ft Container:165PCS



2
TON

TL1001-2

Lifting Height:2170mm
Packing Size:850×580×85mm
1470×300×180mm
N.W.:27kg/53kg
G.W.:28kg/55kg
20-ft Container:148PCS



3
TON

TL1001-3

Lifting Height:2100mm
Packing Size:
1330×830×110mm
1420×300×210mm
710×180×160mm
N.W.:44kg/71kg/15kg
G.W.:45kg/72kg/16kg



1
TON

TL10010ZS

Lifting Height:2300mm
Packing Size:
1440×430×400mm
N.W.:75kg
G.W.:79kg
20-ft Container:140PCS



HEAVY DUTY ENGINE CRANE



TL100005

Min.Height:615mm
Max.Height:2500mm
Packing Size:1390×980×175mm
N.W.:85kg
G.W.:89.5kg
20-ft Container:100PCS

0.5
TON



TL10010

Min.Height:615mm
Max.Height:2500mm
Packing Size:1390×980×175mm
N.W.:87.5kg
G.W.:92kg
20-ft Container:100PCS

1
TON



TL100005Z

Min.Height:320mm
Max.Height:2120mm
Packing Size:1470×490×290mm
N.W.:75kg
G.W.:87kg
20-ft Container:125PCS

0.5
TON



TL10010Z

Min.Height:270mm
Max.Height:2410mm
Packing Size:1640×510×350mm
N.W.:118kg
G.W.:130kg
20-ft Container:90PCS

1
TON



TL10020Z

Min.Height:310mm
Max.Height:2570mm
Packing Size:1900×630×490mm
N.W.:153.5kg
G.W.:184kg
20-ft Container:45PCS

2
TON

ENGINE LEVELER



TL1010-1 680KG

Packing Size:460×200×55mm
N.W.:5.5kg
G.W.:5.7kg
20-ft Container:5000PCS

ENGINE STAND



TL1110-1

Capacity:750LBS
Operating Height:730mm
Packing Size:850×185×195mm
N.W.:16kg G.W.:17kg
20-ft Container:790PCS



TL1110-2

Capacity:1000LBS
Operating Height:730mm
Packing Size:850×185×195mm
N.W.:18kg G.W.:19kg
20-ft Container:700PCS



TL1110-3

Capacity:1250LBS
Operating Height:850mm
Packing Size:790×275×210mm
N.W.:26kg G.W.:27kg
20-ft Container:640PCS



TL1110-4

Capacity:1500LBS
Operating Height:870mm
Packing Size:900×250×250mm
N.W.:28kg G.W.:29kg
20-ft Container:510PCS



TL1110-5

Capacity:2000LBS
Operating Height:840mm
Packing Size:910×410×170mm
N.W.:38kg G.W.:40kg
20-ft Container:450PCS



ENGINE SUPPORT



TL1120-1

Capacity:0.5TON
N.W.:18kg
G.W.:19kg
Packing Size:
1530×120×120mm
20-ft Container:700PCS

0.5
TON

0.3
TON

TL1120-2

Capacity:0.3TON
N.W.:16kg
G.W.:18kg
Packing Size:
1050×220×80mm
20-ft Container:1500PCS



TELESCOPING GANTRY CRANE



TL1130-1

Capacity: 1TON(2000lbs)
Min. Height: 2380mm
Max. Height: 3620mm
Distance Between Post: 2335mm
Packing Size: 2860×640×360mm
N.W.: 236kg G.W.: 270kg
20-ft Container: 36PCS



1
TON

TL1131-1

Capacity: 1TON
Flange Width: 68-100mm
Packing Size: 235×195×160mm
N.W.: 6.5kg G.W.: 7kg



1
TON

TL1132-1

Capacity: 1TON
Packing Size: 360×140×170mm
N.W.: 6.5kg G.W.: 7kg

LONG RAM PUMP



Model:	Capacity (ton):	Stroke (mm):	Min. Height (mm):	Packing Size (mm):	Net Weight (kg):	20-ft Container (PCS):
TL1203-1	3	480	620	700×150×150	8	1650
TL1203-2	3	480	620	700×150×150	8	1650
TL1205-1	5	480	620	700×150×150	8.5	1550
TL1205-2	5	480	620	700×150×150	8.5	1550
TL1205-3	5	480	620	700×150×150	8.5	1550
TL1208-1	8	480	620	700×150×150	9	1380
TL1208-2	8	480	620	700×150×150	9	1380
TL1208-3	8	480	620	700×150×150	9	1380

Note: Type-1 Designates Single Pump Core, -2 Designates Double Pump Core, And -3 Designates Pneumatic Pump.

HYDRAULIC PIPE BENDER



12
TON

2"

Module Size: 1/2", 3/4", 1", 1-1/4", 1-1/2", 2"

TL0300-1-12

Packing Size: 630×540×180mm
N.W.: 32kg G.W.: 34kg
20-ft Container: 400PCS



16
TON

3"

Module Size: 1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2", 3"

TL0300-1-16

Packing Size: 410×300×160mm 670×610×200mm
N.W.: 20kg/37.5kg G.W.: 21kg/39kg
20-ft Container: 300PCS



12
TON

2"

Module Size: 1/2", 3/4", 1", 1-1/4", 1-1/2", 2"

TL0300-2-12

Packing Size: 770×360×235mm
N.W.: 53kg G.W.: 58kg
20-ft Container: 300PCS



16
TON

3"

Module Size: 1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2", 3"

TL0300-2-16

Packing Size: 770×360×235mm
N.W.: 65kg G.W.: 70kg
20-ft Container: 270PCS

12TON、16TON

Metric System (mm):	British System (in):	Outer Diameter (mm):	Thickness (mm):	Pipe Bending Angle (α):	Working Pressure (Mpa):	Stroke (mm):
15	1/2"	21.25	2.75	$\pi/2 < \alpha < \pi$	61	285
20	3/4"	26.75	2.75	$\pi/2 < \alpha < \pi$	61	285
25	1"	33.50	3.25	$\pi/2 < \alpha < \pi$	61	285
32	1-1/4"	42.25	3.25	$\pi/2 < \alpha < \pi$	61	285
40	1-1/2"	48	3.50	$\pi/2 < \alpha < \pi$	61	285
50	2"	60	3.50	$\pi/2 < \alpha < \pi$	61	285
65	2-1/2"	75.50	3.75	$\pi/2 < \alpha < \pi$	61	285
80	3"	88.50	4	$\pi/2 < \alpha < \pi$	61	285

Note: 12T Max. Bending Capability 2", And 16T Max. Bending Capability 3"

12
TON

2"



Module Size: 1/2", 3/4", 1", 1-1/4", 1-1/2", 2"

TL0300-3-12

Packing Size: 770×350×270mm

N.W.: 46kg G.W.: 54kg

20-ft Container: 400PCS

16
TON

3"



Module Size: 1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2", 3"

TL0300-3-16

Packing Size: 770×350×270mm

N.W.: 58kg G.W.: 66kg

20-ft Container: 350PCS

12TON、16TON

Metric System (mm):	British System (in):	Outer Diameter (mm):	Thickness (mm):	Pipe Bending Angle (α):	Working Pressure (Mpa):	Stroke (mm):
15	1/2"	21.25	2.75	$\pi/2 < \alpha < \pi$	59	230
20	3/4"	26.75	2.75	$\pi/2 < \alpha < \pi$	59	230
25	1"	33.50	3.25	$\pi/2 < \alpha < \pi$	59	230
32	1-1/4"	42.25	3.25	$\pi/2 < \alpha < \pi$	59	230
40	1-1/2"	48	3.50	$\pi/2 < \alpha < \pi$	59	230
50	2"	60	3.50	$\pi/2 < \alpha < \pi$	59	230
65	2-1/2"	75.50	3.75	$\pi/2 < \alpha < \pi$	59	230
80	3"	88.50	4	$\pi/2 < \alpha < \pi$	59	230

Note: 12T Max. Bending Capability 2", And 16T Max. Bending Capacity 3"

HAND PALLET TRUCK



**2
TON**

TL0422-2

Fork Length: 1100mm
Fork Width: 520mm
Min.Height: 75-85mm
Max.Height: 190-200mm
N.W.: 80kg G.W.: 85kg
Packing Size:
2200x560x760 6PCS
20-ft Container: 180PCS

Fork Width 520mm

**2
TON**

TL0422-2A

Fork Length: 1220mm
Fork Width: 685mm
Min.Height: 75-85mm
Max.Height: 190-200mm
N.W.: 80kg G.W.: 85kg
Packing Size:
2200x720x760 6PCS
20-ft Container: 140PCS

Fork Width 685mm

FORK TRUCK



Model:	Capacity (ton):	Stroke (mm):	Max.Height (mm):	Packing Size (mm):	Net Weight (kg):
TL0401	0.5	1200	1550	1100×720×1510	100
TL0402	1	1600	1850	1400×780×1850	220
TL0403	1.5	1600	1850	1400×800×1870	240
TL0404	2	1600	1850	1400×800×1870	270

AIR HYDRAULIC JACK

12
TON



TL1600-1

Stroke:150mm
Min.Height:250mm
Adjustment Height:80mm
Packing Size:240×180×270mm
N.W.:12kg G.W.:13kg
20-ft Container:1400PCS

20
TON



TL1600-2

Stroke:160mm
Min.Height:260mm
Adjustment Height:80mm
Packing Size:400×310×310mm
N.W.:32kg G.W.:33kg
20-ft Container:1030PCS
Remarks:2PCS/CTN

TL1600-3

Stroke:190mm
Min.Height:280mm
Packing Size:305×235×310mm
N.W.:23kg G.W.:24kg
20-ft Container:730PCS



30
TON

50
TON

TL1600-4

Stroke:190mm
Min.Height:280mm
Packing Size:370×300×290mm
N.W.:31kg G.W.:33kg
20-ft Container:730PCS



TL1600-5

Min.Height:210mm
Max.Height:525mm
Packing Size:675×360×280mm
N.W.:46kg G.W.:50kg
20-ft Container:450PCS

22
TON

HEAVY DUTY



TL1600-6

Min.Height:225mm
Max.Height:430mm
Packing Size:640×350×300mm
N.W.:36kg G.W.:38kg
20-ft Container:400PCS

22
TON



TL1600-7

Min.Height:257mm
Max.Height:527mm
Packing Size:640×350×340mm
N.W.:42kg G.W.:44kg
20-ft Container:350PCS

35
TON



HYDRAULIC CYLINDER



NPT $\frac{1}{4}$ / $\frac{13}{16}$



TL1301-1

4TON
Stroke:73mm



TL0100-2A-1

TL1301S-1



TL1301-2

4TON
Stroke:120mm



TL0100-2A-1

TL1301S-2



TL1302-1

10TON
Stroke:58mm



TL0100-2A-1

TL1302S-1



TL1302-2

10TON
Stroke:58mm



TL0100-2A-2

TL1302S-2



TL1303-1

20TON
Stroke:50mm



TL0100-2A-2

TL1303S-1



TL1303-2

20TON
Stroke:150mm



TL0100-2A-3

TL1303S-2



TL1304-1

30TON
Stroke:50mm



TL0100-2A-3

TL1304S-1



TL1304-2

30TON
Stroke:150mm



TL0100-2A-4

TL1304S-2



TL1305-1

40TON
Stroke:50mm



TL0100-2A-5

TL1305S-1



TL1305-2

40TON
Stroke:150mm



TL0100-2A-5

TL1305S-2



TL1306-1

50TON
Stroke:50mm



TL0100-2A-5

TL1306S-1



TL1306-2

50TON
Stroke:150mm



TL0100-2A-5

TL1306S-2



NPT $\frac{3}{8}$ / $\frac{3}{16}$



TL1307-1

75TON
Stroke:50mm



TL0100-2A-5

TL1307S-1



TL1307-2

75TON
Stroke:150mm



TL0100-2A-6

TL1307S-2



TL1308-1

100TON
Stroke:50mm



TL0100-2A-6

TL1308S-1



TL1308-2

100TON
Stroke:150mm



TL0100-2A-6

TL1308S-2



TL1309-1
150TON
Stroke:50mm



TL0100-2A-6

TL1309S-1



TL1309-2
150TON
Stroke:150mm



TL0100-2A-8

TL1309S-2



TL1310-1
200TON
Stroke:50mm



TL0100-2A-6

TL1310S-1



TL1310-2
200TON
Stroke:150mm



TL0100-2A-8

TL1310S-2

Model:	Capacity (ton):	Stroke (mm):	Min.Height (mm):	Outer Diameter (mm):	Inner Diameter (mm):	Ram Diameter (mm):	Oil Tank (cm³):	Working Pressure (Mpa):	Hose Connection Size(cm²):	Head Size (cm²):
TL1301-1	4	73	126	40	28	25	44.9	63	1/4-19 13/16-20	4.9
TL1301-2	4	120	270	40	28	25	90	63	1/4-19 13/16-20	3.8
TL1302-1	10	58	118	56	45	40	92.2	61.6	1/4-19 13/16-20	15.19
TL1302-2	10	140	250	56	45	40	222.5	61.6	1/4-19 13/16-20	15.19
TL1303-1	20	50	176	76	60	48	145	69.4	1/4-19 13/16-20	18
TL1303-2	20	150	276	76	60	48	440	69.4	1/4-19 13/16-20	18
TL1304-1	30	50	185	92	75	56	222	66.6	1/4-19 13/16-20	24.6
TL1304-2	30	150	285	92	75	56	664	66.6	1/4-19 13/16-20	24.6
TL1305-1	40	50	195	108	90	63	320	61.6	1/4-19 13/16-20	31.15
TL1305-2	40	150	295	108	90	63	955	61.6	1/4-19 13/16-20	31.15
TL1306-1	50	50	195	108	90	63	320	77.1	1/4-19 13/16-20	31.15
TL1306-2	50	150	295	108	90	63	955	77.1	1/4-19 13/16-20	31.15
TL1307-1	75	50	175	138	110	80	474.9	77.4	3/8-19 13/16-16	50.24
TL1307-2	75	150	275	138	110	80	1424.8	77.4	3/8-19 13/16-16	50.24
TL1308-1	100	50	175	160	130	95	663.3	73.9	3/8-19 13/16-16	70.84
TL1308-2	100	150	275	160	130	95	1989.9	73.9	3/8-19 13/16-16	70.84
TL1309-1	150	50	185	193	160	102	1004.8	73.2	3/8-19 13/16-16	81.67
TL1309-2	150	150	285	193	160	102	3014.4	73.2	3/8-19 13/16-16	81.67
TL1310-1	200	50	185	218	180	118	1271.7	74.19	3/8-19 13/16-16	109.3
TL1310-2	200	150	285	218	180	118	3815.1	74.19	3/8-19 13/16-16	109.3

FLAT HYDRAULIC CYLINDER



NPT $\frac{1}{4}$ / $\frac{13}{16}$



TL1401-1

2TON



TL0100-2A-1



TL1402-1

4TON



TL0100-2A-1



TL1403-1

5TON



TL0100-2A-2

TL1401S-1

TL1402S-1

TL1403S-1



TL1404-1

10TON



TL0100-2A-2



TL1405-1

20TON



TL0100-2A-3



TL1406-1

30TON



TL0100-2A-3

TL1404S-1

TL1405S-1

TL1406S-1



TL1407-1

50TON



TL0100-2A-5



TL1408-1

75TON



TL0100-2A-5



TL1409-1

100TON



TL0100-2A-5

TL1407S-1

TL1408S-1

TL1409S-1



TL1410-1

150TON



TL0100-2A-5

TL1410S-1

Model:	Capacity (ton):	Stroke (mm):	Min.Height (mm):	Working Pressure (Mpa):	Single Weight (kg):
TL1401-1	2	6/13	31/38	48	0.5/0.55
TL1402-1	4	6/14	33/41	46	0.6/0.7
TL1403-1	5	6/14	33/41	57	0.65/0.8
TL1404-1	10	11	44	62.9	1.2
TL1405-1	20	11	52	70.8	2.5
TL1406-1	30	12	60	67.9	4.2
TL1407-1	50	12	66	77	7
TL1408-1	75	12	79	71	12
TL1409-1	100	12	85	74	15
TL1410-1	150	11	99	73	27

OIL DRAIN TANK



TL2009-1

Capacity:30L
Packing Size:480×445×560mm
N.W.:4.6kg G.W.:5.9kg
20-ft Container:230PCS



TL2009-2

Capacity:75L
Packing Size:480×445×770mm
N.W.:6.2kg G.W.:8kg
20-ft Container:170PCS

VEHICLE RAMP



2.5
TON



TL2010S-1

Max. Tyre Width:240mm
N.W.:8.6kg/pair
G.W.:10.6kg/pair
Packing Size:950×350×350mm
20-ft Container:250PCS

SPRING COMPRESSOR



**NEW
PRODUCT**

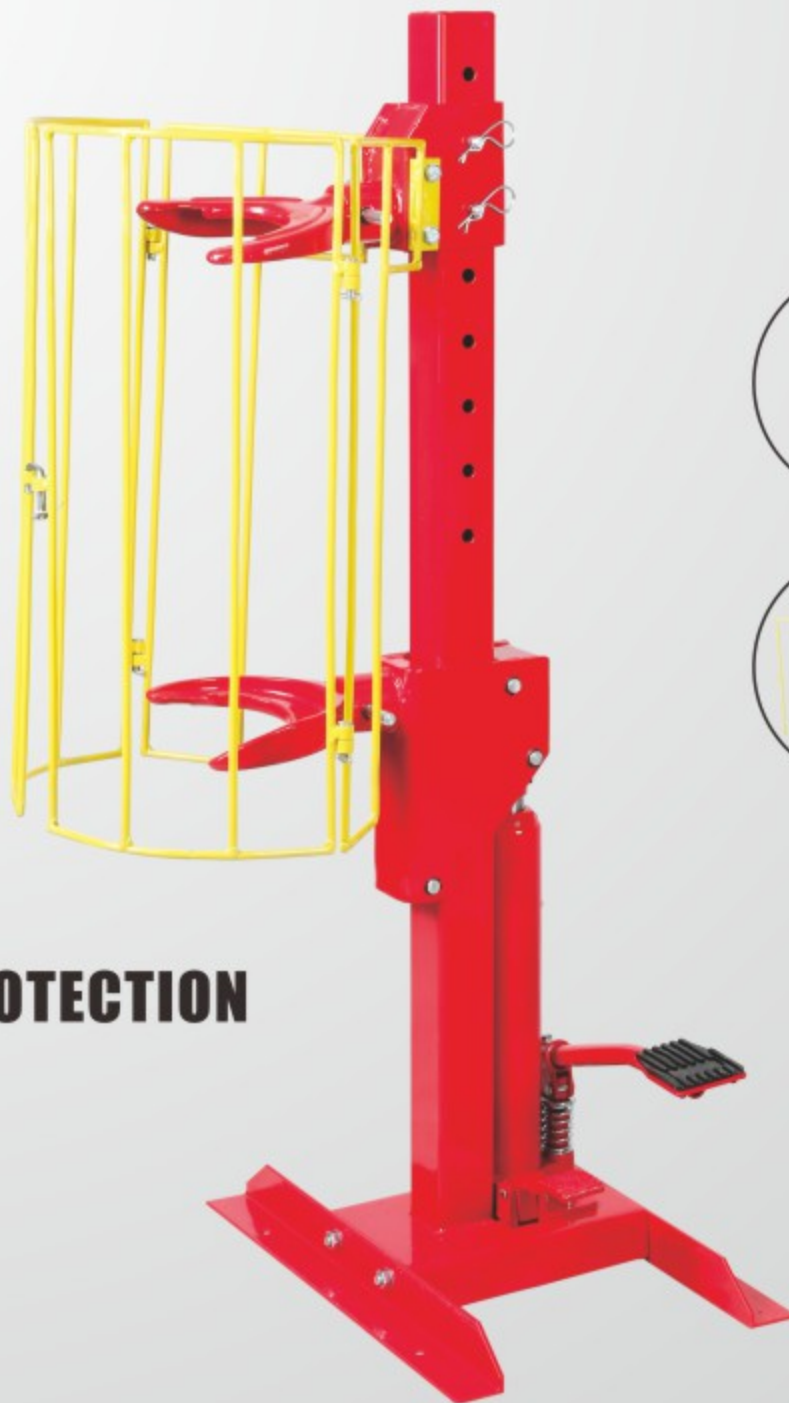

GUARD PROTECTION



TL1500-1

Max.Spring Diameter:1650LBS
Compressed Spring Diameter:100-200mm
Working Length:260mm
Compression Length:100mm
Packing Size:600×190×250mm
N.W.:21kg G.W.:22kg
20-ft Container:890PCS



TL1500-2

Max.Spring Diameter:2200LBS
Compressed Spring Diameter:100-200mm
Working Length:290mm
Compression Length:150mm
Packing Size:700×190×250mm
N.W.:24kg G.W.:25kg
20-ft Container:800PCS

HORIZONTAL



MECHANICAL

TL1500-3

Max.Spring Diameter:2200LBS
Compressed Spring Diameter:200mm
Compression Length:200-500mm
Packing Size:830×350×190mm
N.W.:29kg G.W.:33kg
20-ft Container:300PCS



HYDRAULIC

TL1500-4

Max.Spring Diameter:2200LBS
Compressed Spring Diameter:400mm
Compression Length:210-570mm
Packing Size:1230×290×190mm
N.W.:31kg G.W.:36kg
20-ft Container:300PCS

HYDRAULIC

TL1500-5

Max.Spring Diameter:2200LBS
Compressed Spring Diameter:400mm
Compression Length:210-570mm
Packing Size:1190×290×220mm
N.W.:32kg G.W.:36kg
20-ft Container:300PCS



PNEUMATIC

TL1500-6

Max.Spring Diameter:2200LBS
Compressed Spring Diameter:400mm
Compression Length:210-570mm
Packing Size:1190×290×220mm
N.W.:33kg G.W.:37kg
20-ft Container:300PCS



HYDRAULIC

TL1500-5A

Max.Spring Diameter:2200LBS
Compressed Spring Diameter:400mm
Compression Length:210-570mm
Packing Size:1190×290×220mm
N.W.:33kg G.W.:37kg
20-ft Container:300PCS



PNEUMATIC

TL1500-6A

Max.Spring Diameter:2200LBS
Compressed Spring Diameter:400mm
Compression Length:210-570mm
Packing Size:1190×290×220mm
N.W.:34kg G.W.:38kg
20-ft Container:300PCS

FRAME STRAIGHTENER

MOVABLE



10
TON

TL1700-1

Packing Size:
3040×400×330mm
N.W.:160kg
G.W.:190kg
20-ft Container:50PCS

IMMOVABLE



10
TON

TL1700-2

Packing Size:3030×400×330mm
N.W.:155kg
G.W.:185kg
20-ft Container:50PCS

NEW
PRODUCT

10
TON

TL1700-1A

Packing Size:
3040×400×330mm
N.W.:200kg
G.W.:230kg
20-ft Container:50PCS



MOTORCYCLE LIFT

TL1700-3 800LBS

Max.Height:780mm
Min.Height:220mm
Table Size:1350×500mm
860×500mm
Packing Size:1650×650×360mm
N.W.:97.5kg
G.W.:115kg
20-ft Container:130PCS



TL1700-4 1000LBS

Max.Height:780mm
Min.Height:195mm
Table Size:1800×600mm
800×600mm
Packing Size:1900×750×390mm
N.W.:120kg G.W.:146kg
20-ft Container:50PCS



TL1700-3A 800LBS

Max.Height:780mm
Min.Height:220mm
Table Size:1350×500mm
860×500mm
Packing Size:1750×650×360mm
N.W.:97.5kg
G.W.:115kg
20-ft Container:130PCS



TL1700-4A 1000LBS

Max.Height:780mm
Min.Height:195mm
Table Size:1800×600mm
800×600mm
Packing Size:1900×750×390mm
N.W.:123kg G.W.:150kg
20-ft Container:50PCS



TL1701-1 1500LBS

Max.Height:140mm
Min.Height:415mm
Packing Size:910×495×170mm
N.W.:31kg G.W.:33kg
20-ft Container:450PCS

JACK STAND



3
TON

TL2003-1

Min.Height:285mm
Max.Height:425mm
Packing Size:
220×200×340mm
N.W.:5.0kg
G.W.:5.5kg
20-ft Container:1900PCS



3
TON

TL2003-3

Min.Height:285mm
Max.Height:425mm
Packing Size:
220×200×340mm
N.W.:5kg
G.W.:5.5kg
20-ft Container:1900PCS



6
TON

TL2003-2

Min.Height:395mm
Max.Height:605mm
Packing Size:
290×250×440mm
N.W.:9kg
G.W.:9.5kg
20-ft Container:860PCS



6
TON

TL2003-4

Min.Height:395mm
Max.Height:605mm
Packing Size:
290×250×440mm
N.W.:9kg
G.W.:9.5kg
20-ft Container:860PCS



2
TON



3
TON



6
TON



12
TON



TL2003-7

TL2003-7A

TL2003-8

TL2003-8A

TL2003-9

TL2003-9A

TL2003-10

TL2003-10A

Model	Capacity (ton)	Min. Height (mm)	Max. Height (mm)	Packing Size (mm)	Net Weight (kg)	Gross Weight (kg)	20-ft Container (PCS)
TL2003-7	2	275	420	220×200×340	5	5.2	1900
TL2003-7A	2	275	420	220×200×340	5	5.2	1900
TL2003-8	3	285	425	220×200×340	5.5	6	1900
TL2003-8A	3	285	425	220×200×340	5.5	6	1900
TL2003-9	6	390	605	290×250×440	10	10.5	860
TL2003-9A	6	390	605	290×250×440	10	10.5	860
TL2003-10	12	465	715	320×290×570	24	26	500
TL2003-10A	12	465	715	340×320×570	24	26	440

AIR JACK



TL2004-6



**1.8
TON**

TL2004-6A

TL2004-7A



TL2004-7



Model:	TL2004-6	TL2004-7	TL2004-6A	TL2004-7A
Min.Height:	142mm	170mm	142mm	170mm
Max.Height:	385mm	442mm	385mm	442mm
Air Pressure:	0.6mpa	0.6mpa	0.6mpa	0.6mpa
N.W.:	23kg	24kg	22.5kg	23.5kg
G.W.:	24kg	25kg	23.5kg	24.5kg
Packing Size:	680×340×180mm	680×340×180mm	1000×340×180mm	1000×340×180mm
20-ft Container:	650PCS	650PCS	450PCS	450PCS



TL2004-8



**2.2
TON**

TL2004-8A

TL2004-9A



TL2004-9



Model:	TL2004-8	TL2004-9	TL2004-8A	TL2004-9A
Min.Height:	142mm	188mm	142mm	188mm
Max.Height:	385mm	465mm	385mm	465mm
Air Pressure:	0.6mpa	0.6mpa	0.6mpa	0.6mpa
N.W.:	30kg	31kg	32kg	33kg
G.W.:	31kg	32kg	33kg	34kg
Packing Size:	680×340×180mm	680×340×180mm	1000×340×180mm	1000×340×180mm
20-ft Container:	650PCS	650PCS	450PCS	450PCS

CAR DOLLY



TL2005A-1

Capacity:450kg
N.W.:18.5kg
G.W.:19.0kg
Overall Size:602×385×140mm
Packing Size:650×420×120mm
20-ft Container:800PCS

VEHICLE POSITIONING JACK



TL2005-1 TL2005-2

MECHANICAL

Model:	Specifications:	Capacity (Lbs):	Stroke (mm):	Working Range (mm):	Packing Size (mm):	N.W. (kg):	G.W. (kg):
TL2005-1	9"	1500	250	300-550	550×550×180	17	18
TL2005-2	12"	1500	250	300-550	550×550×180	18	19



TL2005-3 TL2005-4

HYDRAULIC

Model:	Specifications:	Capacity (Lbs):	Stroke (mm):	Working Range (mm):	Packing Size (mm):	N.W. (kg):	G.W. (kg):
TL2005-3	9"	1500	250	300-550	550×550×180	17	18
TL2005-4	12"	1500	250	300-550	550×550×180	18	19

TOOL TROLLEY



TL2006-3

Packing Size: 485×290×340mm
N.W.: 17kg
G.W.: 19kg
20-ft Container: 150PCS

TOOL KIT TL2006-1

Packing Size: 790×430×320mm
N.W.: 14kg
G.W.: 15kg
20-ft Container: 320PCS



7-TRAY TOOL KIT TL2006-2

Packing Size: 730×505×805mm
N.W.: 54kg
G.W.: 56kg
20-ft Container: 100PCS



6-TRAY TOOL KIT TL2006-4

Packing Size: 790×480×800mm
N.W.: 48kg
G.W.: 52kg
20-ft Container: 100PCS



7-TRAY TOOL KIT TL2006-5

Packing Size: 790×480×860mm
N.W.: 53kg
G.W.: 58kg
20-ft Container: 93PCS

CREEPER



TL2007-1 36"

Package Size: 950×465×130mm
N.W.: 6.1kg
G.W.: 6.7kg
40' Container: 1100PCS



TL2007-2 40" ADJUSTABLE HEADREST

Package Size: 1050×470×130mm
N.W.: 7.4kg
G.W.: 8kg
40' Container: 980PCS



TL2007-3 40"

Package Size: 940×435×115mm
N.W.: 7kg
G.W.: 7.5kg
40' Container: 490PCS



TL2007-4 36"

Package Size: 460×160×480mm
N.W.: 7kg
G.W.: 7.5kg
40' Container: 1550PCS





◀ TL2007-5 40" PLASTIC CREEPER

Package Size: 1050×490×95mm
N.W.: 5kg
G.W.: 6kg
20' Container: 550PCS

TL2007-5L ▶ 40" WITH LED

Package Size: 1050×490×95mm
N.W.: 5.2kg
G.W.: 6.2kg
20' Container: 550PCS



◀ TL2007-6 36"

Package Size: 930×420×75mm
N.W.: 3.2kg
G.W.: 3.5kg
20' Container: 960PCS

TL2007-6S ▶ 36"

Package Size: 930×420×75mm
N.W.: 3kg
G.W.: 3.2kg
20' Container: 960PCS



STEEL CAR SEAT

TL2008-1

Overall Size: 368 x 360 x 365mm
Package Size: 360 x 140 x 380mm
N.W.: 3.8kg
G.W.: 4.2kg
20' Container: 1530pcs



TL2008-2 ▶

Package Size: 410×405×155mm
N.W.: 4kg
G.W.: 4.2kg
20' Container: 1100PCS



◀ TL2008-3

Overall Size: 440×360×365mm
Package Size: 365×240×450mm
N.W.: 4.3kg
G.W.: 4.8kg
20' Container: 690PCS



HYDRAULIC BOTTLE JACK



◀ **TL120202**
TL120202B
2TON



◀ **TL120204**
TL120204B
4TON



◀ **TL120206**
TL120206B
6TON



TL120208
8TON



TL120210
10TON



TL120212
12TON



TL120212S
12TON



TL120216
16TON

Model:	TL120202/TL120202B	TL120204/TL120204B	TL120206/TL120206B
Capacity(Ton):	2	4	6
Min.Height(mm):	148	180	185
Max.Height(mm):	278	340	340
Lifting Height(mm):	80	110	110
Adjustment Height(mm):	50	50	50
N.W.(kg):	2.3	3.4	4.5
20-ft Container(PCS):	7200/6350	4920/4425	3750/3395

Model:	TL120208	TL120210	TL120212	TL120212S	TL120216
Capacity(Ton):	8	10	12	12	16
Min.Height(mm):	200	200	210	170	225
Max.Height(mm):	385	385	395	305	425
Lifting Height(mm):	125	125	125	85	140
Adjustment Height(mm):	60	60	60	50	60
N.W.(kg):	5.5	6	7.2	6.3	8.5
20-ft Container(PCS):	3090	2835	2350	2520	2000

HYDRAULIC BOTTLE JACK



◀ **TL120220**
20TON



TL120250
50TON



TL120220B
20TON



◀ **TL120216S**
16TON



TL120232
32TON



◀ **TL120100**
100TON

Model:	TL120216S	TL120220	TL120220B	TL120232	TL120250	TL120100
Capacity(Ton):	16	20	20	32	50	100
Min.Height(mm):	180	235	242	255	260	350
Max.Height(mm):	320	440	452	405	415	515
Lifting Height(mm):	90	145	150	150	155	165
Adjustment Height(mm):	50	60	60			
N.W.(kg):	7.7	11	13	14.5	23	76
20-ft Container(PCS):	2195	1558	1500	1170	738	235

DOUBLE STAGES BOTTLE JACK



◀ **TL202002**
2TON
Capacity:2TON
Min.Height:180mm
Max.Height:400mm
Lifting Height:220mm
N.W.:3.5kg
20-ft container:4180PCS



◀ **TL202004**
4TON
Capacity:4TON
Min.Height:160mm
Max.Height:370mm
Lifting Height:170mm
Adjustment Height:50mm
N.W.:4.8kg
20-ft container:3300PCS



◀ **TL202006**
6TON
Capacity:6TON
Min.Height:160mm
Max.Height:370mm
Lifting Height:170mm
Adjustment Height:50mm
N.W.:5.6kg
20-ft container:2400PCS

TL202012▶
12TON

Capacity:12TON
Min.Height:220mm
Max.Height:470mm
Lifting Height:190mm
Adjustment Height:60mm
N.W.:9.5kg
20-ft container:1650PCS



TL202020▶
20TON

Capacity:20TON
Min.Height:235mm
Max.Height:490mm
Lifting Height:190mm
Adjustment Height:60mm
N.W.:13kg
20-ft container:1650PCS



TL202032▶
32TON

Capacity:32TON
Min.Height:235mm
Max.Height:415mm
Lifting Height:180mm
N.W.:17kg
20-ft container:790PCS



WELDING BOTTLE JACK



TL120302
2TON



TL120304
4TON



TL120306
6TON



TL120308
8TON



TL1203010
10TON



TL1203012
12TON



TL1203016
16TON



TL1203020
20TON



TL1203032
32TON



TL1203050
50TON



TL1203070
70TON

Model	Capacity (Ton)	Min Height (mm)	Max Height (mm)	Lifting Height (mm)	Adjustment Height (mm)	N.W. (kg)	Packing Size (mm)	20-ft Container (PCS)	Remarks
TL120302	2	148	278	80	50	2.26	525×225×180	7000	10PCS/CTN
TL120304	4	170	330	100	60	2.51	355×245×210	6000	6PCS/CTN
TL120306	6	180	360	110	70	3.2	370×255×220	4800	6PCS/CTN
TL120308	8	190	380	120	70	4.4	265×265×230	4200	4PCS/CTN
TL120310	10	190	380	120	70	5.3	285×285×230	3300	4PCS/CTN
TL120312	12	200	395	125	70	5.6	305×160×240	3100	2PCS/CTN
TL120316	16	200	395	125	70	6	315×165×240	2800	2PCS/CTN
TL120320	20	200	395	125	70	7.8	340×178×240	2200	2PCS/CTN
TL120332	32	250	410	160	-	12.5	370×185×290	1300	2PCS/CTN
TL120350	50	250	410	160	-	13.2	205×205×290	1250	1PCS/CTN
TL120370	70	280	460	180	-	15.3	235×235×320	1100	1PCS/CTN

HYDRAULIC TOOL KIT



TL0200-1S ▶

N.W.:22kg G.W.:23kg
Packing Size:530×500×105mm

◀ TL0200-1T

N.W.:23kg G.W.:25kg
Packing Size:650×450×110mm



4
TON

◀ TL0204A

Stroke:18mm
Min.Height:40mm

2
TON

TL0202A ▶

Stroke:73mm
Min.Height:135mm



10
TON

◀ TL0210A

Stroke:58mm
Min.Height:118mm



4
TON

◀ TL0204B

Stroke:125mm
Min.Height:270mm



10
TON

TL0210B ▶

Stroke:135mm
Min.Height:358mm



2
TON

◀ TL0202

Stroke:120mm
Max.Length:575mm



5
TON

◀ TL0205A

Stroke:130mm
Max.Length:665mm

NPT $\frac{1}{4}$ / $\frac{13}{16}$

TL0200-1X

2
TON

Capacity:2TON
Stroke:100mm
Ram Diameter:38mm
N.W.:10kg
Packing Size:470×170×80mm



HYDRAULIC TOOL KIT



TL0200-2 10TON

N.W.:36kg G.W.:37kg Packing Size:750×340×210mm



▲ TL0100-2B-2CB
HAND PUMP WITH METER



10 TON
◀ TL0010-6
Inner Diameter: $\varnothing$ 33



4 TON
◀ TL0204A
Stroke:18mm
Min.Height:40mm



10 TON
◀ TL0210B
Stroke:135mm
Min.Height:358mm



10 TON
◀ TL0210A
Stroke:58mm
Min.Height:118mm



5 TON
◀ TL0205A
Stroke:130mm
Max.Length:665mm



10 TON
▶ TL0210
Stroke:130mm
Max.Length:715mm



2 TON
◀ TL0202A
Stroke:73mm
Min.Height:135mm



2 TON
◀ TL0202
Stroke:120mm
Max.Length:575mm



4 TON
◀ TL0204B
Stroke:125mm
Min.Height:270mm



5 TON
▶ TL0205A
Stroke:130mm
Max.Length:665mm



4 TON
◀ TL0204A
Stroke:18mm
Min.Height:40mm



4 TON
◀ TL0004-6
Inner Diameter: $\varnothing$ 22



TL0200-3 5TON

N.W.:27kg G.W.:28kg Packing Size:750×340×210mm

HAND PUMP WITH METER



▲ TL0100-2B-2CB

PNEUMATIC FOOT PUMP



TL0100-4-1

Work Pressure: 70Mpa
Oil Tank: 0.625L
N.W.: 14.5kg G.W.: 15kg
Packing Size: 410×390×220mm
Remarks: 2PCS/CTN



TL0100-4-2

Work Pressure: 70Mpa
Oil Tank: 1.6L
N.W.: 12.5kg G.W.: 13kg
Packing Size: 340×310×250mm
Remarks: 2PCS/CTN



TL0100-4-3

Work Pressure: 70Mpa
Oil Tank: 3L
N.W.: 8kg G.W.: 8.5kg
Packing Size: 360×205×215mm

ELECTRICAL PUMP

Model	Pressure(MPA)		Flux(L/MIN)		Power(RW)
	LOW	HIGH	LOW	HIGH	
TL0100-6A	5	63	2	9	3
TL0100-6B	5	63	2	14	3

Model	Rotate Speed(R/MIN)	Tank(L)	Size(mm)
TL0100-6A	1450	50L	540×440×780
TL0100-6B	1450	60L	540×440×880



TL0100-6A



TL0100-6B

PULL-BACK RAM



TL0202



TL0205



TL0205A



TL0210



TL0220

Model	Stroke (mm)	Max.Length (mm)	Packing Size (mm)	N.W. (kg)	G.W. (kg)	Remarks
TL0202	120	575	600×290×230	21	22	8PCS/CTN
TL0205	130	665	685×285×200	33	35	6PCS/CTN
TL0205A	130	665	685×285×200	35	37	6PCS/CTN
TL0210	130	715	680×340×210	31	33	4PCS/CTN
TL0220	200	980	920×190×150	20	23	1PCS/CTN



NPT 1/4" / 13/16"



PORTABLE PUMP FOR SHOP PRESS

WORKING PRESSURE:63MPA



PNEUMATIC PUMP

WORKING PRESSURE:63MPA

AIR PRESSURE:0.9MPA



FOOT PUMP



CYLINDERS FOR SHOP PRESS WITH METER



NPT $\frac{1}{4}$ / $\frac{13}{16}$

10TON
TL0100-1A

20TON
TL0100-1B

30TON
TL0100-1C

40TON
TL0100-1D

50TON
TL0100-1E

HYDRAULIC PUMP

WORKING PRESSURE: 63MPA

HAND PUMP



4TON
TL0100-2A-1

HAND PUMP



10TON
TL0100-2A-2

HAND PUMP



20TON
TL0100-2A-3

HAND PUMP



30TON
TL0100-2A-4

HAND PUMP



50TON
TL0100-2A-5

HAND PUMP



100TON
TL0100-2A-6

HAND PUMP



150TON
TL0100-2A-7

HAND PUMP



200TON
TL0100-2A-8

HAND PUMP WITH METER




TL0100-2AB

SPEEDY HAND PUMP



TL0100-2B

SPEEDY HAND PUMP

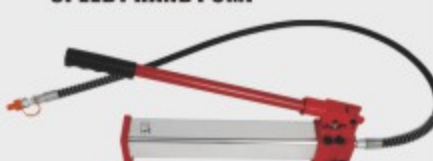

TL0100-2B-2C

SPEEDY PUMP WITH METER



TL0100-2B-2CB

LOG SPLITTER



20
TON

TL1800S-20

Packing Size: 1300×650×540mm
N.W.: 163kg G.W.: 183kg
20-ft Container: 60PCS



32
TON

TL1800S-32

Packing Size: 1300×650×540mm
N.W.: 203kg G.W.: 223kg
20-ft Container: 50PCS

LOG SPLITTER



22
TON

TL1800F-22

Packing Size: 1860×350×500mm
1240×650×500mm
N.W.: 142kg/68kg G.W.: 173kg/97kg
20-ft Container: 35PCS



35
TON

TL1800F-35

Packing Size: 1850×340×580mm
1240×650×580mm
N.W.: 156kg/73kg G.W.: 185kg/102kg
20-ft Container: 35PCS

Description

22 Ton log splitter is equipped with a 190cc engine,
35 Ton log splitter is equipped with a 240cc engine to deliver maximum
splitting force.
Tongli offers the best features in the industry, making splitting wood quicker,
easier and safer!

Including


- Horizontal or vertical splitting
- Engineered cylinder connection for increased strength
- Engineered cast steel foot piece
- Heavy duty hydraulic cylinder producing maximum splitting force
- Reinforced stripper plates remove stuck logs
- Large hydraulic fill cap
- Shielded wedge & channel beam design for safe operation and clean splitting action
- Wide log cradle making splitting wood quicker, easier and safer
- Only one moving bolt and no shims
- Drain plug
- Road tires for towing
- Compatible with certain accessories

Model:	TL1800F-22	TL1800F-35
Engine:	208cc 7HP	414cc 15HP
Pump:	Two-Stage 11 gpm	Two-Stage 16 gpm
Cylinder:	4" Diameter x 24" Stroke	5" Diameter x 24" Stroke
Valve:	Auto-Return	Auto-Return
Max Splitting Force:	22 Tons	35 Tons
Max Log Length:	26"	26"
Cycle Time:	13 Seconds	14 Seconds
Wheels:	4.80 x 8" Road Speed	80 x 8" Road Speed
Wedge:	7" High With Spreader Wings	7" High With Spreader Wings
Beam Size:	6" x 9" With Build In Log Cradle	8" x 10" With Built-In Log Cradle
Hydraulic Capacity:	5.5 Gallons	6.5 Gallons
Filter:	Spin-On Replaceable	Spin-On Replaceable
Height:	43" Horizontal	43" Horizontal
Length:	84.5"	87"
Width:	50"	51"

TL1800-1

Stroke:212mm
Packing Size:1130×260×300mm
N.W.:38kg G.W.:40kg
20-ft Container:300PCS

10
TON

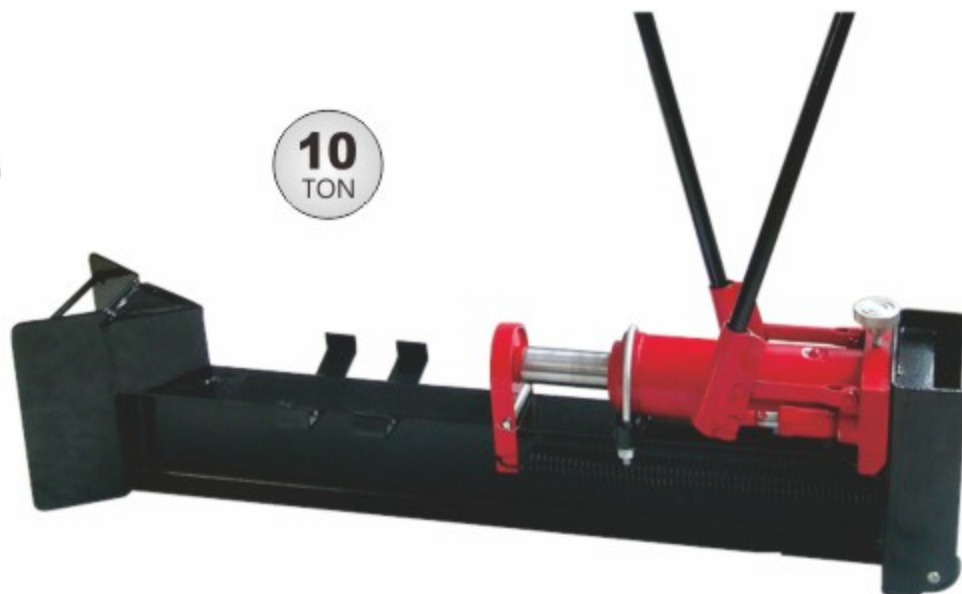

NOTE





Since 1998
MAUNFACTURER



PINGHU TONGLI MACHINE CO.,LTD

Address: 18, Shilong No.1 Road, Caoqiao Street, Pinghu
Economic Development Zone, Zhejiang Province, China
FOREIGN MARKET: 0086-573-85963138 85963388 85963160
HOME MARKET: 0086-573-85962718 85962488 85963181
FAX: 0086-573-85962818
WEBSITE: WWW.TL3318.COM
E-MAIL: TL3318@TL3318.COM