

# V700.1

**2 NEEDLE CHAIN STITCH  
AUTOMATIC BACK POCKET  
HEMMING UNIT**



view more



**VI.BE.MAC.**

# 2 NEEDLE CHAIN STITCH AUTOMATIC BACK POCKET HEMMING UNIT V700.1




EFFICIENCY



QUALITY



EASY HANDLING

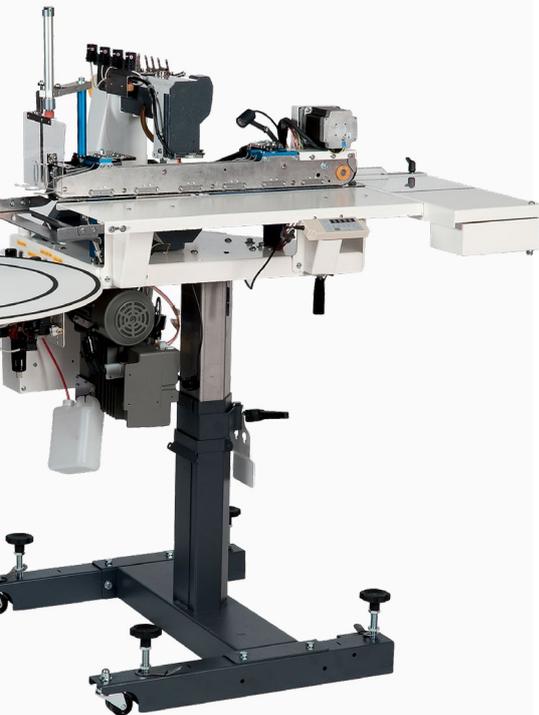

The automatic pocket hemming unit V700.1, 2 needle chain stitch is a flexible unit with a high level of efficiency and quality output. One unit can supply more sewing lines, following the concept of modular production and space maximization.

If supplied along with the loader V070 the V700.1 becomes fully automatic.

The unit can perform an average production of 1800 up to 2000 pockets per hour.

The innovative transport system allows the units to perform on many kind of fabric thickness, from light fabrics to denim and stretch materials.

## ▷ INNOVATIVE PNEUMATIC SYSTEM (PATENTED)

High productivity with no more wave effect or hem arching problems on denim fabric

## ▷▷ ADJUSTABLE FOLDER

Quickly adjust your pocket hem anytime to easily set up different styles according to your needs

## ▷▷▷ EASY ACCESS SYSTEM

Conveyor belt system lifts up and moves forward to provide easy access to the folder and sewing head

## ▷▷▷ MOVABLE SEWING HEAD

The sewing head is mounted on guides, facilitating easy movement and flipping for convenient access during maintenance tasks.

## TECHNICAL SPECIFICATIONS

**Sewing Head:** Vi.Be.Mac. 2 needle chain  
stitch

**Max Sewing Machine Speed:** 3600 rpm

**Max Sewing Head Speed:** 4000 rpm

**Stitch Length:** 0.9 - 5 mm

**Control Box:** XCG MFY 2005

**Sewing Machine Motor:**

Juki XCG 554 20Y - 550 W

**Power Supply Voltage:** 220 V 50/60 Hz

**Air Consumption:** 3 L/min

## NEEDLE GAUGES

- ✓ Standard needle gauge: 1/4" (6.4 mm)
- ✓ Optional needle gauges (2 needles): 3/16" (4.8 mm) - 9/32" (7.2 mm) - 3/8" (9.5 mm)
- ✓ Optional needle gauge (3 needles): 1/2" (12.7 mm)

## FEATURES

- › Air compressed economizer working ONLY when chain cutter is activated
- › Automatic cut at beginning and at the end programmable with a specific control panel
- › Stacker
- › Thread breakage sensor
- › Automatic thread trimmer
- › One leg adjustable stand
- › Innovative pneumatic transport system (PATENTED)
- › Control panel to adjust chains at beginning and end of the pocket
- › Easy maintenance and setup of the unit
- › The rotating storage disk can contain up to 600 pocket and while unit is working the disk full of pockets can be replaced in 5 seconds with an empty one

## OPTIONAL


- Manual label insertion device
- Second storage disk
- Loader V070



2 NEEDLE  
CHAIN STITCH




COIN POCKET

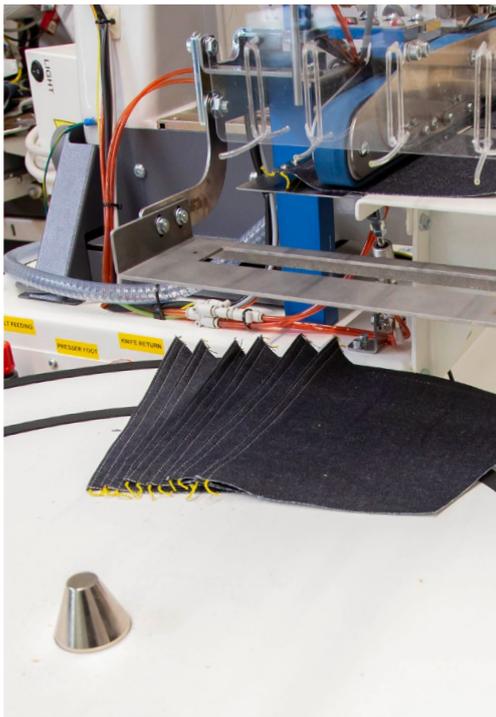

## GET IN TOUCH



## FOLLOW OUR SOCIALS

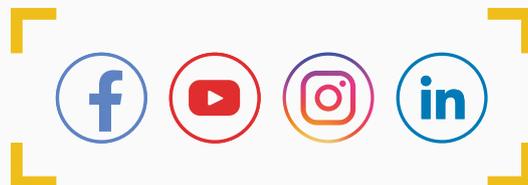

**VI.BE.MAC.**



**VI.BE.MAC. S.p.A.**

**Società soggetta a direzione e coordinamento di Jack Europe S.à.r.l.**

Via Monte Pastello, 7/i - 37057 San Giovanni Lupatoto (VR), Italy

[vibemac@vbm-grp.com](mailto:vibemac@vbm-grp.com) - [sales@vbm-grp.com](mailto:sales@vbm-grp.com) - [customercare@vbm-grp.com](mailto:customercare@vbm-grp.com)

Tel. [+39 045 8778151](tel:+390458778151) / [8778152](tel:+390458778152)



[www.vibemac.com](http://www.vibemac.com)

