


Hai bisogno di riparare l'acciaio?
Do you need to repair steel?

DENT PULLER
Acciaio - Steel

SW 18 - 28 - 58 LAB






QUICK LINK !

- Riparazione di ammaccature e raddrizzamento di lamiere sottili
- Differenti funzioni per tanti utilizzi della carrozzeria
- Facile da usare: la regolazione del tempo e della potenza sono indicate in una tabella di aiuto
- Pistola con grilletto: il punto di saldatura è comandato attraverso il grilletto
- Pistola con innescò a contatto: il punto di saldatura si genera appena l'utensile è a contatto con il pezzo da raddrizzare (solo su SW58)

- Dents repair and straightening of thin metal sheets
- Different functions for many uses on carbody
- Easy to use: time and power settings are indicated in a parameters table
- Gun with trigger: the welding spot is controlled through the trigger
- Contact gun: the welding spot is generated as soon the tool is in contact with the workpiece to be straightened (only SW58)



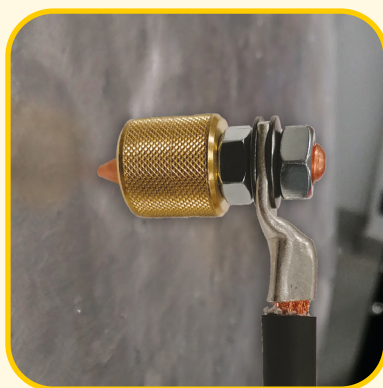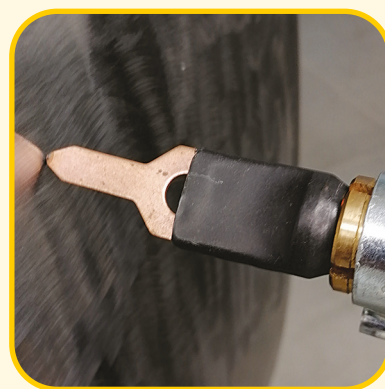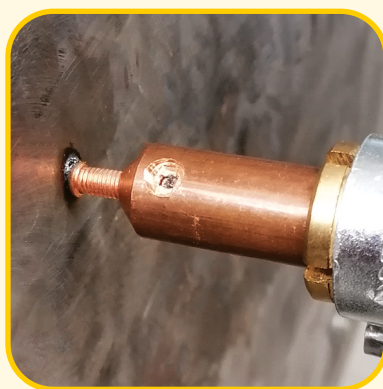

	SW 18 LAB	SW 28 LAB	SW 58 LAB
Campo di regolazione - Welding current range (I ₂ MAX)	3200A	4500A	4500A
Campo di regolazione - Welding current range (I RMS)	1600A	400-2800A	400-2800A
Tensione di alimentazione - Input voltage	1 ph - 220/240V 50/60 Hz	1 ph - 230V 50/60 Hz	
Potenza assorbita - Absorbed power: 50% / Max	1,5 / 3 kW	2,7 / 4 kW	
Fusibile - Fuse	16A		
Metalli saldabili - Weldable Metals	Acciaio, inox, zincato - Steel, inox, galvanized steel		
Trasformatore in Rame - Copper Transformer	–	●	●
Protezione termostatica - Thermostatic Protection	●	●	●
Peso - Weight ≈	16,6 kg	20 kg	21 kg
Dimensioni - Dimensions	315 x 186 x 258 mm	315 x 186 x 258 mm	340 x 218 x 258 mm