

Hogar

Design Stéphane Joyeux





Hogar


Aluminium
Satin-finish PMMA diffuser (models 1 to 4)
IP67 (LED module and driver) / IP44 (GU10 version) / IK10
Class 1 (models 1 to 6) - Class 2 (models 7 and 8)

SOURCES

LED 16W - 2700K warm white (models 5 to 8) (Dimmable on request models 5 and 6)
LED 16W - 3000K warm white (models 5 to 8) (Dimmable on request models 5 and 6)
LED 26W - 2700K warm white
LED 26W - 3000K warm white
LED 35W - 1-10 Volt Dimmable - 2700K warm white
LED 35W - 1-10 Volt Dimmable - 3000K warm white
LED 35W - DALI Dimmable - 2700K warm white
LED 35W - DALI Dimmable - 3000K warm white
GU10 2x9W
LED 26W or 35W - 4000K on request


PRM Average Illuminance 20 lux p.300
Models **1** to **4**

LED 35W	Pathway	Spacing
H 2,50 m	2,50 m	20,00 m




Models **5** and **7**

LED 16W
Real light output - 2376 lm
CRI > 80




Models **6** and **8**

LED 16W
Real light output - 1996 lm
CRI > 80




Models **1** to **3**

LED 26W
Real light output - 1952 lm
CRI > 80




Model **4**

LED 26W
Real light output - 2055 lm
CRI > 80



Models **1** to **3**


LED 35W
Real light output - 2628 lm
CRI > 80



Model **4**

LED 35W
Real light output - 2767 lm
CRI > 80

MODELS




H 600 . W 260 . D 183

1



H 800 . W 260 . D 183

2




H 400 . W 260 . D 183

3




H 105 . W 260 . D 183

4




H 814 . W 250 . D 178

5




H 411 . W 250 . D 178

6




H 827 . W 250 . D 178

7



H 424 . W 250 . D 178

8

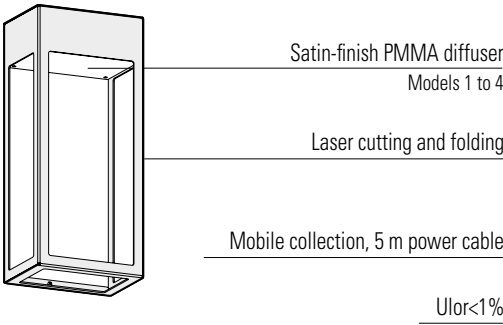

REFERENCES

Replace **●●●** with the colour code / replace **(●)** with the country's electrical plug code

MODELS	GU10 2x9W	LED 26W 2700K warm white	LED 26W 3000K warm white	LED 35W 2700K warm white Dimmable 1-10 Volt	LED 35W 3000K warm white Dimmable 1-10 Volt	LED 35W 2700K warm white Dali Dimmable	LED 35W 3000K warm white Dali Dimmable
1	177 058 ●●●	177 011 ●●●	177 010 ●●●	177 027 ●●●	177 026 ●●●	177 043 ●●●	177 042 ●●●
2	177 060 ●●●	177 015 ●●●	177 014 ●●●	177 031 ●●●	177 030 ●●●	177 047 ●●●	177 046 ●●●
3	177 062 ●●●	177 019 ●●●	177 018 ●●●	177 035 ●●●	177 034 ●●●	177 051 ●●●	177 050 ●●●
4	177 064 ●●●	177 023 ●●●	177 022 ●●●	177 039 ●●●	177 038 ●●●	177 055 ●●●	177 054 ●●●
SPARE DIFFUSER							
165 090 616							

MODELS	LED 16W 2700K warm white	LED 16W 3000K warm white	
5	177 069 ●●●	177 068 ●●●	<i>Dimmable on request</i>
6	177 067 ●●●	177 066 ●●●	<i>Dimmable on request</i>
7	177 073 ●●●(●)	177 072 ●●●(●)	
8	177 071 ●●●(●)	177 070 ●●●(●)	

COLOUR CODES

Replace **●●●** with the colour code

	RAL 9005 JET BLACK	000
	RAL 7021 BLACK GREY	107
	RAL 7044 SILK GREY	105
	RAL 9010 PURE WHITE	101
	RAL 5011 STEEL BLUE	065
	RAL 6025 FERN GREEN	109
	RAL 6021 PALE GREEN	133
	RAL 1016 SULFUR YELLOW	068
	RAL 3013 TOMATO RED	110
	OLD RUSTIC	046

Other colours on request

PLUG CODES

The standard Roger Pradier® plugs are SCHUKO plugs type F
Except for French plugs, replace **(●)** with the country's plug code



UK PLUG **UK**
type G

SWISS PLUG **CH**
type J

MOUNTING

Wiring entry points in grey
Fixing kit included

